MIL-O-27525(USAF)
16 January 1962

MILITARY SPECIFICATION

OVERCOAT, SURVIVAL, ARCTIC SEU-6/P

1. SCOPE

1.1 SCOPE.- This specification covers the requirements for a down-filled cold weather survival overcoat.

1.2 CLASSIFICATION.- The overcoat shall be one type, one size and two classes as specified (6.2):

Class 1 - sage green (3.1.1.1)
Class 2 - Indian orange (3.1.1.1)

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids, form a part of this specification to the extent specified herein.

SPECIFICATIONS

Federal

C-F-160	Feathers, Waterfowl and Down, Waterfowl
CCC-T-191	Textile Test Methods

Military

MIL-B-371	Braid, Textile (Cotton, Tubular)
MIL-T-5038	Tape and Webbing, Textile, Reinforcing, Nylon
MIL-W-5664	Webbing, Elastic Cotton
MIL-T-7807	Thread, Nylon
MIL-F-10884	Fasteners, Snap
MIL-C-16375	Cloth, Cotton, Ulgan
MIL-B-17757	Boxes, Fiber, Corrugated (Modular Sizes)
MIL-F-21840	Fastener, Nylon Tape
MIL-L-40069	Leather, Cattlehide, Chrome-Tanned, Cold-Climate

STANDARDS

Federal

FED-STD-751	Stitches, Seams, and Stitchings

FSC 8415

AF - THE REPUBLICAN PRESS, Hamilton, Ohio
February 18, 1962 1000

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:16Z
Check the source to verify that this is the current version before use.

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	Marking for Shipment and Storage
MIL-STD-130	Identification Marking of U. S. Military Property

DRAWING

Air Force

61B4026	Overcoat, Survival, Arctic, Type SRU-6/P

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 OTHER PUBLICATION.- The following document forms a part of this specification to the extent specified. Unless otherwise indicated, the issue in effect on date of invitation for bids shall apply.

COLOR ASSOCIATION OF THE UNITED STATES, INC.

TCA Cable Numbers and Colors

(Copies of this publication may be obtained from the color Association of the United States, Inc., 200 Madison Ave., NY., N.Y.)

3. REQUIREMENTS

3.1 MATERIALS

3.1.1 OUTER SHELL AND INNER SHELL.- The material for the outer shell and the inner shell shall be nylon taffeta. The warp and the filling yarns shall be continuous filament nylon (6.6). The finished material shall meet the requirements specified in table I.

TABLE I - REQUIREMENTS OF THE FINISHED MATERIAL

Characteristic	Requirement
Weight	1.6, ±0.1, ounces/square yard
Thread count	150 by 125/inch, minimum
Breaking strength	65 by 60 pounds/inch, minimum
Tear strength	2.5 by 2.5 pounds, minimum
Air permeability	3.5 cubic foot/minute/square foot at 1/2-inch water pressure differential, maximum
Water repellency	
Hydrostatic pressure	60 centimeter, minimum
Initial spray rating	90, minimum
Nonfibrous materials	2 percent, maximum
Residual shrinkage	
Warp	2 percent, maximum
Filling	2 percent, maximum
Width	36 inches, minimum

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:16Z
Check the source to verify that this is the current version before use.

3.1.1.1 COLOR.- The color of the finished material shall be sage green USAF color shade No. 1511 for class 1 and Indian orange (Color Card Association Cable Number 70072) for class 2 (1.2 and 6.2).

3.1.1.1.1 COLORFASTNESS.- The colorfastness rating of the dyed material to light after 10 hours of exposure shall be fair.

3.1.1.1.2 MATCHING.- The color shall match the approved shade under natural (north sky) daylight or artificial daylight having a color temperature of 7500 degrees Kelvin and shall be a good approximation to the approved shade under incandescent lamplight at 2600 degrees Kelvin.

3.1.1.2 FINISH AND WATER REPELLENCY.- The fabric shall be heat set, heavily calendered, and water-repellent treated to meet the requirements of table I. Nondurable types of water repellents, such as wax or aluminum or zirconium soaps, shall not be used. Finishing agents shall be nontoxic; the manufacturer's certificate of compliance is acceptable for the finishing agent.

3.1.2 HOOD SPACERS.- The material for the spacers between the inner shell and the outer shell shall conform to type II of MIL-C-16375, natural color.

3.1.3 DIAPHRAGM.- The material for the diaphragm shall be soft nylon netting (marquisette weave), Peterffy Textile Company, New York City, New York, style No. 7000, or equal. The color shall be white.

3.1.4 TAPE.- The tape for the waist adjustment straps, the front closure snap fastener reinforcements, the hood attachment and the waist drawstring channeling shall conform to type III of MIL-T-5038. All tapes shall be 3/4 inch wide except the drawstring channeling tape which shall be 1-1/2 inches wide. The ends of the tapes shall be seared. The color shall be natural.

3.1.5 ELASTIC WEBBING.- The webbing attached to the ends of the waist drawstrings shall conform to class I of MIL-W-5664, natural color, 1/2 inch wide.

3.1.6 DRAWSTRINGS.- The drawstrings for the waist, the hood and the sleeve take-ups shall conform to type I of MIL-B-371, natural color.

3.1.7 DRAWSTRING THONGS AND FRICTION TABS.- The leather for the hood friction tabs and the waist and the sleeve drawstring thongs shall conform to type I, selection A or B of MIL-L-40069, and shall be 2 or 3 ounces thick. The color shall be natural pearl chrome.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:16Z
Check the source to verify that this is the current version before use.

3.1.8 TAPE FOR NECK CLOSURE.- The tape used for the neck closure shall be made of nylon fastener tape conforming to type II closure of MIL-F-21840. The tape shall be 1 inch wide, and the color of the tape shall be white.

3.1.9 DOWN.- The down filling for the overcoat shall conform to type II, class 2, grade A of C-F-160.

3.1.10 THREAD.- The thread for all sewing operations shall conform to type I, class 1, size B of MIL-T-7807. The color shall approximate the color of the basic material.

3.1.11 SNAP FASTENERS.- The snap fasteners shall conform to style 2 (a, b, c, d), finish 5 of MIL-F-10884.

3.2 DESIGN.- The hooded overcoat shall consist of an outer shell and an inner shell of water-repellant-treated, lightweight, nylon cloth, insulated with down. The garment shall be universally sized. Waist and length adjustments shall be accomplished by take-up straps and drawstrings. Front and leg closures shall be effected by snap fasteners, and closures of the hood and the sleeve terminals shall be effected by drawstrings.

3.3 CONSTRUCTION.- The overcoat shall be constructed in accordance with table II, but the manufacturer is not required to follow the exact sequence of operations as listed therein.

3.3.1 STITCHES, SEAMS, AND STITCHINGS.- Unless otherwise specified in table II, stitches, seams, and stitchings shall conform to FED-STD-751. Whenever two or more methods, seams, or stitches are specified for the same operation, any one of them may be used.

3.3.1.1 STITCHES PER INCH.- The range of stitches per inch specified in table II shall be interpreted to mean the minimum and maximum number permitted.

3.3.1.2 ENDS OF STITCHINGS AND THREAD BREAKS.- When not caught in other seams or stitchings, all ends of stitchings shall be backstitched with a continuous stitch for not less than 1/2 inch. Thread breaks shall be backstitched not less than 1/2 inch.

3.4 PATTERNS.- The manufacturer's working patterns shall be identical in size and shape to the patterns referenced on Drawing 61B4026. The working patterns shall be duplicates of the Government patterns which show size, directional lines and notches for proper assembly of all parts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:16Z
Check the source to verify that this is the current version before use.

TABLE II - SEWING OPERATIONS

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
1.	CUTTING.- All component parts of the overcoat shall be cut in strict accordance with the patterns which show size, shape, notches, directional lines, and markings for proper assembling of all parts.			
2.	SHADE MARKING.- All parts shall be marked to insure a uniform shade throughout the overcoat. Metal fastening devices or sewn-on tickets shall not be used for shade marking.			
3.	DRAWSTRING CHANNEL TAPE.- Join the 1-1/2-inch wide tape, with a single row of stitching, 1/16 inch from each edge, at the pattern marks, to the outer side of the bottom panel inner shell.	301	SSa-1	10-12
4.	JOIN SLEEVE PANEL INNER SHELL TO BOTTOM PANEL INNER SHELL.- Start at the front edges, and join approximately 3 inches at the waist, with a single row of stitching, 1/2 inch from the edge.	301	SSa-1	10-12
5.	JOIN SLEEVE PANEL OUTER SHELL TO BOTTOM PANEL OUTER SHELL.- Start at the front edges, and join approximately 3 inches at the waist, with a single row of stitching, 1/2 inch from the edge.	301	SSa-1	10-12
6.	FASTENER REINFORCEMENT TAPES.- Center two 1-inch wide tapes on the snap fastener drill marks on the inside of the right front outer shell panel, and join each tape from the bottom edge to the neck opening, with a single row of stitching, 1/16 inch from each edge of the tape.	301	SSa-1	10-12
	a. Center one, 1-inch wide tape, on the snap fastener drill marks on the inside of left front inner shell panel, and join from the bottom edge to the neck opening, with a single row of stitching, 1/16 inch from each edge of the tape.	301	SSa-1	10-12

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:16Z
Check the source to verify that this is the current version before use.

TABLE II - SEWING OPERATIONS (CONT)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
	b. Center one, 1-inch wide tape, on the snap fastener drill marks on the inside of the right front hood side panel outer shell. Join across the width, with a single row of stitching, 1/16 inch from each edge of the tape.	301	SSa-1	10-12
	c. Center one, 1-inch wide tape, on the snap fastener drill marks on the inside of the left front hood side panel inner shell, and join across the width, with a single row of stitching, 1/16 inch from each edge.	301	SSa-1	10-12
7.	SNAP FASTENERS.- Stamp the stud portion of the snap fasteners, 24 each, to the outside of the right front outer shell panel, at the drill marks, through the outer shell and the tape.			
	a. Stamp the female portion of the snap fasteners, 12 each, to the outside of the left front inner shell panel, at the drill marks, through the inner shell and the tape.			
	b. Stamp the stud portion of the snap fasteners, 2 each, to the outside of the right outer shell hood side panel, at the drill marks, through the outer shell and the tape.			
	c. Stamp the female portion of the snap fasteners, 2 each, to the outside of the left inner shell hood side panel, at the drill marks, through the inner shell and the tape.			
	d. Stamp the stud portion of the snap fasteners, 6 each, to the outside of the inner shell panel, at the drill marks, through the inner shell and drawstring channel tape at the waist.			

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:16Z
Check the source to verify that this is the current version before use.

TABLE II - SEWING OPERATIONS (CONT)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
8.	WAIST DRAWSTRING TAKE-UP.- Cut two each elastic webbings, 9-1/2-inches long. Join, at one end of each, to the 23-inch lengths of (two each) drawstrings, with a bartack. The ends shall overlap 3/4-inch.	bartack	LSa-1	42 per bartack
	a. THONG.- Place the thong at the center back of the inner shell, centered on the 1-1/2-inch waist channel tape, with the tab to the bottom, and join with a single row of stitching, 1/8 inch from the edge, top and bottom. Punch two each, 1/4-inch diameter holes for the cords. The holes may be punched in the tape before being joined.	301	SSa-1	10-12
	b. Thread the drawstring take-up through the channel. Thread the ends of the cord through the holes in the thong. Knot each end.			
	c. Join the ends of the elastic to the tape and inner shell at the end of the channel, with a single row of stitching, 1/4 inch from the edge.	301	SSa-1	10-12
9.	HOOD FACE TUNNEL.- Cut one piece of 1-inch wide, loop and hook, Velcro tape, or equal, 3-1/4 inches long.			
	a. Join the 3-1/4-inch long, hook tape to the face tunnel outerside. The end of the tape shall be on the center fold of the tunnel piece. The edge shall be 3/4 inch from the right front edge. Sew on all four sides, with a single row of stitching, 1/16 inch from the edge, the hook side out.	301	SSa-1	10-12

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:16Z
Check the source to verify that this is the current version before use.

TABLE II - SEWING OPERATIONS (CONT)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
	b. Join the 3-1/4-inch long, loop tape to the face tunnel outerside, the end of the tape on the center fold of the tunnel piece, the edge 3/4 inch from the left front edge and on the opposite side of the fold so that one tape will be on the inside and one on the outside when the tunnel is finished. Sew with a single row of stitching, 1/16 inch from the edge on all four sides, loop side out.	301	SSa-1	10-12
	c. HOOD FRICTION TABS.- Join the friction tabs, with a single row of stitching, 1/16 inch from the edges and around the curved end. Sew another row of stitching 3/16 inch from each edge. Locate one tab on the center fold of the face tunnel, the straight end 1/4 inch back from the edge of the hook tape on the right front. Locate the other tab on the left front at the center fold, 1/4 inch back from the edge of the loop tape on the opposite side.	301	SSa-1	10-12
	d. Punch holes in the tabs for the drawstring.			
	e. Fold the hood face piece lengthwise in the center, wrong side out, and join across the right end and the bottom edge, with a single row of stitching, 1/4 inch from the edge.	301	SSe-2(a)	10-12
	f. Turn, and raise with a single row of stitching 1/16 inch from folded edge.	301	SSe-2(b)	10-12
	g. Join lengthwise, 3/4 inch from the top folded edge, with a single row of stitching, catching the leather tabs at the front end.	301	OSf-1	10-12
	h. Thread a 34-inch length of drawstring through the friction tabs and the channel. Knot the ends of the drawstring.			

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:16Z
Check the source to verify that this is the current version before use.

TABLE II - SEWING OPERATIONS (CONT)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
	i. Bartack the cord to the channel at the center of the hood face piece.	bartack		42 per bartack
10.	HOOD.- Join the right outer shell top panel to the right outer shell side panel and hood spacer, with a single row of stitching, 1/4 inch from the edge. Place the outer side of the top and the side panels together and the spacer on the inner side of the top panel.	301	SSa-1	10-12
	a. Join the left outer shell top panel to the left outer shell side panel and hood spacer, with a single row of stitching, 1/4 inch from the edge. Place the outer side of the top and the side panels together and the spacer on the inner side of the top panel.	301	SSa-1	10-12
	b. Join the right and the left outer shell top panels and spacer, with a single row of stitching, 1/4 inch from the edge. Place the outer sides together and the spacer on the inner side of the right panel.	301	SSa-1	10-12
	c. Join the right inner shell top panel to the right inner shell side panel and the hood spacer, with a single row of stitching, 1/4 inch from the edge. Place the outer side of the top and the side panels together and the spacer on the inner side of the top panel.	301	SSa-1	10-12
	d. Join the left inner shell top panel to the left inner shell and the hood spacer, with a single row of stitching, 1/4 inch from the edge. Place the outer side of the top and the side panels together and the spacer on the inner side of the top panel.	301	SSa-1	10-12

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:16Z
Check the source to verify that this is the current version before use.

TABLE II - SEWING OPERATIONS (CONT)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
	e. Join the right and the left inner shell top panels and spacer, with a single row of stitching, 1/4 inch from the edge. Place the outer side of the top panels together and the spacer on the inner side of the right panel. f. Cut spacers in the following lengths: Top spacers - 1 each, 2 by 24-1/2 inches Side spacers - 2 each, 2 by 19 inches.			
	g. Close the hood at the right and the left fronts and around the neck opening by folding the edges to the inside 1/4 inch, and join with a single row of stitching, 1/16 inch from the folded edge.	301	SSc-1	10-12
11.	Join the outer collar to the outer shell at the neckline, with a single row of stitching, 1/2 inch from the edge, catching five each, 3-3/4 inch tapes folded in the center, with the raw edges inside. The two outside tapes shall be centered 4-1/2 inches in from the front edges. The three remaining tapes shall be equally spaced between the two outer tapes.	301	SSa-1	10-12
	a. Join the inner collar to the inner shell at the neckline, with a single row of stitching, 1/2 inch from the edge.	301	SSa-1	10-12
12.	JOIN BOTTOM DIAPHRAGM TO INNER AND OUTER SHELL BOTTOM PANELS.- Form the channels by stitching the diaphragm alternately to the inner and the outer shell panels from bottom to top. The channels shall be distributed as shown by the pattern notches.			

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:16Z
Check the source to verify that this is the current version before use.

TABLE II - SEWING OPERATIONS (CONT)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
	a. Join the bottom edge of the diaphragm to the inside of the inner shell bottom panel at the first notch from the bottom edge, with a single row of stitching, 3/8 inch from the edge.	301	SSa-1	10-12
	b. Join the diaphragm at the first notch to the inside of outer shell panel at the first notch from the bottom, with a single row of stitching.	301	SSa-1	10-12
	c. Join the diaphragm at the second notch to the inside of the inner shell at the second notch, with a single row of stitching.	301	SSa-1	10-12
	d. Continue sewing the channels up to the top edge of the diaphragm as in No. 12.b, and 12.c, except at different notches.	301	SSa-1	10-12
	e. When sewing the diaphragm at the twelfth notch to the inside of the inner shell at the seventh notch from the bottom edge, catch in the seam, one each tape 8 inches long, 1/2 inch from the end, directly below each stud portion of the fastener in the drawstring channel.			
	f. Join the diaphragm at the top edge of the bottom panel on the inside of the outer shell, with a single row of stitching, 1/4 inch from the edge of the diaphragm.	301	SSa-1	10-12
13.	REAR SLEEVE.- Join the diaphragm at the bottom edge of the sleeve panel to the inside of the outer shell, with a single row of stitching across the back, 1/4 inch from the edge of the diaphragm.	301	SSa-1	10-12

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:16Z
Check the source to verify that this is the current version before use.

TABLE II - SEWING OPERATIONS (CONT)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
	a. Join the diaphragm at the first notch to the inside of the inner shell at the first notch, with a single row of stitching.	301	SSa-1	10-12
	b. Join the diaphragm at the second notch to the inside of the outer shell at the first notch, with a single row of stitching.	301	SSa-1	10-12
	c. Join the diaphragm at the third notch to the inside of the inner shell at the second notch, with a single row of stitching.	301	SSa-1	10-12
	d. Join the diaphragm at the fourth notch to the inside of the outer shell at the second notch, with a single row of stitching.	301	SSa-1	10-12
	e. Join the diaphragm at the fifth notch to the inside of the inner shell at the third notch, with a single row of stitching.	301	SSa-1	10-12
	f. Join the top edge of the diaphragm to the inside of the outer shell at the third notch, with a single row of stitching, 1/4 inch from the edge of the diaphragm.	301	SSa-1	10-12
14.	FRONT SLEEVE.- Join the diaphragm at the bottom edge to the inside of the outer shell sleeve panel at the waist seam, with a single row of stitching across the front 1/4 inch from the edge of the diaphragm.	301	SSa-1	10-12
	a. Join the diaphragm at the first notch to the inside of the inner shell at the first notch, with a single row of stitching. Take necessary tucks in the diaphragm at the elbows.	301	SSa-1	10-12

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:16Z
Check the source to verify that this is the current version before use.

TABLE II - SEWING OPERATIONS (CONT)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
	b. Join the diaphragm at the second notch to the inside of the outer shell at the first notch, with a single row of stitching.	301	SSa-1	10-12
	c. Join the diaphragm at the third notch to the inside of the inner shell at the second notch, with a single row of stitching. Take necessary tucks in the diaphragm at the elbows.	301	SSa-1	10-12
	d. Join the diaphragm at the fourth notch to the inside of the outer shell at the second notch, with a single row of stitching.	301	SSa-1	10-12
	e. Join the diaphragm 1/4 inch from the edge to the inside of inner shell at the third notch, with a single row of stitching.	301	SSa-1	10-12
15.	SLEEVE INSEAM.- Join the sleeve outer shell inseam, with a single row of stitching, 1/2 inch from the edge.	301	SSa-1	10-12
	a. Start at the waist end of the sleeve inner shell, and join approximately 1-1/2 inches, with a single row of stitching, 1/16 inch from the edge. Turn 3/8 inch to the inside.	301	SSc-1	10-12
16.	JOIN BOTTOM PANELS TO SLEEVE PANELS.- Join the bottom outer shell panel to sleeve outer shell panel at the waist, with a single row of stitching, 1/2 inch from the edge, overlapping the 3-inch seam, 1/2 inch at each side (see No. 5).	301	SSa-1	10-12

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:16Z
Check the source to verify that this is the current version before use.

TABLE II - SEWING OPERATIONS (CONT)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
	a. Join the bottom inner shell panel to the sleeve inner shell panel at the waist, with a single row of stitching, 1/2 inch from the edge, overlapping the 3-inch seam, 1/2 inch at each side (see No. 4). NOTE: In this operation, catch in the seam, one each tape 8 inches long, 1/2 inch from the end, directly above each stud portion of the fastener in the drawstring channel.	301	SSc-1	10-12
17.	SLEEVE TERMINALS.- Close the right sleeve terminal, with a single row of stitching, 1/4 inch from the edge. Take necessary tucks in the inner shell. a. Cut two pieces of the basic material 2-1/2 by 18 inches.	301	SSa-1	10-12
	b. Join the thong to each of the 18-inch long sleeve channels, with a single row of stitching, 1/16 inch from the edge at the top, the bottom, and the ends. Place lengthwise on the center fold, with the pull at the center fold.	301	SSa-1	10-12
	c. Join the ends of the channel, with a single row of stitching, 1/4 inch from the edge, the leather thong on the inside. Punch 1/4-inch holes.	301	SSa-1	10-12
	d. Turn and join to the right sleeve terminal, with a single row of stitching, 3/8 inch from the edge. The leather thong shall be at the inseam and on the outside of the sleeve when completed.	301	BSg-2(a)	10-12
	e. Turn and raise with a single row of stitching, 1/16 inch from the folded edge.	301	BSg-2(b)	10-12

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:16Z
Check the source to verify that this is the current version before use.

TABLE II - SEWING OPERATIONS (CONT)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
22.	JOIN DRAWSTRING CHANNEL TO LEFT SLEEVE TERMINAL.- Join with a single row of stitching, 3/8 inch from the edge. The leather thong shall be at the inseam and on the outside of the sleeve when completed.	301	BSg-2(a)	10-12
	a. Turn and raise with a single row of stitching, 1/16 inch from the folded edge.	301	BSg-2(b)	10-12
	b. Thread the drawstring through the channel. Knot each end of the drawstring.			
	c. Bartack the center of the drawstring to the center of the channel.	bartack		42 per bartack
23.	JOIN HOOD FACE PIECE TO HOOD.- Join the face piece to the hood face opening, with a single row of stitching, 1/16 inch from the edge, the hood overlapping the face piece 1/8 inch.	301	LSa-1	10-12
24.	JOIN HOOD TO COAT.- Join the hood to the tapes on the overcoat collar, with a single row of stitching at the hood neck opening, 1/4 inch from the collar seam to the edge of the hood. The loop end of the tapes shall be on the inside and shall be spaced to match the collar spacing.	301	SSa-1	10-12
25.	MAKE BACK SLIT.- Sew up to the drill mark at the center back, with a double row of stitching, 1/4-inch gage. Slit to the drill mark.	301	SSa-2	10-12
	a. Join the facing to the slit from 1/2 inch below the bottom edge up to and above the end of the slit 1/4 inch, then down 1/2 inch below the bottom edge. Join with a single row of stitching, 3/8 inch from the edge.	301	BSg-2(a)	10-12

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:16Z
Check the source to verify that this is the current version before use.

TABLE II - SEWING OPERATIONS (CONT)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
	b. Turn and raise with a single row of stitching, 1/16 inch from the folded edge. Finish the bottom ends.	301	BSg-2(b)	10-12
26.	SNAP FASTENERS.- Stamp the stud portion of snap fasteners, 5 each, on the outside of the left facing at slit on back of coat. Stamp one 3-1/2 inches up from bottom, and one down 2-1/2 inches from top. Evenly space 3 inches between. a. Stamp the socket portion of snap fasteners, 5 each, on the inside of the right facing at the slit on the back of coat to match the studs. b. Stamp the socket portion of the snap fasteners, 6 each, at the bottom hem of the overcoat to correspond with the stud fasteners on the waist channel tape. NOTE: For all stud portions of snap fasteners that are in contact with the down filling, cement a piece of tape over the inside to prevent the down from working through the holes in the fasteners.			
27.	TOLERANCES a. POSITIONING SNAP FASTENER.- A tolerance of plus or minus 1/16 inch off-center will be allowed for positioning snap fasteners. b. DIMENSIONS.- The tolerances shall be plus or minus 1/16 inch for dimensions under 1 inch, plus or minus 1/8 inch for dimensions from 1 to 5 inches, plus or minus 1/4 inch for dimensions from 5 to 12 inches, plus or minus 1/2 inch for dimensions from 12 to 40 inches, and plus or minus 1 inch on dimension over 40 inches.			

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:16Z
Check the source to verify that this is the current version before use.

TABLE II - SEWING OPERATIONS (CONT)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
	f. Cut two drawstrings 20 inches in length. Thread one through the right sleeve channel. Knot each end of the drawstring.			
	g. Bartack the center of the drawstring to the center of the channel.	bartack		42 per bartack
18.	HEM BOTTOM.- Fold 1-3/8 inch to the inside. Fold under 1/2 inch, and join with a single row of stitching, 1/16 inch from the folded edge.	301	EFb-1	10-12
19.	CLOSE RIGHT FRONT.- Double hem the right front and the collar 3/8 inch, and join with a single row of stitching, 1/16 inch from the folded edge. Fold the hem to the outside.	301	EFb-1	10-12
20.	DOWN FILL.- Each tube and the hood shall be filled with down. The total required weight of the down used to fill the tubes and the hood shall be 15-5/8 ounces, plus or minus 1 ounce. Each tube and the hood shall be fully filled so that no areas are either partially filled or unfilled. The amount of down used in each location shall be as follows:			
	HOOD FACE TUNNEL: 1/8 ounce			
	HOOD: Four compartments 5/16 ounce			
	SLEEVE SECTION: Inner rear tube 1 ounce Outer rear next up 1-5/16 ounce Center shoulder 2-5/16 ounce Outer front (2) 9/16 ounce Inner front (2) 1/2 ounce each			

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:16Z
Check the source to verify that this is the current version before use.

TABLE II - SEWING OPERATIONS (CONT)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
	JOINT TUBES: Blow in each tube, in the A-sections, front and rear, from under each arm. Lowest tube — 5/16 ounce each Next tube up — 5/16 ounce each Second tube up — 5/16 ounce each Third tube up — 7/16 ounce each BOTTOM SECTION: Bottom tube — 5/8 ounce Next 11 tubes — 3/8 ounce each Top 3 tubes — 13/16 ounce each			
21.	CLOSE FILLING OPENINGS.			
	a. HOOD FACE PIECE.- Fold the open end to the inside 1/4 inch, and join with a single row of stitching, 1/16 inch from the folded edge.	301	SSc-1	10-12
	b. HOOD.- Fold the face opening to the inside 3/8 inch, and join with a single row of stitching, 1/16 inch from the folded edge.	301	SSc-1	10-12
	c. COAT.- Double hem the left front 3/8 inch, and join with a single row of stitching, 1/16 inch from the folded edge.	301	EFb-1	10-12
	d. SLEEVE INSEAMS.- Fold the edges of the sleeve inner shell to the inside 3/8 inch, and join with a single row of stitching, 1/16 inch from the edge.	301	SSc-1	10-12
	e. SLEEVE TERMINAL.- Join the left sleeve at the end, with a single row of stitching, 1/4 inch from the edge.	301	SSa-1	10-12

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:16Z
Check the source to verify that this is the current version before use.

3.5 IDENTIFICATION OF PRODUCT

3.5.1 IDENTIFICATION MARKING.- Each overcoat shall be marked for identification in accordance with MIL-STD-130. The marking shall be on the inside of the overcoat, centered in the rear, commencing approximately 1 inch from the neckline and shall contain the following information:

Overcoat, Survival, Arctic, SRU-6/P
MIL-O-27525(USAF)
Order No.*
Stock No.*
Manufacturer's Name or Trademark*

*The manufacturer shall insert the applicable information.

3.5.2 INSTRUCTION MARKING.- Each overcoat shall have instructions, in letters not less than 1/8 inch in height, clearly and legibly printed directly on the outer shell of the left sleeve, commencing approximately 8 inches from the edge of the sleeve and centered on the inside wrist area. The ink used shall be black, water resistant, and shall show good resistance to crocking, both dry and wet, when tested in accordance with applicable test methods specified in CCC-T-191. The instructions shall read as follows:

INSTRUCTION FOR USE: After unpacking, fluff up the overcoat. Tie tapes and drawstring located on inside of waist. Adjust the girth and length. Cuffs and neck should be left open for venting while wearer is active. To close cuffs, grasp leather against heel of hand and pull on strings. Arms may be withdrawn from sleeves for warming or sleeping. Skirt may be worn snapped up like a jacket, long like an overcoat when sleeping, or snapped around each leg for greater insulation under windbreak trouser. Hood face tunnel may be turned back in mild weather or extended for maximum wind protection.

3.5.3 CONTENT LABEL.- A label conforming to state requirements for items containing down or feathers shall be located approximately 2 inches below the identification marking (3.5.1).

3.6 WORKMANSHIP.- The finished overcoat shall be clean, well made, and free from any defects that might affect appearance or serviceability.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:16Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 SUPPLIER'S RESPONSIBILITY.- The supplier is responsible for the performance of all inspection requirements specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any other inspection facilities acceptable to the Government. Inspection records of the examination and tests shall be kept complete and available to the Government as specified in the contract or order. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 INSPECTION FOR ACCEPTANCE.- Unless otherwise indicated hereinafter, inspection shall be in accordance with MIL-STD-105.

4.2.1 TESTING OF COMPONENTS.- Except that this specification shall govern in the event of conflict, testing of components shall be in accordance with applicable subsidiary specifications and drawings referenced herein to the extent applicable. In addition, inspection shall be performed on the components listed in table III for the characteristics noted.

4.2.1.1 SAMPLING FOR TESTING.- Unless specifically requested by the Government, Government-furnished materials shall not be sampled or tests. The sample unit for testing of each component shall be the quantity necessary to perform all required tests one time each. The inspection level for each component shall be L-1 of MIL-STD-105. The acceptable quality level for each characteristic tested shall be 6.5 defects per 100 units.

4.2.1.2 TESTING CRITERIA.- The unit for expressing lot sizes and the sample unit for testing each component shall be in accordance with subsidiary specifications and table I

4.2.2 EXAMINATION OF END ITEMS

4.2.2.1 CLASSIFICATION OF DEFECTS.- Except for defects with an asterisk (*) in the classification column, all defects found during examination shall be classified in accordance with 4.2.2.2 and 4.2.2.3. Defects with an asterisk (*) in the classification column shall be classified as a major defect when affecting appearance or serviceability seriously and as a major A defect when affecting appearance or serviceability but not seriously.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:16Z
Check the source to verify that this is the current version before use.

TABLE III - TESTING OF COMPONENTS

Characteristic	Test Method of CCC-T-191	Determinations Per Sample Unit	Results Reported As
NYLON TAFFETA MATERIAL			
Weight	5041	5	to nearest 0.1 ounce
Thread count	5050	5	to nearest whole No.
Breaking strength	5100	5	to nearest 1.0 pound
Tear strength	5134	5	to nearest 0.1 pound
Air permeability	5450	5	to nearest 0.1 cubic foot
Water repellency			
Hydrostatic pressure	5514	5	to nearest 1.0 centimeter
Initial spray rating	5526	3	Spray rating for each specimen tested
Nonfibrous materials	2611.1	2	to nearest 0.1 percent
Residual shrinkage			
Warp	5552.1	3	separately, not beyond the first decimal place
Filling	5552.1	3	
Colorfastness to light after 10 hours	5660	1	good, fair, or poor
Width	5020	5	to nearest 1/16 or 1/32 inch, depending on scale used

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:16Z
Check the source to verify that this is the current version before use.

TABLE IV - LOT SIZES AND SAMPLE UNITS FOR TESTING

Component	Lot Size Expressed As	Sample Unit For Testing
Taffeta cloth	yards	3-1/2 yards, full width
Wigan	yards	1-1/2 continuous yards, full width
Netting	yards	3-1/2 yards, full width
Tape	yards	7-1/2 yards
Elastic webbing	yards	3 linear yards
Drawstring (braid)	yards	5 yards
Drawstring thong and friction tabs	each	1 piece 12 inches by 12 inches or 8 reinforcement pieces
Down	pound	1 pound
Snap fasteners	sets	25 sets
Labels	1000 each	15 each
Thread 1/	bobbins	sufficient number of bobbins to total a minimum of 360 yards

1/When thread is purchased in the form of cones or spools and on bobbins, thread from each of them shall be tested.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:16Z
Check the source to verify that this is the current version before use.

4.2.2.2 GENERAL DEFECTS.- General defects shall be classified as follows:

	Classification	
	Minor	
Major	A	B
1. MATERIAL DEFECTS AND WORKMANSHIP DAMAGES.- When the condition is weakening or nonweakening, material defects that are inconspicuous and that have a negligible effect on serviceability shall be classified as no defect. When the condition is weakening or nonweakening, workmanship damages that are inconspicuous and that have a negligible effect on serviceability, shall be classified as minor B defects. When the condition is one that definitely weakens the material or when it is conspicuously located so that it is clearly noticeable, material defects and workmanship damages shall be classified as follows:			
a. Any weakening defect such as a smash, multiple float, loose slub, etc, that may develop into a hole	*		
b. Shade bars, slubs, dye or finishing streaks	*		
c. Hole, scissor or knife cut, tear, mend, or burn or a needle chew that may develop into a hole	*		
d. Ruptured fibers in the line of sewing (usually caused by broken, blunt, or hooked needles), affecting appearance or serviceability.		X	
2. SHADE PARTS			
a. Badly shaded parts	*		
3. CLEANNESS			
a. Spots or stains of a permanent nature	*		

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:16Z
Check the source to verify that this is the current version before use.

	Classification		
	Major	Minor A	Minor B
b. Removable spot or stain, clearly noticeable		X	
c. Thread ends not trimmed or loose threads not removed			X
d. One or more shade tickets not removed			X
e. Shade marking of an obvious permanent nature exposed or visible on outside of overcoat (Score only when conspicuously located so that it is clearly noticeable.)		*	
4. CUTTING			
a. Any component not cut in conformance with directional lines indicated on patterns or in accordance with specification requirements	X		
5. COMPONENT AND ASSEMBLY			
a. Unless otherwise classified herein, any component part or required operation omitted		*	
6. SEAMS AND STITCHING			
a. Accuracy of seaming			
(1) Part of overcoat caught in any unrelated operation or stitching		*	
(2) Unless specifically classified otherwise, seams twisted, puckered, or pleated		*	
(3) Thread break(s) or end(s) of stitching (stitch type 301) not backstitched when not caught in other seams or stitching			X
(4) Thread(s) not same shade or not satisfactorily matching shade of overcoat		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:16Z
Check the source to verify that this is the current version before use.

	Classification		
		Minor	
	Major	A	B
b. Gage of stitching (edge, top, or raise stitching) very uneven, not within required range, or varies more than 1/16 inch when no range is specified			X
c. Open seams.- Except on edge or raise stitching, a break in a line of stitching or continuously skipped or run-off stitches constitutes an open seam			
(1) Any open seam (on seams that would allow escape of down from overcoat)	X		
(2) On channel stitching			
-more than 1/2 inch but not more than 1 inch			X
-more than 1 inch		X	
(3) On all other seams			
-1/2 inch or less			X
-over 1/2 inch to and including 1 inch		X	
-over 1 inch	X		
d. Stitches skipped or broken on raise or edge stitching when seam is seamed, turned, and stitched			
-1/4 inch to and including 3/4 inch			X
-over 3/4 inch		X	
e. Raw edges.- Raw edges not securely caught in stitching shall be classified as an open seam			
-1/2 inch to and including 1 inch			X
-over 1 inch		X	
f. Run-offs			
(1) On joining seams, when resulting in an open seam, score as an open seam.			

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:16Z
Check the source to verify that this is the current version before use.

	Classification		
		Minor	
	Major	A	B
(2) On raised or topstitching when not resulting in an open seam (outside only)			
-1/2 to 1 inch inclusive			X
-over 1 inch		X	
g. Seam and stitch types not as specified		X	
h. Stitch tension.- Puckering is evidence of tight tension. When puckering is evident, seam shall be tested by exerting normal pull in lengthwise direction of seam			
(1) Loose tension resulting in a loose seam	X		
(2) Loose tension on raised or edge stitching, resulting in loosely exposed loops of lower or top thread		X	
(3) Tight tension, i. e., stitches break when normal strain is applied, classify as an open seam.			
i. Stitches per inch.- To be scored only when the condition occurs on the major portion of seam			
(1) Less than minimum specified			
-one stitch			X
-two stitches		X	
-three or more stitches	X		
(2) Any number of stitches in excess of maximum specified			X
7. BARTACKS			
a. When bartack is used as the only means of attaching a part to garment			
-one bartack missing or insecure		X	
-two or more bartacks missing or insecure	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:16Z
Check the source to verify that this is the current version before use.

	Classification		
		Minor	
	Major	A	B
8. CHANNELS			
a. Number of channels less than specified	X		
b. Any channel trapped, causing part of channel to remain unfilled	X		
c. Varying from specified width by more than 1/2 inch		X	
d. Badly twisted between rows of channel stitching		X	
e. Any unfilled channel	X		
f. Any partially filled channel		X	
9. DRAWSTRINGS			
a. One or more omitted	X		
b. Not specified type, size, or color		X	
c. Length of one or more drawstrings 1 inch less than specified			X
10. SNAP FASTENERS (APPLYING TO ALL SNAP FASTENERS)			
a. Missing, mis-mated, not securely clinched, broken, bent, or otherwise defective, affecting function			
-one snap fastener		X	
-two or more snap fasteners	X		
b. Rough or sharp edge on one or more studs or sockets	X		
c. One or more studs or sockets not completely clinched through tape (where tape is required)		X	
d. One or more clinched too tightly, i. e., cutting surrounding fabric	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:16Z
Check the source to verify that this is the current version before use.

4.2.2.3 DETAILED DEFECTS OF HOOD AND OVERCOAT.- The detailed defects of the hood and the overcoat shall be classified as follows:

	Classification		
		Minor	
	Major	A	B
1. HOOD			
a. Face tunnel (Velcro tapes, or equal)			
(1) One or both omitted	X		
(2) Length less than 3 inches		X	
(3) Width less than 1 inch		X	
(4) Positioned less than 3/4 inch from front edges			X
(5) Hook tape sewn to left side of tunnel		X	
(6) Long loop tape sewn on right side of tunnel		X	
b. Friction tabs			
(1) One or both omitted	X		
(2) Stitched with one row of stitching		X	
(3) Located less than 1/4 inch from back edge of Velcro tape, or equal			X
c. Drawstring			
(1) Caught in stitching, preventing free use of drawstring	X		
(2) Knot omitted on one or both free ends			X
(3) Not bartacked to center of channel	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:16Z
Check the source to verify that this is the current version before use.

	Classification		
		Minor	
	Major	A	B
(4) One or both reinforcement tapes omitted	X		
(5) Tapes sewn to the outerside of panels		X	
(6) Studs not aligned with sockets, causing bulge or twist on hood		X	
(7) Studs or sockets stamped through single fabric	X		
(8) Stud portion of snap fasteners stamped through left inner shell			X
2. OVERCOAT (BODY)			
a. Neckline tapes (measured from center)			
(1) Two outside tapes less than 3-1/2 inches or more than 4-1/2 inches from finished front edges			X
(2) Space between tapes unequal by more than 1 inch			X
b. Length of snapped fronts			
(1) Uneven at neck by more than 1/4 inch		X	
(2) Uneven in length at bottom by 1/2 inch			X
c. Fronts (inner and outer shell panels)			
(1) One or more reinforcement tapes omitted	X		
(2) Tapes sewn to outerside of panels		X	
(3) Studs or sockets stamped through single fabric	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:16Z
Check the source to verify that this is the current version before use.

	Classification		
		Minor	
	Major	A	B
(4) Studs not align with sockets, causing a bulge or twist on fronts		X	
(5) Stud portion of snap fastener stamped through left inner shell panel			X
d. Inner shell (drawstring channel tape)			
(1) Tape omitted	X		
(2) Tape sewn to the innerside of bottom panel		X	
(3) Female portion of snap fasteners stamped through channel tape	X		
e. Leather thong			
(1) Omitted	X		
(2) Stitched with one row of stitching		X	
(3) Not centered on tape or not on back panel by more than 1 inch			X
f. Drawstrings			
(1) Knot omitted on one or both free ends			X
g. Waist tapes			
(1) One or more tapes omitted		X	
(2) Less than 8 inches long		X	
(3) One or more tapes not positioned directly above or below stud portion of snap fastener		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:16Z
Check the source to verify that this is the current version before use.

	Classification		
		Minor	
	Major	A	B
h. Bottom hem			
(1) Badly twisted		X	
(2) Less than 1-1/8 inches or more than 1-5/8 inches			X
i. Back slit			
(1) Stud portion of snap fasteners stamped through right side of slit		X	
(2) Lower stud positioned less than 3 inches from bottom			X
(3) Upper stud positioned less than 2 inches from top			X
(4) Remaining three studs unevenly spaced by more than 1/2 inch			X
j. Identification marking on inside of overcoat			
(1) Omitted, incorrect, or illegible		X	
(2) Placed more than 2 inches from center back or more than 2 inches below neckline			X
3. SLEEVES			
a. Drawstrings			
(1) Not bartacked to center of channel		X	
(2) Knot omitted on one or both free ends			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:16Z
Check the source to verify that this is the current version before use.

	Classification		
		Minor	
	Major	A	B
b. Terminals			
(1) Less than 2-1/2 inches wide		X	
(2) Less than 18 inches long		X	
c. Leather thongs			
(1) One or both omitted	X		
(2) Not sewn on the outside at outseam		X	
d. Instruction marking on outside of left sleeve			
(1) Missing, incorrect, or illegible	X		
(2) Less than 6 inches or more than 10 inches from bottom of sleeve or more than 2 inches off-center of wrist area			X

4.2.2.4 INSPECTION LEVELS AND ACCEPTABLE QUALITY LEVELS.- The inspection level shall be II of MIL-STD-105 for 4.2.2.2 and 4.2.2.3 (combined). The acceptable quality level for 4.2.2.2 and 4.2.2.3 (combined) shall be 2.5 defects per 100 units for major defects, 15.0 defects per 100 units for major and minor A (combined) defects, and 40.0 defects per 100 units for total major and minor A and B (combined) defects.

4.2.3 EXAMINATION OF PREPARATION FOR DELIVERY REQUIREMENTS.- An examination shall be made to determine if packaging, packing, and marking requirements of section 5 of this specification have been met. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be L-4 of MIL-STD-105, and the acceptable quality level shall be 4.0 defects per 100 units. Shipping containers fully prepared for delivery shall be examined for defects of closure and shall be scored as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:16Z
Check the source to verify that this is the current version before use.

Examine	Defect
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence or method of application
Materials	Any component missing Any component damaged, affecting serviceability
Workmanship	Inadequate application of components, such as: incomplete closure of case liners, container flaps, loose strapping, inadequate stapling Bulging or distortion of containers
Content	Number of intermediate packages is more or less than required.

4.3 TESTS.- The method of testing shall be in accordance with CCC-T-191, whenever applicable. All requirements are applicable to the sample unit.

5. PREPARATION FOR DELIVERY

5.1 PACKAGING

5.1.1 LEVEL A.- The outside row of snap fasteners of each overcoat shall be closed, and each overcoat shall be laid flat. The sleeves shall be folded toward the center of the overcoat. The overcoat shall then be rolled from bottom to top. The rolled overcoat shall be folded in half so that the final size of the rolled overcoat is approximately 15 inches by 11-1/2 inches by 7 inches. The folded and rolled overcoat shall then be secured by two cross-directional ties of cotton tape or twine.

5.1.2 LEVEL C.- Overcoats shall be packed in accordance with the manufacturer's commercial practice.

5.2 PACKING

5.2.1 LEVEL A.- One overcoat packaged as specified in 5.1.1 shall be packed flat within a fiberboard shipping container, assembled, closed, and reinforced to conform to water-resistant class, size No. 1 of MIL-B-17757.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:16Z
Check the source to verify that this is the current version before use.

5.2.2 LEVEL B.- One overcoat packaged as specified in 5.1.1 shall be packed flat within a fiberboard shipping container, assembled, and closed to conform to domestic class, size No. 1 of MIL-B-17757.

5.2.3 LEVEL C.- Overcoats shall be packed in a manner that will insure acceptance by the carrier and safe delivery at destination. Shipping containers shall conform to the rules of carriers and to regulations applicable to the mode of transportation.

5.3 MARKING.- Shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 INTENDED USE.- The overcoat covered by this specification is a component part of a cold weather survival clothing assembly that is vacuum packed in survival kits for the use of flight personnel.

6.2 ORDERING DATA.- Procurement documents should specify the following:

a. Title, number, and date of this specification

b. Class required (1.2 and 3.1.1.1)

c. Selection of applicable levels of packaging and packing.

6.3 COLOR SAMPLES.- Color samples may be obtained from the procuring activity or as directed by the contracting officer.

6.4 Satisfactory results were obtained with continuous filament nylon of 40 denier, having 34 filaments and a twist of 8 turns per inch.

6.5 FIGURES.- Figures 1 and 2 show general style and are for information only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:16Z
Check the source to verify that this is the current version before use.

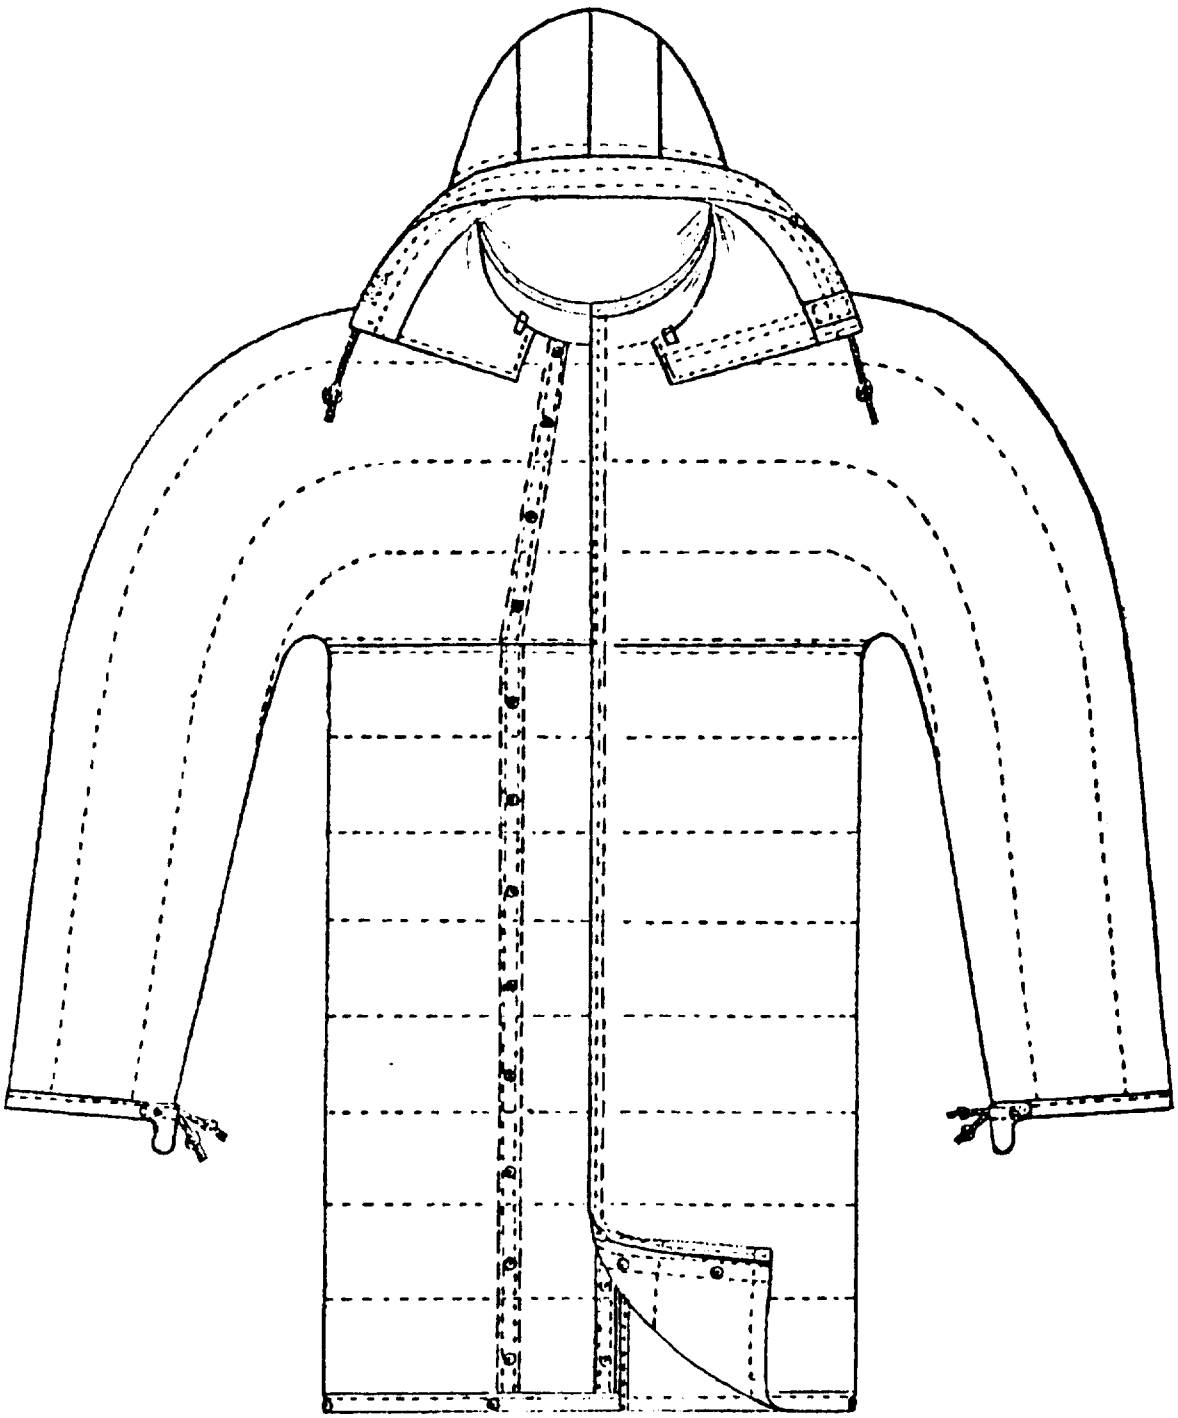


FIGURE 1 - OVERCOAT, FRONT VIEW

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:16Z
Check the source to verify that this is the current version before use.

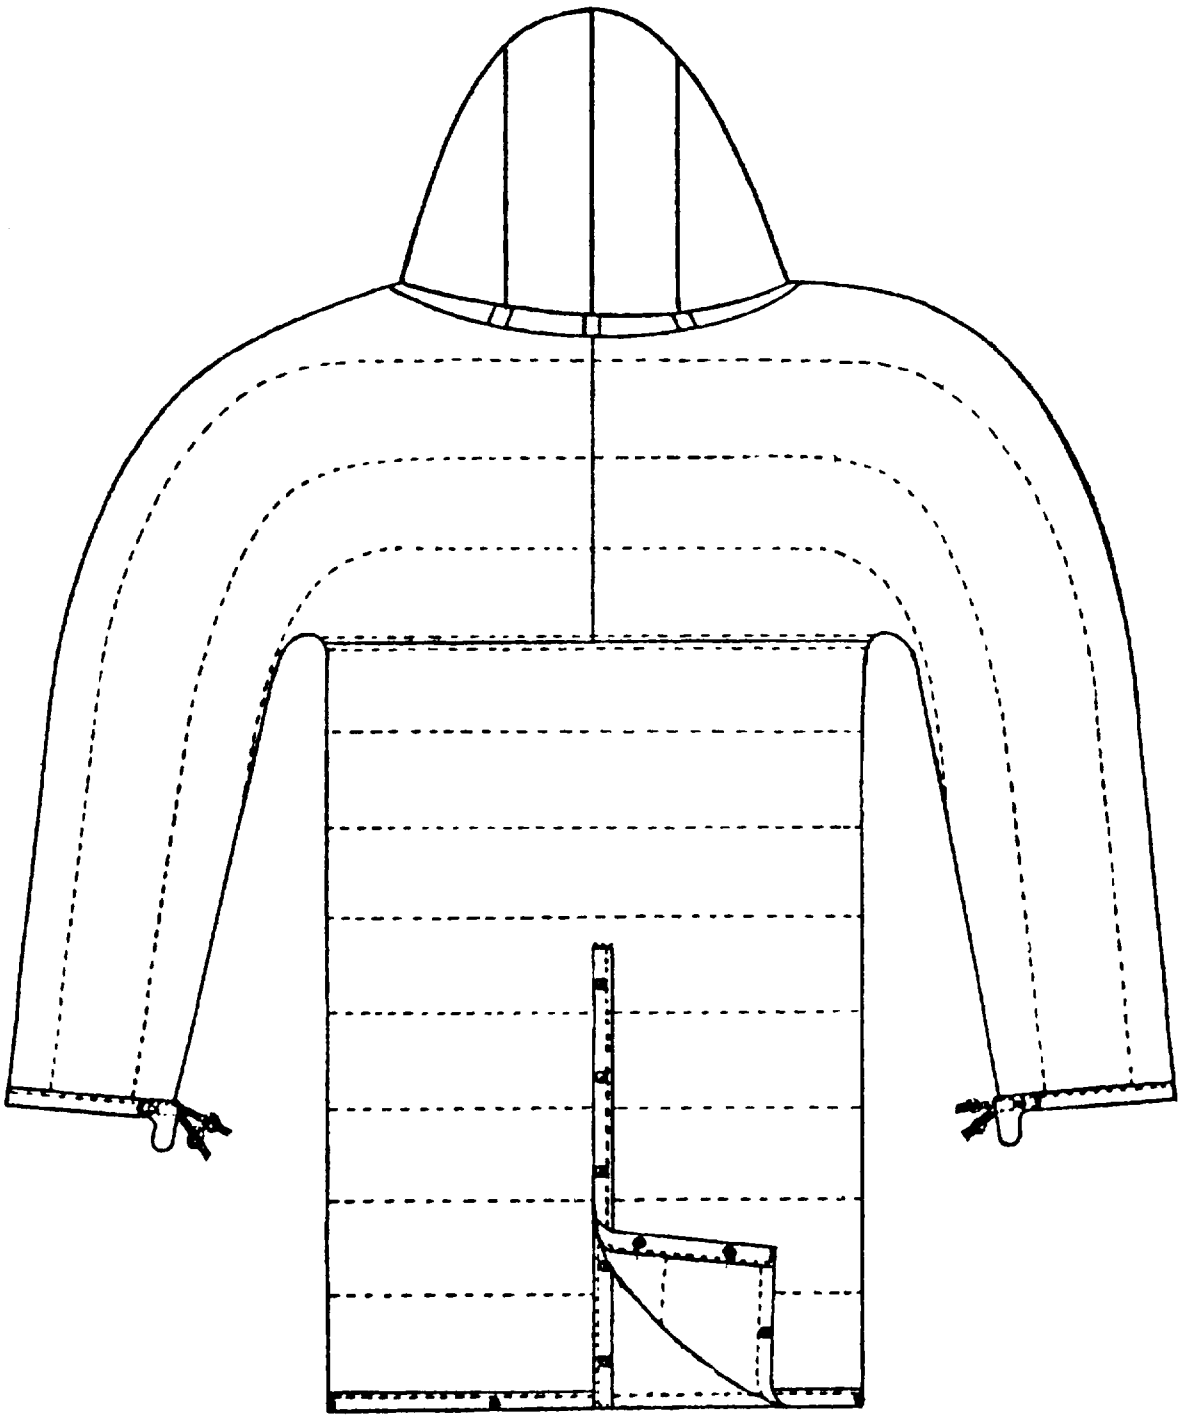


FIGURE 2 - OVERCOAT - BACK VIEW

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:16Z
Check the source to verify that this is the current version before use.

NOTICE.- When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

JNA/rrw
ASNPEP-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:16Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:16Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity *(as indicated on reverse hereof)*.

SPECIFICATION

ORGANIZATION *(Of submitter)* | CITY AND STATE

CONTRACT NO. | QUANTITY OF ITEMS PROCURED | DOLLAR AMOUNT
$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES.

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)* | DATE

DD FORM 1 APR 63 1426 REPLACES NAVSHIPS FORM 4863, WHICH IS OBSOLETE C-8279

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:16Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY

POSTAGE AND FEES PAID
NAVY DEPARTMENT

OFFICIAL BUSINESS

ASD (ASNPS)
Wright-Patterson AFB Ohio 45433

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:16Z
Check the source to verify that this is the current version before use.