MILITARY SPECIFICATION SHEET

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: RECEPTACLE, SOCKET CONTACT, FOR PRINTED CIRCUIT BOARDS AND SOLDERLESS WRAP (.100 INCH CONTACT SPACING) 12, 16, 20, 28, 40, 60, 80, AND 100 CONTACT POSITIONS

(A)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the connectors described herein shall consist of this document and the latest issue of Specification MIL-C-55302.

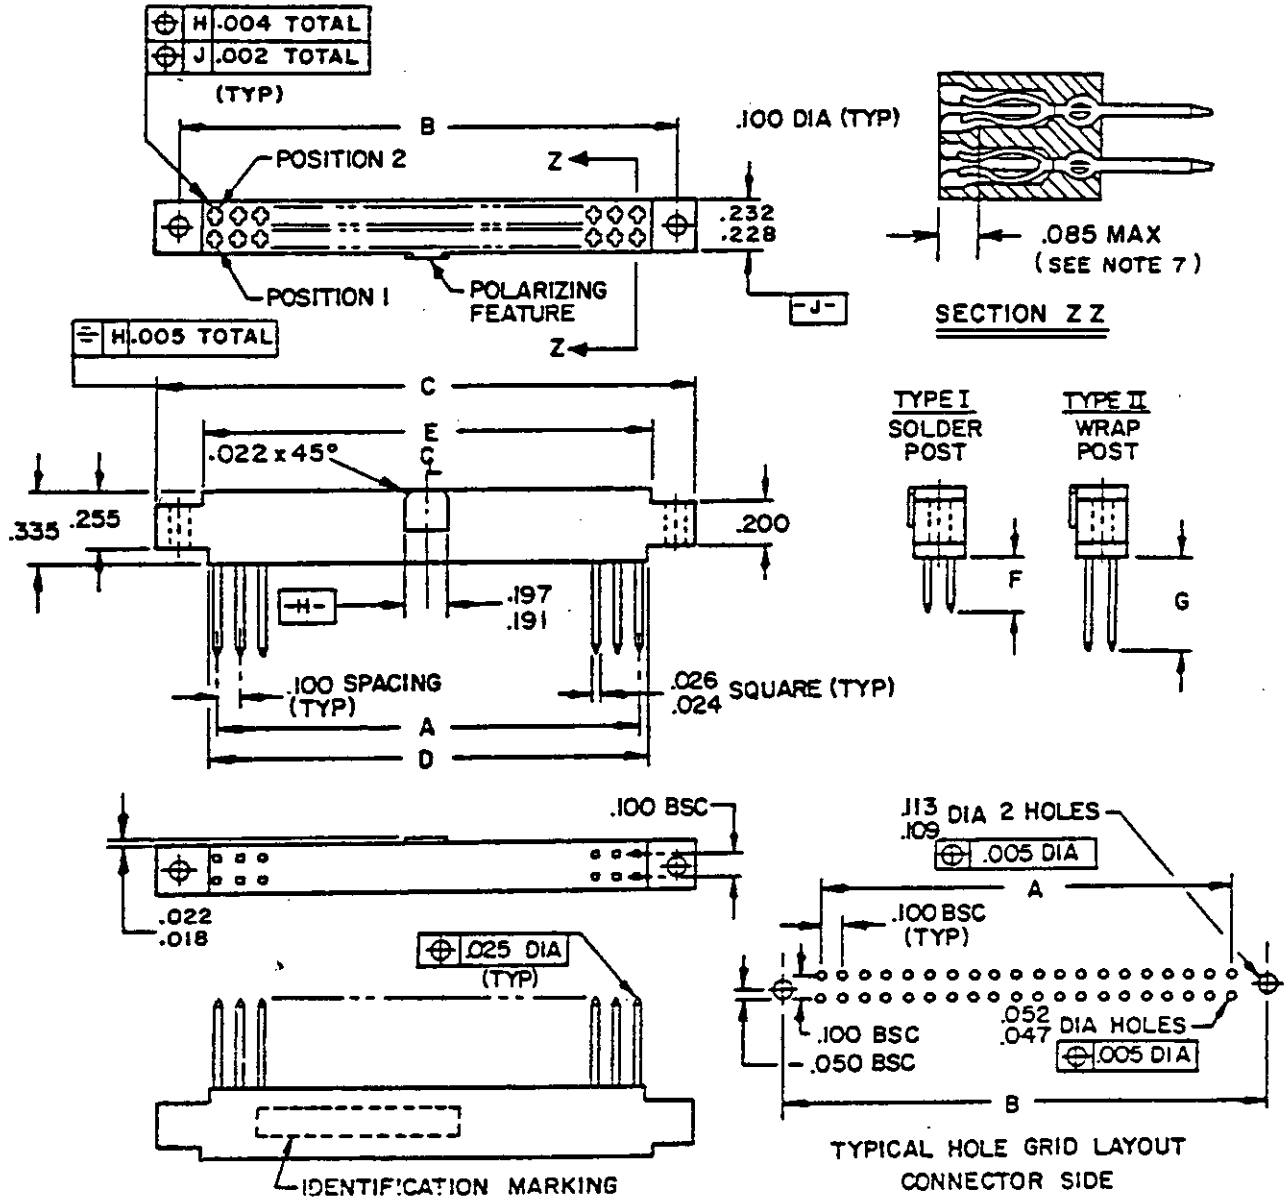


FIGURE 1. Connector, receptacle (.100 inch contact spacing).

(A) denotes changes

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:50Z
Check the source to verify that this is the current version before use.

Dash number	Number of contacts	Type terminal	A Ref.	B ±.010	C ±.005	D ±.010	E ±.010	F ±.020	G ±.020
01	12	I	.500	.840	1.040	.584	.636	.250	
02	12	II	.500	.840	1.040	.584	.636		.570
03	16	I	.700	1.040	1.240	.784	.836	.250	
04	16	II	.700	1.040	1.240	.784	.836		.570
05	20	I	.900	1.240	1.440	.984	1.036	.250	
06	20	II	.900	1.240	1.440	.984	1.036		.570
07	28	I	1.300	1.640	1.840	1.384	1.436	.250	
08	28	II	1.300	1.640	1.840	1.384	1.436		.570
09	40	I	1.900	2.240	2.440	1.984	2.036	.250	
10	40	II	1.900	2.240	2.440	1.984	2.036		.570
11	60	I	2.900	3.240	3.440	2.984	3.036	.250	
12	60	II	2.900	3.240	3.440	2.984	3.036		.570
13	80	I	3.900	4.240	4.440	3.984	4.036	.250	
14	80	II	3.900	4.240	4.440	3.984	4.036		.570
15	100	I	4.900	5.240	5.440	4.984	5.036	.250	
16	100	II	4.900	5.240	5.440	4.984	5.036		.570

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.002	.05	.085	2.16	.570	14.48	1.384	35.15	3.240	82.30
.004	.10	.100	2.54	.584	14.83	1.436	36.47	3.440	87.38
.005	.13	.109	2.77	.636	16.15	1.440	36.58	3.900	99.06
.010	.25	.113	2.87	.700	17.78	1.640	41.66	3.984	101.19
.018	.46	.191	4.85	.784	19.91	1.840	46.74	4.036	102.51
.020	.51	.197	5.00	.836	21.23	1.900	48.26	4.240	107.70
.022	.56	.200	5.08	.840	21.34	1.984	50.39	4.440	112.78
.024	.61	.228	5.79	.900	22.86	2.036	51.71	4.900	124.46
.025	.64	.232	5.89	.984	24.99	2.240	56.90	4.984	126.59
.026	.66	.250	6.35	1.036	26.31	2.440	61.98	5.036	127.91
.047	1.19	.255	6.48	1.040	26.42	2.900	73.66	5.240	133.10
.050	1.27	.335	8.51	1.240	31.50	2.984	75.79	5.440	138.18
.052	1.32	.500	12.70	1.300	33.02	3.036	77.11		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are ±.005 (.13 mm) on three place decimals and ±2° on angles.
4. These connectors mate with connectors specified in MIL-C-55302/115.
5. Type I connectors have solder post terminals.
6. Type II connectors have solderless wrap terminals.
7. A point at which an .020 thick by .050 wide gage having a square face touches the socket contact.

FIGURE 1. Connector, receptacle (.100 inch contact spacing) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:50Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:
Dimensions and configuration: See figure 1.
Contact identification: See figure 1 (position identification relative to polarizing feature).
Material:
Molded plastic insulator - Type MFH per MIL-M-14.
Socket contact: Phosphor bronze, grade A, per QQ-B-750 or copper alloy per QQ-W-321.
(A) Plating:
Socket contact: Gold per MIL-G-45204, type II, grade C, class 1, over nickel plating per QQ-N-290, class 2, 50 to 150 microinches.

Current rating: 3 amperes, maximum.
Keying: See MIL-C-55302/116.

Oversize pin exclusion: .0465 inch diameter pin.

Mating and unmating: The maximum mating force in pounds shall be the number of contacts multiplied by .50 and the minimum unmating force shall be 0.06 times the number of contacts and shall not exceed the measured mating force.

Contact resistance: The average contact resistance of all contacts shall not exceed .010 ohm and no individual contact pair shall have a resistance exceeding .020 ohm.

Contact retention: 3 pounds minimum.

Dielectric withstanding voltage:
Sea level: 600 volts rms.
High altitude : 300 volts rms.

Part number: M55302/114 - (and dash number from figure 1).

Replacement data: The connectors covered by this specification were formerly identified with printed circuits as ML28(__) R-( ).

Custodian:
Army - CR
Navy - EC
Air Force - 17

Review activities:
Army - MI, AR
Navy - AS, OS
Air Force - 11, 17, 85, 99
DLA - ES

User activities:
Army - AT, AV, ME
Navy - MC, SH
Air Force - 19

Preparing activity:
Army - CR

Agent:
DLA - ES

(Project 5935-3098-13)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:50Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. *Attach any pertinent data which may be of use in improving this document.* If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-C-55302/114A

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. *GIVE PARAGRAPH NUMBER AND WORDING.*

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

[ ] YES [ ] NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:50Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
Department of the Army
DOD 314

U.S. MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander
US Army Communications Research & Development Command
ATTN: DRDCO-CM
Fort Monmouth, NJ 07703

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:50Z
Check the source to verify that this is the current version before use.