

MILITARY SPECIFICATION SHEET

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: SOCKET, STRAIGHT-THRU, FOR PRINTED WIRING BOARDS (.200 SPACING)

The complete requirements for procuring the connector described herein shall consist of this document and the latest issue of Specification MIL-C-55302.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

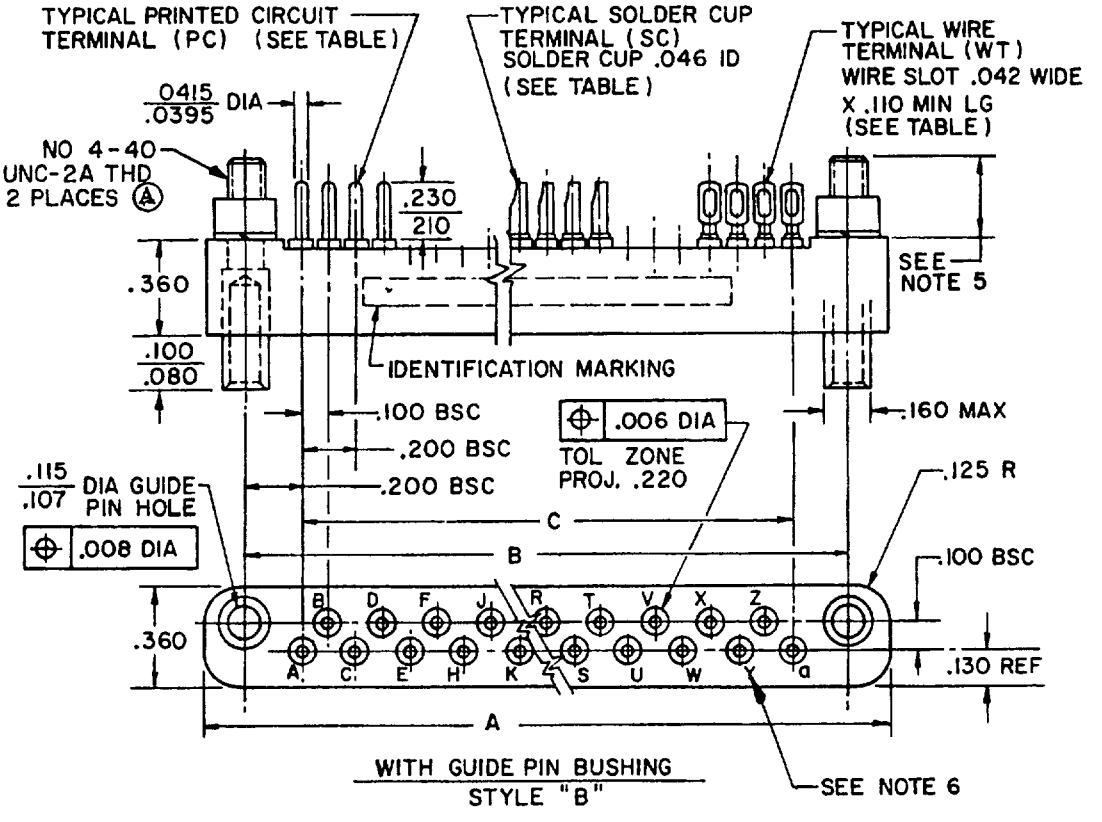

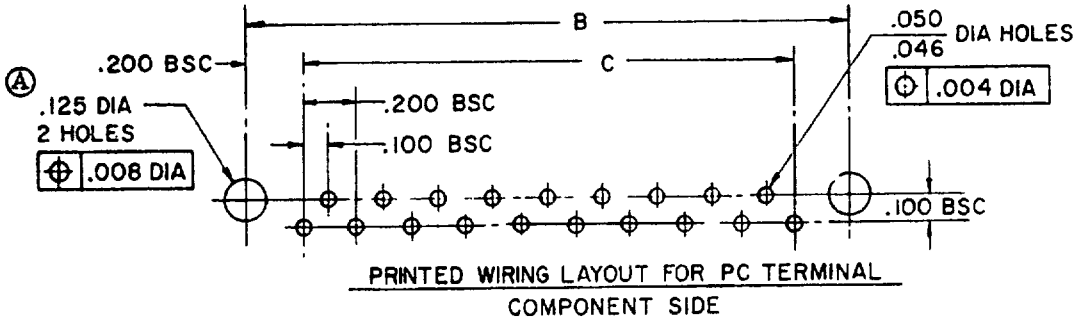


PRINTED WIRING LAYOUT FOR PC TERMINAL
COMPONENT SIDE


Ⓐ denotes changes

FSC 5935


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:44Z
Check the source to verify that this is the current version before use.

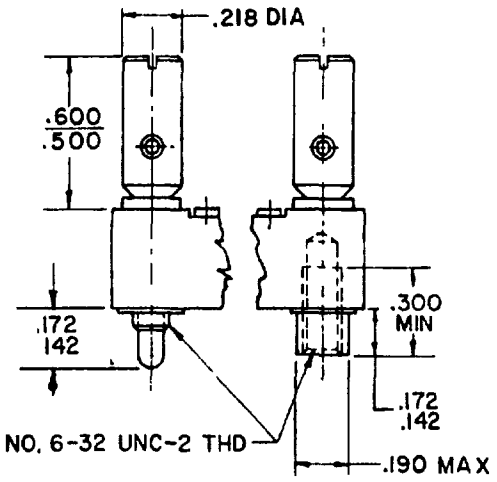

WITH ROTATING SCREWLOCKS
STYLE "C"

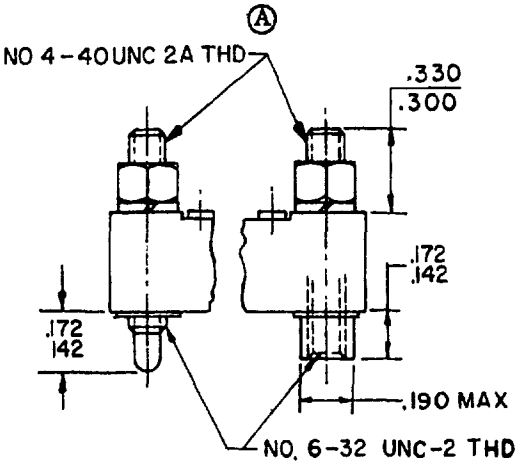

WITH FIXED SCREWLOCKS
STYLE "D"

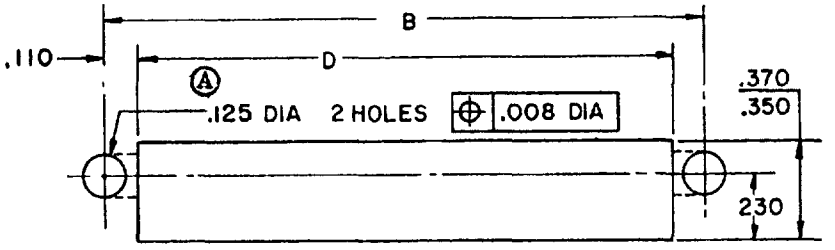

CUTOUT FOR WT & SC TERMINALS
COMPONENT SIDE

TABLE I. Dimensions and part number.

* Guide pin bushing			Rotating screwlocks			Fixed screwlocks			No contacts	Dimensions			
PC	SC	WT	PC	SC	WT	PC	SC	WT		A ±.010	B BSC	C Ref	D ±.010
Part number M55302/17-( )													
Dash No.	Dash No.	Dash No.	Dash No.	Dash No.	Dash No.	Dash No.	Dash No.	Dash No.					
01	07	13	19	25	31	37	43	49	7	1.300	1.000	.600	.780
02	08	14	20	26	32	38	44	50	9	1.500	1.200	.800	.980
03	09	15	21	27	33	39	45	51	11	1.700	1.400	1.000	1.180
04	10	16	22	28	34	40	46	52	15	2.100	1.800	1.400	1.580
05	11	17	23	29	35	41	47	53	19	2.500	2.200	1.800	1.980
06	12	18	24	30	36	42	48	54	23	2.900	2.600	2.200	2.380
55	56	57	58	59	60	61	62	63	37	4.300	4.000	3.600	3.780

*Solder terminations
PC – Printed circuit
SC – Solder cup
WT – Wire terminal

FIGURE - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:44Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.004	.10	.100	2.54	.165	4.19	.350	8.89	1.180	29.97	2.100	53.34
.006	.15	.107	2.72	.190	4.83	.360	9.14	1.200	30.48	2.200	55.88
.008	.20	.110	2.79	.200	5.08	.370	9.40	1.300	33.02	2.380	60.45
.010	.25	.115	2.92	.210	5.33	.500	12.70	1.400	35.56	2.500	63.50
.0395	1.00	.125	3.18	.218	5.54	.600	15.24	1.500	38.10	2.600	66.04
.0415	1.05	.130	3.30	.220	5.59	.780	19.81	1.580	40.13	2.900	73.66
.046	1.17	.150	3.81	.230	5.84	.800	20.32	1.700	43.18		
.050	1.27	.160	4.06	.300	7.62	.980	24.89	1.800	45.72		
.080	2.03			.330	8.38	1.000	25.40	1.980	50.29		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.005 (.13 mm).
4. These connectors mate with connectors specified in MIL-C-55302/16 and /18 and are primarily for use with single-sided and double-sided printed wiring board.
5. Ⓐ Mounting screws for .062 (1.57 mm) and .094 (2.39 mm) thick printed wiring boards shall be .250 (6.35 mm) long.
6. Contact identification letters may be molded as shown on horizontal.

FIGURE - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:44Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions	See figure, table I and note 5.
Material	Style B mounting and guidance hardware shall be brass rod, composition 22, half hard as specified in QQ-B-626, nickel plated .0002" thick per QQ-N-290. Styles C and D mounting guidance hardware shall be corrosion resistant steel per QQ-S-763, class 303, passivated per QQ-P-35.
Contact identification	Shall be alphabetical and sequential in the pattern indicated, using upper case characters followed by lower case characters.
Mating and unmating	The maximum insertion force, in pounds, shall not exceed a value equal to 1.0 times the number of contacts, and the withdrawal force, in pounds, shall be a minimum of 0.25 times the number of contacts, and shall not exceed the measured insertion force.
Contact resistance	The average resistance of all contact pairs measured shall not exceed 0.015 ohm, and no individual contact pair shall have a resistance exceeding 0.020 ohm.
Dielectric withstanding voltage:	
Sea level	1,000 volts rms, 60 cycles, ac.
High altitude	500 volts rms, 60 cycles, ac.
Socket size	20
Wire size	20
Current rating, maximum	7.5 amperes.
Part number	See table I

Custodians:
Army - EL
Navy - EC
Air Force - 11

Review activities.
Army - EL, MI, MU
Navy - SH, AS, OS
Air Force - 11, 17, 80
DSA - ES

User activities:
Army - ME, AT, AV
Navy - MC
Air Force - 19

Preparing activity:
Army - EL

Agent
DSA - ES

(Project 5935-1704-2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:44Z
Check the source to verify that this is the current version before use.