MILITARY SPECIFICATION SHEET

(E) CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES.
RECEPTACLE, SOCKET CONTACTS, STRAIGHT-THRU,
FOR MULTILAYERED PRINTED WIRING-BOARDS (.100 SPACING)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the connectors described herein shall consist of this document and the latest issue of Specification MIL-C-55302.

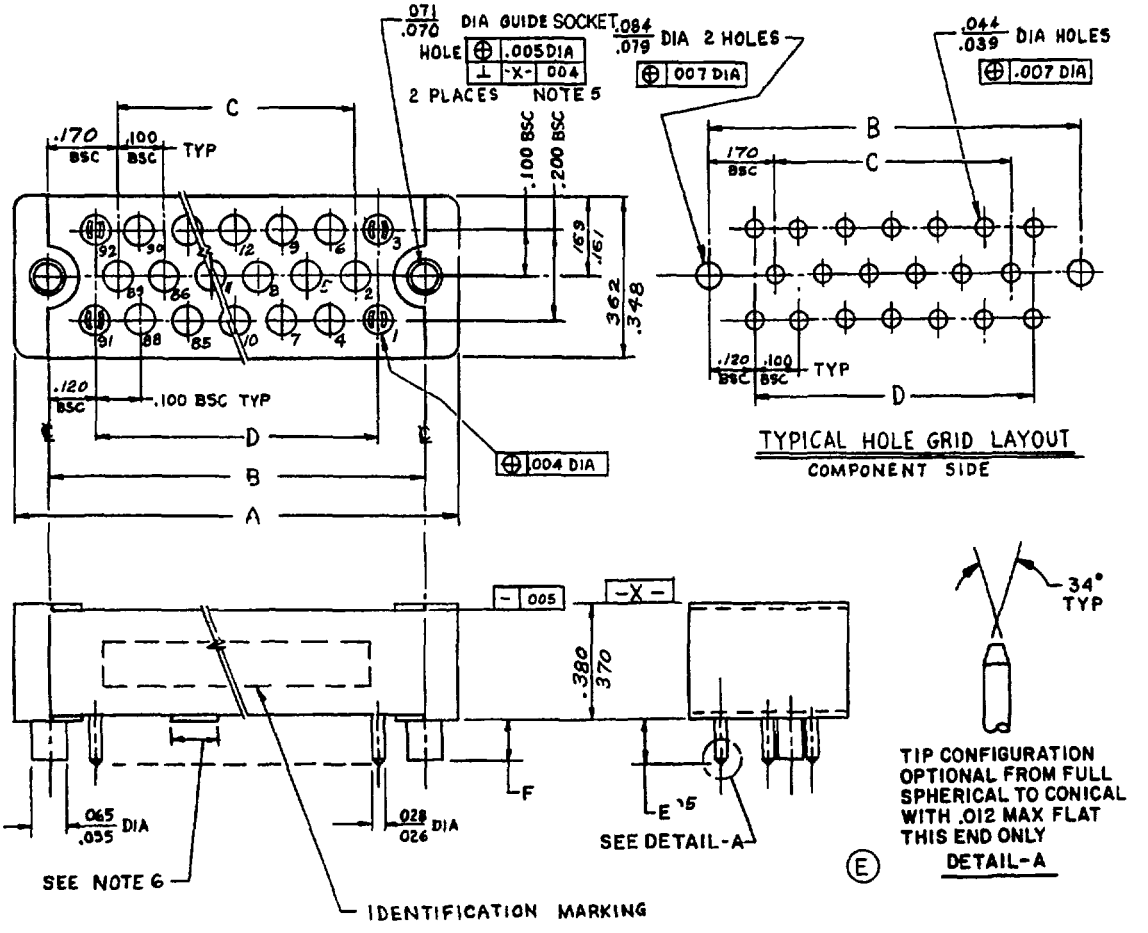


FIGURE 1. Connectors, receptacle (.100 spacing) FSC 5935

(E) denotes changes

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:45Z
Check the source to verify that this is the current version before use.

Part number	No of contacts	A ± 010	B Basic	C Ref	D Ref	E ±.015	F + 008
M55302/22-01	92	3 426	3.240	2.900	3 000	.390	112
M55302/22-02	92	3 426	3 240	2.900	3.000	.158	145
(E) M55302/22-03	92	3.426	3.240	2 900	3 000	.145	.154

INCHES	MM	INCHES	MM	INCHES	MM
.004	.10	.065	1.65	170	4.32
005	13	.070	1.78	.200	5.08
.007	18	071	1 80	.348	8.84
008	.20	079	2.01	362	9.19
010	.25	084	2.13	.370	9.40
012	30	.100	2 54	380	9 65
015	38	.112	2.84	390	9.91
026	66	.145	3.68	2 400	60 96
028	71	.154	3 91	2.900	73 66
039	99	158	4 01	3.000	76 20
044	1.12	.161	4.09	3.240	82.30
055	1 40	.169	4 29	3 426	87 02

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm
3. Unless otherwise specified, tolerances are ±.005 (13 mm) on three place decimals and ±2° on angles.
4. These connectors mate with connectors specified in MIL-C-55302/21 and are primarily for use with single-sided, double-sided, or multilayered printed wiring boards.
5. Positional tolerances of guide pins shall apply at datum plane X
6. Pad(s) suitable for printed circuit board support are optional
   Dimensions and location(s) are optional

FIGURE 1 Connectors, receptacle (100 spacing) - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:45Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:
Dimensions and configuration: See figure 1.
Material:
Guide sockets and guide bushing: Brass composition B, 60,000 to 70,000 PSI tensile, as specified in QQ-W-321, or FC brass as specified in QQ-B-626.
(E) Plating:
Guide sockets and guide bushings: Gold over copper, type II, class 1, grade C, as specified in MIL-G-45204.
Contact: Gold per MIL-G-45204, type II, grade C, Class 1, over nickel plating per QQ-N-290, Class 2, 50 to 150 microinches.
Socket size: 23
Wire size: 22
Current rating: 5 amperes, maximum.
Contact identification: Shall be numerical and sequential in the pattern indicated.

Mating and unmating: The maximum insertion force, in pounds shall not exceed a value equal to .5 times the number of contacts.

Contact engagement and separation force: The individual contact withdrawal force shall be .5 ounce minimum diameter test pin per MS3197-23X1.

Contact resistance: The average resistance of all contact pairs measured shall not exceed .010 ohm, and no individual contact pair shall have a resistance exceeding .020 ohm.

Dielectric withstanding voltage:
Sea level: 1,000 volts rms, 60 Hz, ac.
High altitude: 500 volts rms, 60 Hz, ac.

Part number: M55302/22- (dash number from figure 1).

Custodians:
Army - CR
Navy - EC
Air Force - 17

Review Activities:
Army - AR, MI
Navy - SH, AS, OS
Air Force - 11, 85, 99
DLA - ES
NSA - NS

User activities:
Army - ME, AT, AV
Navy - MC
Air Force - 19
NSA - NS

Preparing activity:
Army - CR

Agent:
DLA - ES

(Project 5935-3095-11)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:45Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government Fold on lines on reverse side, staple in corner, and send to preparing activitv. Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-C-55302/22E

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

HQ, USA CORADCOM
ATTN: DRDCO-CM-DM
Fort Monmouth, NJ 07703

☐ VENDOR ☐ USER ☐ MANUFACTURER

1 ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO

DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:45Z
Check the source to verify that this is the current version before use.

FOLD

HQ, USA CORADCOM
ATTN: DRDCO-CM-DM
Fort Monmouth, NJ 07703

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID



HQ USA CORADCOM
ATTN: DRDCO-CM-DM
Fort Monmouth, NJ 07703

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:45Z
Check the source to verify that this is the current version before use.