INCH-POUND
MIL-PRF-49471/13A(CR)
30 November 2000
Superseding
MIL-PRF-49471/13(CR)
20 April 1998

PERFORMANCE SPECIFICATION SHEET

BATTERY, NON-RECHARGEABLE, LITHIUM MANGANESE DIOXIDE,
HIGH PERFORMANCE, BA-5368/U

This specification is approved for use within the Communications Electronics Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product herein shall consist of this specification and MIL-PRF-49471(CR).

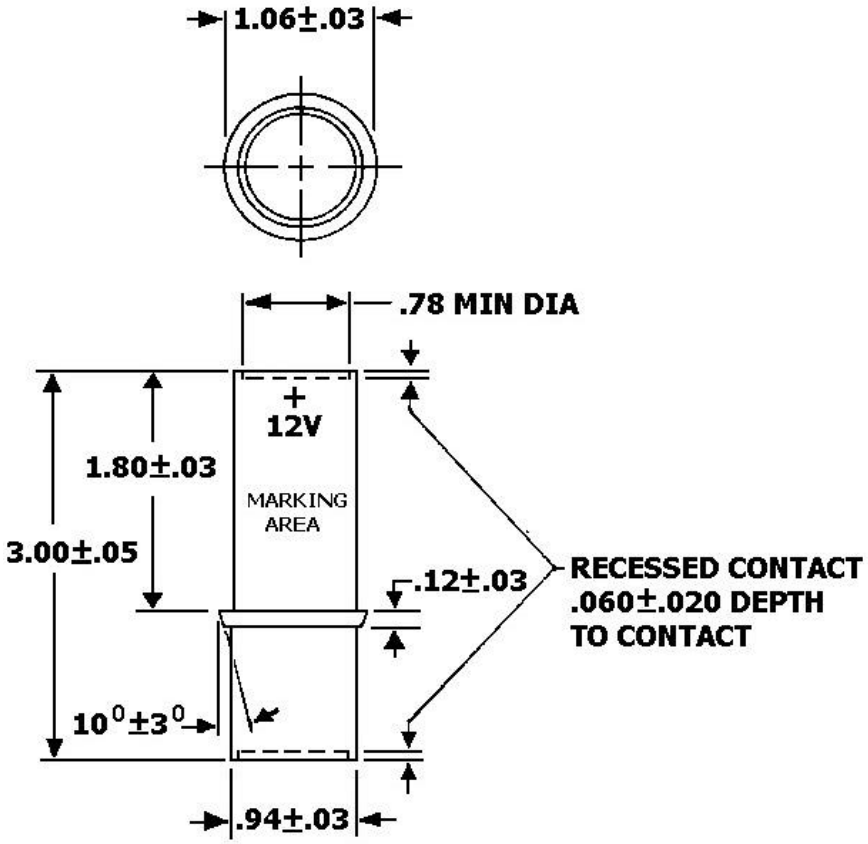


Figure 1. Battery dimensions and terminal markings.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:12Z
Check the source to verify that this is the current version before use.

Notes:
All dimensions are in inches.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Maximum Voltage: 15 volts

Cut-off Voltage for capacity: 9 volts

Terminals: flat surface (see figure 1).

Weight (Maximum): 5.1 ounces (145 grams).

Charge Protection: Applicable.

Battery short circuit test: Applicable.

High temperature protection: Applicable.

Complete discharge device: Not applicable.

State of Charge Indicator: Not applicable

Capacity tests**:** When the battery is tested in accordance with the methods of examination and tests of this specification, the minimum capacity test requirements shall be as specified below.

Capacity test	Minimum Capacity in Hours to 9.0 volts
I	20
L	11
H	20
HT	18
LT	6.5
IT	18
LR1	48

Initial voltage delay: During all tests except the LR1, initial voltage below 9.0 volts cannot exceed a 0.1 second duration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:12Z
Check the source to verify that this is the current version before use.

METHODS OF EXAMINATION AND TEST:

(1) Storage:

Details on storage conditions for all specified capacity tests are described in the basic specification except for the L and LT capacity test conditions: BA-5368/U batteries shall be tested at 14±5ºF in lieu of the -20±5ºF of 4.7.9.1.3 and 4.7.9.1.5.

(2) Discharge

Cells (Forced Discharge): Two cells shall be discharged at 50 milliamperes at 70±5ºF to 2.25 volts. Each discharged cell shall then be connected in series with three fresh cells. Each string shall then be discharged at 50 milliamperes at 70±5ºF for 20 hours.

Batteries: For all capacity tests except the LR1, the batteries shall be discharged at 50 milliamperes constant current to cut-off volts (zero volts for the I test). For the LR1 test, batteries shall be discharged at 20 milliamperes to 10 volts, then at 0.9 watts to 8 volts.

Forced Discharge: After the batteries have been discharged to zero volts on the I test, batteries shall be force discharged at 50 milliamperes for a minimum of 5 minutes.

Overload: Batteries shall be discharged at 100 milliamperes.

Abuse test predischarge: Designated samples shall be discharged at 50 milliamperes for 10 hours.

Abuse test, pulse discharge: Batteries shall be discharged at 90 milliamperes for 1 minute followed by 40 milliamperes for 4 minutes, cycled continuously to cut-off voltage.

Closed circuit voltage (battery and cell strings): Load resistance of 130 ohms shall be used. Voltage shall be above 10.6 volts within 5 seconds.

Cell closed circuit voltage: Load resistance of 32.5 ohms shall be used. Voltage shall be above 2.65 volts in 5 seconds or less.

Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army – CR

Preparing activity:
Army - CR

(Project 6135-0417-13)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:12Z
Check the source to verify that this is the current version before use.