NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Air Force
NOTE: This drawing was approved by Joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all antecedent standard drawings for the same product and shall become effective for the procurement of aeronautical supplies, or for use in new designs, not later than six months after the latest date of approval shown.

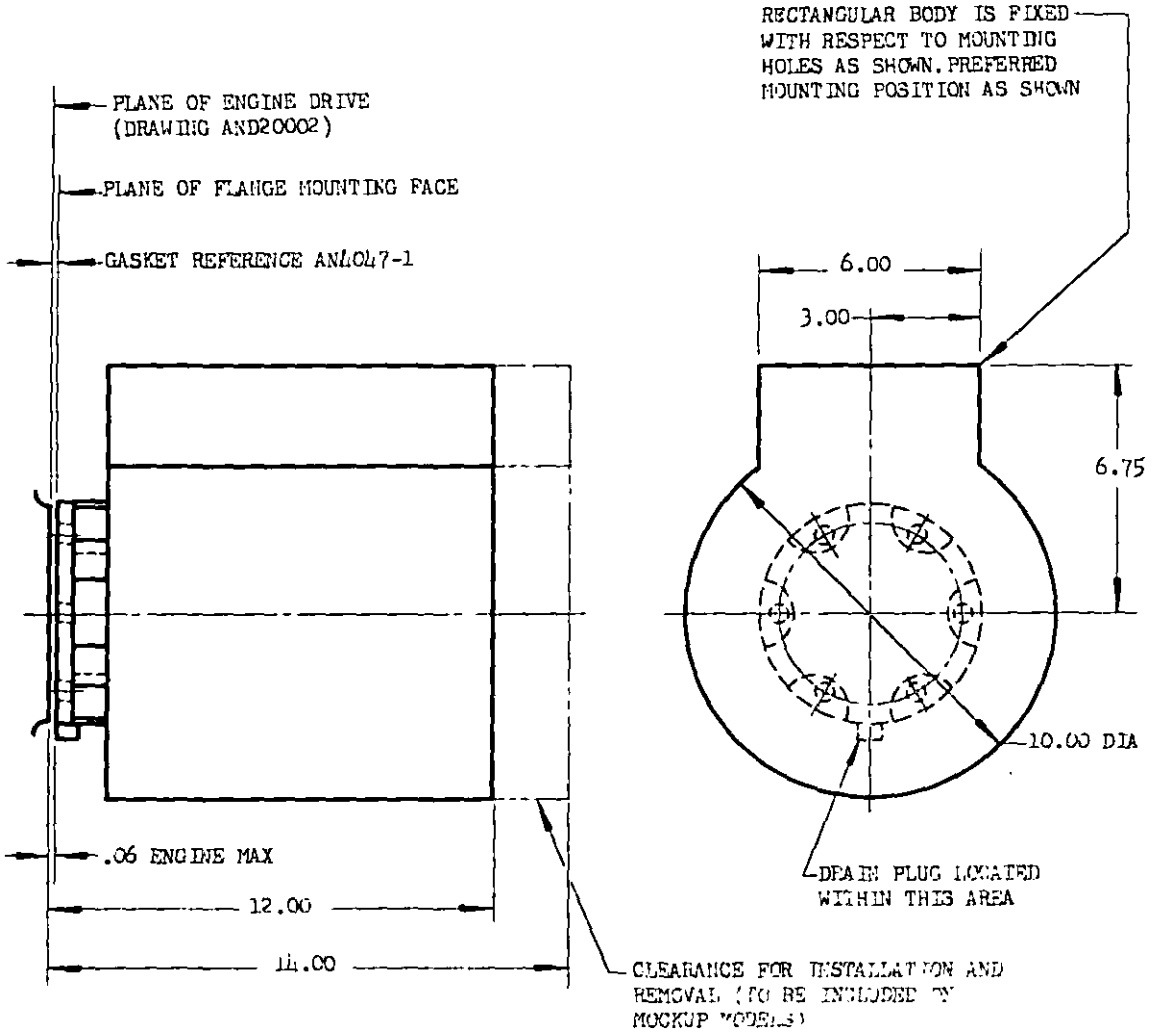

ALLOW CLEARANCE AT INLET, OUTLET AND LOWEST MOUNTING FLANGE DRAIN PORTS FOR "AN" FITTINGS AND "AND" ATTACHING LINES.

PROVIDE ACCESSORY CLEARANCE AROUND ACCESSORY MOUNTING FLANGE IN ACCORDANCE WITH DRAWING AND10262.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE MINIMUM CLEARANCE ON ENGINE.

(1) ENTIRE DRAWING REVISED.

APPROVED 24 Oct 46 REVISED (1) 5 Aug 49

AIR FORCE-NAVY AERONAUTICAL DESIGN STANDARD

(1) INSTALLATION CLEARANCE - TYPE XII-K (FLUID POWER PUMP)

AND10338

NOT A PART NUMBER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:29Z
Check the source to verify that this is the current version before use.