INCH-POUND

MIL-DTL-15665/16J
9 January 2014
SUPERSEDING
MIL-DTL-15665/16H
30 December 2007

DETAIL SPECIFICATION SHEET

INSIGNIA, BRANCH OF SERVICE, ENLISTED, SIGNAL CORPS, U. S. ARMY

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-15665.

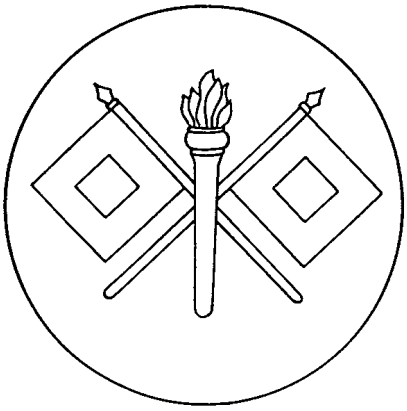

MATERIAL: Red Brass 85/15 (UNS Alloy No. C-230)

FINISH:
DISC: Nickel Plated, 22K Gold Plated, Mirror-like Polished, and shall match The Institute of Heraldry (TIOH) Metal Finish Chip No. 9.
DEVICE: Nickel Plated, 22K Gold Plated, Polished Highlights.

DIMENSIONS:
DISC:
DIAMETER: 1 inch + 1/64 inch - 0
THICKNESS: 0.040 inch ± 0.005 inch
DEVICE:
HEIGHT (Overall): 5/8 inch (REF)
WIDTH (Overall): 7/8 inch (REF)
THICKNESS (At thickest point): 0.065 inch ± 0.005 inch

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:32Z
Check the source to verify that this is the current version before use.

NOTES:
1. The term (REF) refers to measurements taken from the Government furnished hub or die.

2. At the option of the manufacturer for commercial sale only, insignia may be finished as follows:
DISC: 24 Karat Gold Plated, Mirror-like Polished, and shall match TIOH Metal Finish Chip Number 6.
DEVICE: 24 Karat Gold Plated, Polished Highlights.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2014-050)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:32Z
Check the source to verify that this is the current version before use.