NOT MEASUREMENT SENSITIVE


MIL-I-15665/20D
30 July 1992
SUPERSEDING
MIL-I-15665/20C
15 March 1988

MILITARY SPECIFICATION SHEET

INSIGNIA, HAT, EP; FEMALE, ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-I-15665.

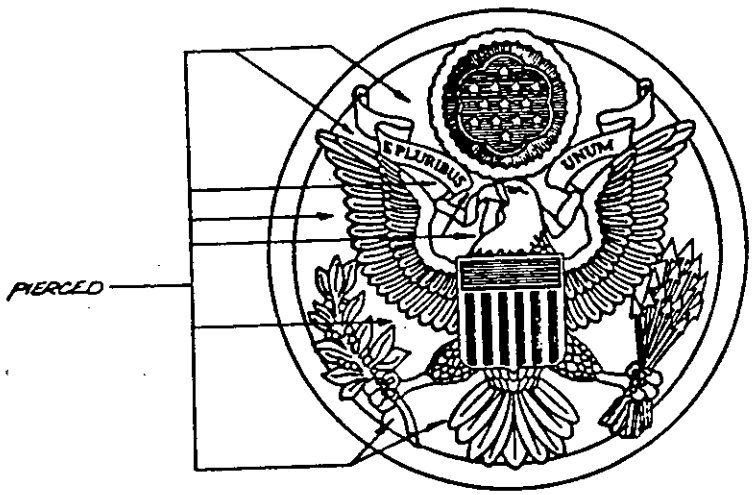

MATERIAL: Red Brass, Zinc Aluminum

FINISH: Gold Plated, Matte Finish with Polished Highlights

DIMENSIONS:
DIAMETER: 1-3/4 inches (4.45 cm) (REF)
THICKNESS: 0.070 inch ± 0.005 inch (0.178 cm ± 0.012 cm)

FSC 8455

AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:33Z
Check the source to verify that this is the current version before use.

NOTE:

1. The term (REF) refers to measurements taken from the Government furnished hub or die.

2. A mock forcer may be used to bring up the design of the shield and glory only.

3. Pierced areas shall be as indicated. Only the left hand piercing is shown.

4. Insignia shall be spherically dapped 3/16 inch + 1/32 inch - 0 (0.48 cm + 0.08 cm - 0) when measured from the back of the rim to the high point on the obverse.

5. The attaching device shall be prong and clutch type. The prongs shall be located at the intersection of the vertical center line of the insignia and 1/4 inch ± 1/16 inch (0.64 cm ± 0.16 cm) in from the rim edge.

6. In addition to the finish specified, the zinc aluminum shall be copper plated to begin the finishing process.

7. Insignia may be manufactured using 22 karat gold plate with nickel underplating for commercial sale only.

Custodian:
Army - IH

Review activities:
DLA - CT

Preparing activities:
Army - IH

(Project No. 8455-0680)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:33Z
Check the source to verify that this is the current version before use.