INCH-POUND

MS27638D
29 September 2000
SUPERSEDING
MS27638C
14 September 1993

DETAIL SPECIFICATION SHEET

MANDREL SLEEVE SETTING

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-83296.

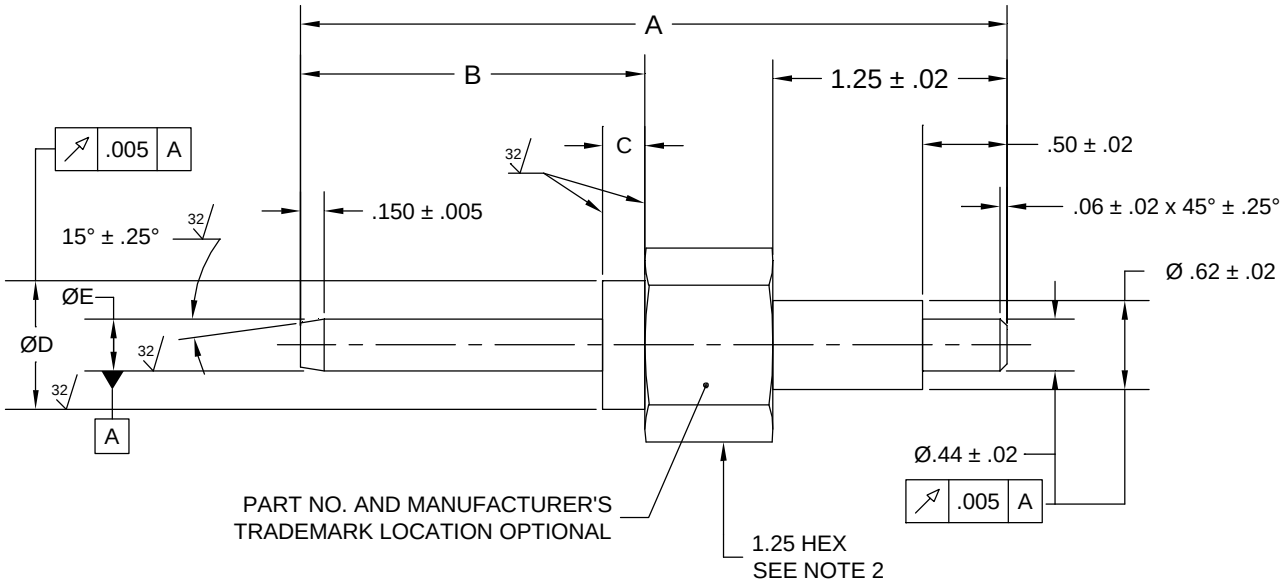

FIGURE 1. Mandrel sleeve setting.

AMSC N/A FSC 4730

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:46Z
Check the source to verify that this is the current version before use.

TABLE I. Mandrel sleeve dimensions.

Part number	A ±.02	B ±.02	C ±.005	D ±.005	E min	E max
MS27638-4C	3.37	1.12	.325	.475	.225	.230
MS27638-6C	3.75	1.50	.300	.605	.322	.334
MS27638-8C	4.25	2.00	.355	.705	.440	.445
MS27638-10C	4.25	2.00	.295	.870	.575	.580

REQUIREMENTS:

1. Mandrel sleeves shall be in accordance with figure 1 and table I.

2. Material shall be S2 steel (UNS T41902) as specified in ASTM A681. Hardness shall be Rockwell C 58 to 60.

3. Finish shall be black oxide as specified in SAE AMS2485.

4. Radius or break all corners to .005 +.005/-.000, unless otherwise specified.

5. All burrs and slivers shall be removed.

6. Surface roughness, in accordance with ASME B46.1, shall not exceed 125 µin R_a, unless otherwise specified.

7. All tolerances shall be ±.005, unless otherwise specified.

8. The part number and manufacturer's part number shall be marked in accordance with MIL-DTL-83296.

NOTES:

1. Dimensions are in inches, unless otherwise specified.

2. For hex, use commercial stock size tolerance as specified in SAE AMS2241M.

3. This part is for use with MIL-DTL-83298 hose.

4. This specification sheet takes precedence over documents referenced herein.

5. Referenced documents shall be of the issue listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation.

6. Dimensioning and tolerancing are in accordance with ASME Y14.5M-1994.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:46Z
Check the source to verify that this is the current version before use.

7. Part or Identifying Number (PIN):

Example of a PIN: MS27638-4C.

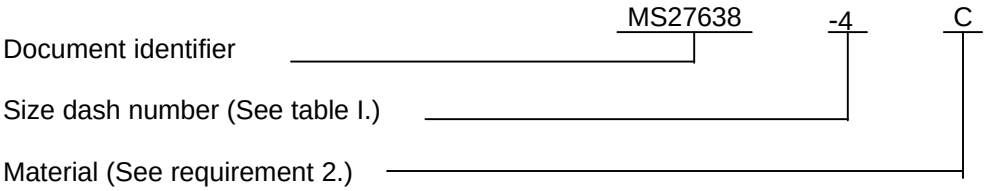

Custodians:
Air Force - 99
Army - AV
Navy - AS
DLA - CC

Review activities:
Air Force - 82
Navy -MC, SA

Preparing activity:
DLA - CC

(Project 4730-1040-042)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:46Z
Check the source to verify that this is the current version before use.