The documentation and process conversion measures necessary to comply with this revision shall be completed by 31 November 1998

INCH-POUND

MIL-PRF-19500/392D
31 August 1998
SUPERSEDING
MIL-S-19500/392C
13 August 1993

PERFORMANCE SPECIFICATION SHEET

SEMICONDUCTOR DEVICE, TRANSISTOR, PNP, SILICON, SWITCHING
TYPE 2N3485A, 2N3486A, JAN, JANTX AND JANTXV

This Specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the performance requirements for PNP silicon switching transistors. Three levels of product assurance are provided for each device type as specified in MIL-PRF-19500.

1.2 Physical dimensions. See figure 1 (similar to T0-46).

1.3 Maximum ratings.

P_T		V_{CBO}	V_{CEO}	V_{EBO}	I_C	T_{op} and T_{ST}	$R_{\theta JC}$	$R_{\theta JA}$
T_A =+25°C1/	T_C = +25°C2/							
W 0.4	W 2.0	V dc 60	V dc 60	V dc 5	mA dc 600	°C -55 TO +200	°C /W 87	°C /mW 0.439

1/ Derate linearly at 2.28 mW/°C above T_A = +25°C.
2/ Derate linearly at 11.43 mW/°C above T_C = +25°C.

1.4 Primary electrical characteristics.

	h_{FE2} V_{CE} = 10 V dc I_C = 1.0 mA dc		h_{FE4} V_{CE} = 10 V dc I_C = 150 mA dc 1/		$\|h_{fe}\|$ V_{CE} = 20 V dc I_C = 50 mA dc f = 100 MHz	C_{obo} 100 kHz ≤ f ≤ 1 Mhz V_{CB} = 10 V dc I_E = 0	Switching			
							t_{on}	t_{off}		$t_{on} + t_{off}$ (nonsaturated)
	2N3485A	2N3486A	2N3485A	2N3486A		pF	ns	2N3485A	2N3486A	ns
Min	40	100	40	100	2.0					
Max			120	300	10	8	45	175	200	18

1/ Pulsed (see 4.5.1).


Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, Defense Supply Center Columbus, ATTN: DSCC-VAT, 3990 East Broad St., Columbus, OH 43216-5000, by using the addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A
FSC 5961

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T16:22Z
Check the source to verify that this is the current version before use.

Symbol	Dimensions				Notes
	Inches		Millimeters		
	Min.	Max.	Min.	Max.	
CD	.178	.195	4.52	4.95	
CH	.065	.085	1.65	2.16	
HD	.209	.230	5.31	5.84	
LC	.100 TP		2.54 TP		6
LD		.021		.53	7
LL	.500	.750	12.70	19.05	7
LU	.016	.019	.41	.48	7
L1		.050		1.27	7
L2	.250		6.35		7
P	.100		2.54		
Q		.040		1.02	7
r		.010		.25	10
TL	.028	.048	.71	1.22	3
TW	.036	.046	.91	1.17	
α	45° TP		45° TP		6

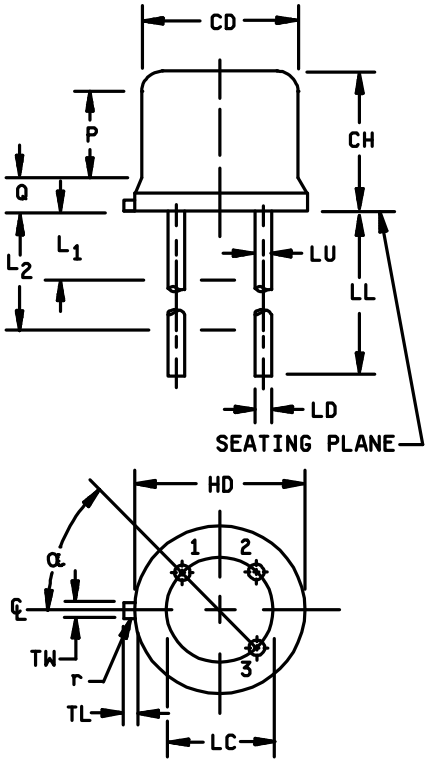

NOTES:
1. Dimension are in inches.
2. Metric equivalents are given for general information only.
3. Beyond r (radius) maximum, TL shall be held for a minimum length of .011 (0.28 mm).
4. Dimension TL measured from maximum HD.
5. Body contour optional within zone defined by HD, CD, and Q.
6. Leads at gauge plane .054 +.001 -.000 inch (1.37 +0.03 -0.00 mm) below seating plane shall be within .008 inch (0.041 mm) radius of true position (TP) at maximum material condition (MMC) relative to tab at MMC. The device may be measured by direct methods.
7. Dimension LU applies between L_1 and L_2. Dimension LD applies between L_2 and LL minimum. Diameter is uncontrolled in L_1 and beyond LL minimum.
8. All three leads.
9. The collector shall be internally connected to the case.
10. Dimension r (radius) applies to both inside corners of tab.
11. In accordance with ANSI Y14.5M, diameters are equivalent to Nx symbology.
12. Lead 1 = emitter, lead 2 = base, lead 3 = collector.
13. For L suffix devices, dimension LL = 1.5 inches (38.10 mm) min. and 1.75 inches (44.45 mm) max.

FIGURE 1. Physical dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T16:22Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATION

DEPARTMENT OF DEFENSE

MIL-PRF-19500 - Semiconductor Devices, General Specification for.

STANDARD

MILITARY

MIL-STD-750 - Test Methods for Semiconductor Devices.

(Unless otherwise indicated, copies of the above specifications, standards, and handbooks are available from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein (except for related associated specifications or specification sheets), the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Qualification. Devices furnished under this specification shall be products that are authorized by the qualifying activity for listing on the applicable qualified products list before contract award (see 4.2 and 6.3).

3.2 Associated specification. The individual item requirements shall be in accordance with MIL-PRF-19500, and as specified herein.

3.3 Interface requirements and physical dimensions. The Interface requirements and physical dimensions shall be as specified in MIL-PRF-19500, and figure 1 (T0-46) herein.

3.4 Abbreviations, symbols, and definitions. Abbreviations, symbols, and definitions used herein shall be as specified in MIL-PRF-19500.

3.4.1 Lead finish. Lead finish shall be solderable in accordance with MIL-PRF-19500. Where a choice of lead finish is desired, it shall be specified in the acquisition document (see 6.2).

3.5 Marking. Marking shall be in accordance with MIL-PRF-19500.

3.6 Electrical performance characteristics. Unless otherwise specified herein, the electrical performance characteristics are as specified in paragraph 1.3, 1.4, and table I herein.

3.7 Electrical test requirements. The electrical test requirements shall be the subgroups specified in paragraphs 4.4.2 and 4.4.3 herein.

4. VERIFICATION

4.1 Classification of Inspections. The inspection requirements specified herein are classified as follows:

a. Qualification inspection (see 4.2).

b. Screening (see 4.3)

c. Conformance inspection (see 4.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T16:22Z
Check the source to verify that this is the current version before use.

4.2 Qualification inspection. Qualification inspection shall be in accordance with MIL-PRF-19500 and herein.

4.3 Screening. Screening shall be in accordance with MIL-PRF-19500 (table IV), and as specified herein. The following measurements shall be made in accordance with table I herein. Devices that exceed the limits of table I herein shall not be acceptable.

Screen (see table IV of MIL-PRF-19500)	Measurements
	JANTX & JANTXV levels
3c	Thermal impedance (see 4.3.2)
9	Not applicable
10	24 hours minimum.
11	I_{CBO2}, h_{FE4}
12	See 4.3.1, t = 80 hours minimum
13	Subgroup 2 of table I herein; ΔI_{CBO2} = 100 percent of initial value or 5 nA dc whichever is greater. Δh_{FE4} = ± 15 percent.

4.3.1 Power burn-in conditions. Power burn-in conditions are as follows: T_A = Room ambient as defined in the general requirements of MIL-STD-750, section 4.5:

V_{CB} = 10 - 30 V dc; P_T = 400 mW;

NOTE: No heat sink or forced air cooling on the devices shall be permitted.

4.3.2 Thermal impedance ($Z_{\theta JX}$ measurements). The $Z_{\theta JX}$ measurements shall be performed in accordance with MIL-STD-750, Method 3131.

a. I_M measurement current ..... 5 mA.

b. I_H forward heating current..... 200 mA (min).

c. t_H heating time ..... 25 - 30 ms.

d. t_{md} measurement delay time..... 60 µs max.

e. V_{CE} collector-emitter voltage..... 10 V dc minimum

The maximum limit for $Z_{\theta JX}$ under these test conditions are $Z_{\theta JX}$ (max) = 87°C/W.

4.4 Conformance inspection. Conformance inspection shall be in accordance with MIL-PRF-19500 and as specified herein.

4.4.1 Group A inspection. Group A inspection shall be conducted in accordance with table V of MIL-PRF-19500 and table I herein.

4.4.2 Group B inspection. Group B inspection shall be conducted in accordance with the conditions specified for subgroup testing in table VIb (JAN, JANTX and JANTXV). See 4.4.2.1 for JAN, JANTX, and JANTXV group B testing. Electrical measurements (end-points) and delta requirements for JAN, JANTX, and JANTXV shall be after each step in 4.4.2.1 and shall be in accordance with group A, subgroup 2 and 4.5.3 herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T16:22Z
Check the source to verify that this is the current version before use.

4.4.2.1 Group B inspection, table VIb (JAN, JANTX, and JANTXV) of MIL-PRF-19500 1/

Step	Method	Condition
1	1039	Steady-state life: Test condition B, 340 hours, V_{CB} = 10 - 30 V dc, T_J = +150°C minimum. No heat sink or forced- air cooling on devices shall be permitted. n = 45, C = 0.
2	1039	The steady-state life test of step 1 shall be extended to 1,000 hours for each die design. Samples shall be selected from a wafer lot every twelve months of wafer production. Group B step 2 shall not be required more than once for any single wafer lot. n = 45, C = 0.
3	1032	High- temperature life (non operating), T_A = +200°C, t = 340 hours, n = 22, C = 0.

1/ Separate samples may be used for each step. In the event of a group B failure, the manufacturer may pull a new sample at double size from either the failed assembly lot or from another assembly lot from the same wafer lot. If the new “assembly lot” option is exercised, the failed assembly lot shall be scrapped.

4.4.2.2 Group B sample selection. Samples selected from group B inspection shall meet all of the following requirements.:

a. For JAN, JANTX and JANTXV samples shall be selected randomly from a minimum of three wafers (or from each wafer in the lot) from each wafer lot.

b. Must be chosen from an inspection lot that has been submitted to and passed group A, subgroup 2, conformance inspection. When the final lead finish is solder or any plating prone to oxidation at high temperature, the samples for life test (group B for JAN, JANTX, and JANTXV) may be pulled prior to the application of final lead finish.

4.4.3 Group C inspection. Group C inspection shall be conducted in accordance with the conditions specified for subgroup testing in table VII of MIL-PRF-19500, and in 4.4.3.1 (JAN, JANTX, and JANTXV) herein for group C testing. Electrical measurements (end points) and delta requirements shall be in accordance with group A, subgroup 2 and 4.5.3 herein.

4.4.3.1 Group C inspection, table VII (JAN, JANTX, and JANTXV) of MIL-PRF-19500.

Subgroup	Method	Condition
C2	2036	Test condition E.
C6		Not applicable.

4.4.3.2 Group C sample selection. Samples for subgroups in group C shall be chosen at random from any inspection lot containing the intended package type and lead finish procured to the same specification which is submitted to and passes group A tests for conformance inspection. Testing of a subgroup using a single device type enclosed in the intended package type shall be considered as complying with the requirements for that subgroup.

4.4.4 Group E inspection. Group E inspection shall be performed for qualification or requalification only. The tests specified in table II herein must be performed to maintain qualification.

4.5 Method of inspection. Methods of inspection shall be as specified in the appropriate tables and as follows:

4.5.1 Pulse measurements. Conditions for pulse measurement shall be as specified in section 4 of MIL-STD-750.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T16:22Z
Check the source to verify that this is the current version before use.

4.5.3 Delta Requirements. Delta requirements shall be as specified below:

Step	Inspection	MIL-STD-750		Symbol	Limit	Unit
		Method	Conditions			
1	Collector-base cutoff current	3036	Bias condition D, V_{CB} = 50 V dc	ΔI_{CB02} 1/	100% of initial value or ± 10 nA dc, whichever is greater.	
2	Forward current transfer ratio	3076	V_{CE} = 10 V dc; I_C = 150 mA dc; pulsed see 4.5.1	Δh_{FE4} 1/	± 25% change from initial reading.	

1/ Devices which exceed the group A limits for this test shall not be accepted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T16:22Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection.

Inspection 1/	MIL-STD-750		Symbol	Limit		Unit
	Method	Conditions		Min	Max	
Subgroup 1 2/						
Visual and mechanical inspection 3/	2071	n = 45 devices, c = 0				
Solderability 3/	2026	n = 15 leads, c = 0				
Resistance to solvents 3/ 4/	1022	n = 15 devices, c = 0				
Temp cycling 3/	1051	Test condition C, 25 cycles. n = 22 devices, c = 0				
Heremetic seal Fine leak Gross leak	1071	n = 22 devices, c = 0				
Electrical measurements		Group A, subgroup 2				
Bond strength 3/	2037	Precondition T_A = + 250°C at t = 24 hours or T_A = + 300°C at t = 2 hours n = 11 wires, c = 0				
Subgroup 2						
Collector to base cutoff current	3036	Bias condition D; V_{CB} = 60 V dc	I_{CBO1}		10	µA dc
Emitter to base cutoff current	3061	Bias condition D; V_{EB} = 5 V dc	I_{EBO1}		10	µA dc
Breakdown voltage, collector to emitter	3011	Bias condition. D; I_C = 10 mA dc; Pulsed (see 4.5.1)	$V_{(BR)CEO}$	60		V dc
Collector to base cutoff current	3036	Bias condition D; V_{CB} = 50 V dc	I_{CBO2}		10	nA dc
Emitter to base cutoff current	3061	Bias condition D; V_{EB} = 3.5 V dc	I_{EBO2}		50	nA dc
Forward-current transfer ratio	3076	V_{CE} = 10 V dc; I_C = 0.1 mA dc	h_{FE1}			
2N3485A 2N3486A				40 75		
Forward-current transfer ratio	3076	V_{CE} = 10 V dc; I_C = 1.0 mA dc	h_{FE2}			
2N3485A 2N3486A				40 100		

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T16:22Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection.

Inspection 1/	MIL-STD-750		Symbol	Limit		Unit
	Method	Conditions		Min	Max	
Subgroup 2 - Continued.						
Forward-current transfer ratio	3076	V_{CE} = 10 V dc; I_C = 10 mA dc	h_{FE3}			
2N3485A 2N3486A				40 100		
Forward-current transfer ratio	3076	V_{CE} = 10 V dc; I_C = 150 mA dc Pulsed (see 4.5.1)	h_{FE4}			
2N3485A 2N3486A				40 100	120 300	
Forward-current transfer ratio	3076	V_{CE} = 10 V dc; I_C = 500 mA dc Pulsed (see 4.5.1)	h_{FE5}			
2N3485A 2N3486A				40 50		
Saturation voltage and resistance	3071	I_C = 150 mA dc; I_B = 15 mA dc; Pulsed (see 4.5.1)	$V_{CE(SAT)1}$		0.4	V dc
Saturation voltage and resistance	3071	I_C = 500 mA dc; I_B = 50 mA dc; Pulsed (see 4.5.1)	$V_{CE(SAT)2}$		1.6	V dc
Base-emitter voltage (saturated)	3066	Test condition A; I_C = 150 mA dc; I_B = 15 mA dc; Pulsed (see 4.5.1)	$V_{BE(SAT)1}$		1.3	V dc
Base-emitter voltage (saturated)	3066	Test condition A; I_C = 500 mA dc; I_B = 50 mA dc; Pulsed (see 4.5.1)	$V_{BE(SAT)2}$		2.6	V dc
Subgroup 3						
High - temperature operation		T_A = +150°C				
Collector - base cutoff current		Bias condition D; V_{CB} = 50 V dc	I_{CBO3}		10	µAdc
Low - temperature operation		T_A = -55°C				
Forward-current transfer ratio	3076	V_{CE} = 10 V dc; I_C = 1.0 mA dc	h_{FE6}			
2N3485A 2N3486A				20 40		

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T16:22Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection.

Inspection 1/	MIL-STD-750		Symbol	Limit		Unit
	Method	Conditions		Min	Max	
Subgroup 4						
Small signal short circuit forward current transfer ratio 2N3485A 2N3486A	3206	V_{CE} = 10 V dc; I_C = 1 mA dc; f = 1 kHz	h_{fe}	 40 100		
Magnitude of small signal short-circuit forward-current transfer ratio	3306	V_{CE} = 20 V dc; I_C = 50 mA dc; f = 100 MHz	$\lvert h_{fe} \rvert$	2.0	10	
Open circuit output capacitance	3236	V_{CB} = 10 V dc; I_E = 0; 100 kHz ≤ f ≤ 1 MHz	C_{obo}		8	pF
Input capacitance (output open-circuited)	3240	V_{EB} = 2.0 V dc; I_C = 0; 100 kHz ≤ f ≤ 1 MHz	C_{ibo}		30	pF
Turn-on time		(See figure 2)	t_{on}		45	ns
Turn-off time 2N3485A 2N3486A		(See figure 3)	t_{off}		 175 200	ns
Pulse response (nonsaturated)		(See figure 4)	$t_{on} + t_{off}$		18	ns
Subgroup 5 and 6						
Not applicable						
Subgroups 7						
Decap internal visual (design verification)	2075	n = 1 device, c = 0				


1/ For sampling plan see MIL-PRF-19500.
2/ For resubmission of failed subgroup A1, double the sample size of the failed test or sequence of tests. A failure in group A, subgroup 1 shall not require retest of the entire subgroup. Only the failed test shall be rerun upon submission.
3/ Separate samples may be used.
4/ Not required for laser marked devices.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T16:22Z
Check the source to verify that this is the current version before use.

TABLE II. Group E inspection (all quality levels) - For qualification only

Inspection	MIL-STD-750		Qualification
	Method	Conditions	
Subgroup 1			12 devices c = 0
Temperature cycling (air to air)	1051	Test condition C, 500 cycles	
Hermetic seal	1071		
Fine leak Gross leak			
Electrical measurements		See group A, subgroup 2 and 4.5.3 herein.	
Subgroup 2			45 devices c = 0
Intermittent life	1037	Intermittent operation life: V_{CB} = 10 V dc , 6,000 cycles, ΔT_A ≥150°C; forced air cooling allowed on cooling cycle only.	
Electrical measurements		See group A, subgroup 2 and 4.5.3 herein.	
Subgroup 3, 4, 5			
Not applicable			


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T16:22Z
Check the source to verify that this is the current version before use.

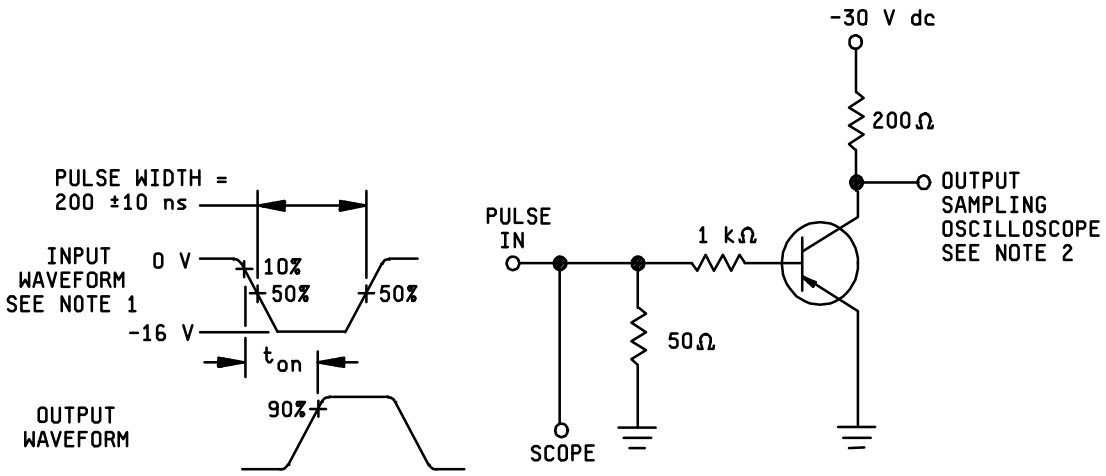

NOTES:

1. The rise time (t_r) and fall time (t_f) of the applied pulse shall be ≤ 2.0 ns; duty cycle ≤ 2 percent; generator source impedance shall be 50 ohms.
2. Output sampling oscilloscope: Z_{in} ≥ 100 kΩ; C_{in} ≤ RPF; rise time ≤ 0.2 ns.

FIGURE 2. Saturated turn-on switching time test circuit.

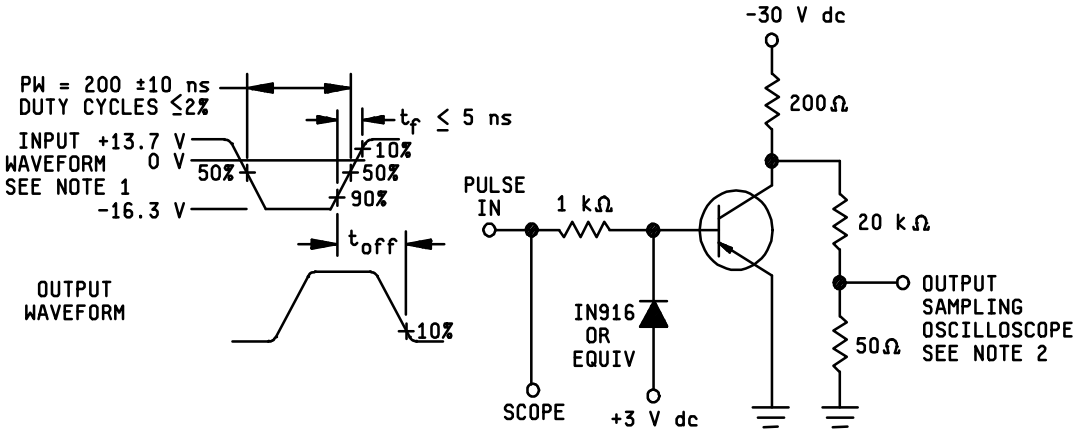


NOTES:

1. The rise time (t_r) and fall time (t_f) of the applied pulse shall be ≤ 2.0 ns; duty cycle ≤ 2 percent; generator source impedance shall be 50 ohms.
2. Output sampling oscilloscope: Z_{in} ≥ 100 kΩ; C_{in} ≤ RPF; rise time ≤ 0.2 ns.

FIGURE 3. Saturated turn-off switching time test circuit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T16:22Z
Check the source to verify that this is the current version before use.

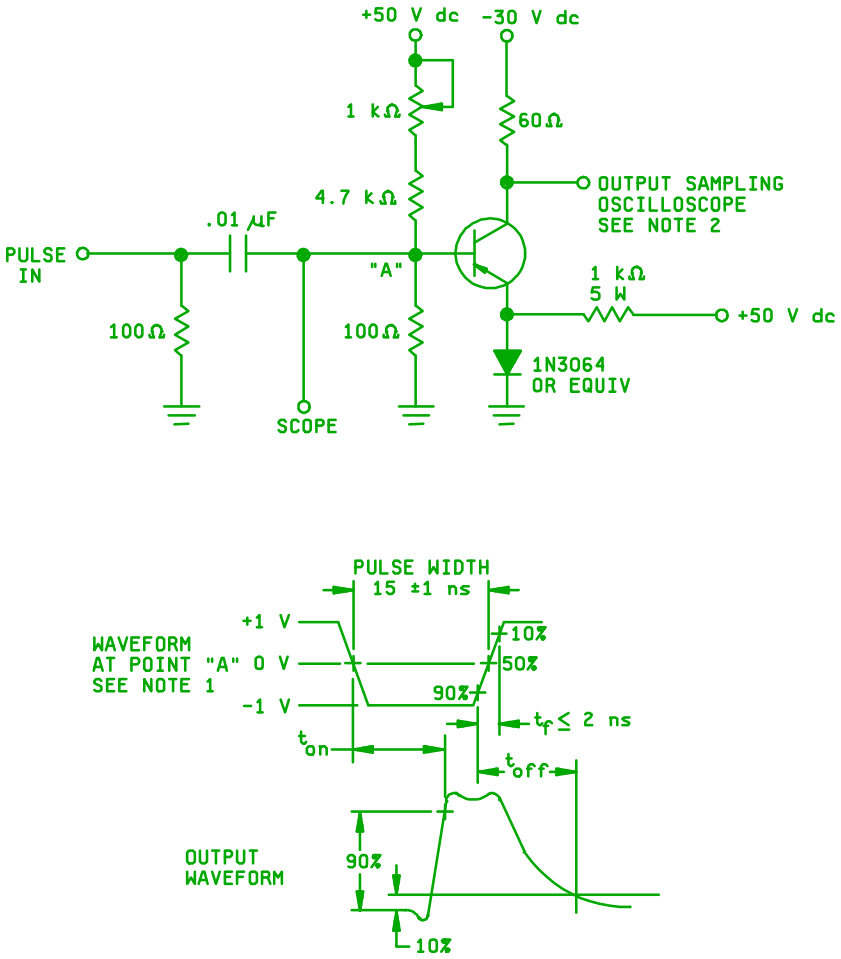

NOTES:

1. The rise time (t_r) and fall time (t_f) of the applied pulse shall be ≤ 2.0 ns; duty cycle ≤ 2 percent; generator source impedance shall be 50 ohms.
2. Output sampling oscilloscope: $Z_{in} \geq 100$ kΩ; $C_{in} \leq$ RPF; rise time ≤ 0.2 ns.

FIGURE 4. Nonsaturated turn-on switching time test circuit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T16:22Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When actual packaging of material is to be performed by DoD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Points' packaging activity within the Military Department or Defense Agency, or within the Military Departments' System Command. Packaging data retrieval is available from the managing Military Departments' or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

5.2 Marking. Unless otherwise specified (see 6.2), marking shall be in accordance with MIL-PRF-19500.

6. NOTES

6.1 Notes. The notes specified in MIL-PRF-19500 are applicable to this specification.

6.2 Acquisition requirements. See MIL-PRF-19500.

6.3 Qualification. With respect to products requiring qualification, awards will be made only for products which are, at the time of award of contract, qualified for inclusion in Qualified Products List QPL-19500 whether or not such products have actually been so listed by that date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or purchase orders for the products covered by this specification. Information pertaining to qualification of products may be obtained from Defense Supply Center Columbus, DSCC-VQE, Columbus, OH 43216.

6.4 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 17

Review activities:
Army - AR, AV, MI, SM
Navy - AS, CG, MC
Air Force - 13, 19, 80, 85
NASA - NA

Preparing activity:
DLA - CC

(Project 5961-2049-01)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T16:22Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.

2. The submitter of this form must complete blocks 4, 5, 6, and 7.

3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	**1. DOCUMENT NUMBER** MIL-PRF-19500/392D	**2. DOCUMENT DATE** 980831

3. DOCUMENT TITLE SEMICONDUCTOR DEVICE, TRANSISTOR, PNP, SILICON, SWITCHING TYPE 2N3485A, 2N3486A, JAN, JANTX AND JANTXV

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER		
a. NAME (Last, First, Middle initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) Commercial DSN FAX EMAIL	7. DATE SUBMITTED

8. PREPARING ACTIVITY				
a. Point of Contact Alan Barone	b. TELEPHONE Commercial 614-692-0510	DSN 850-0510	FAX 614-692-6939	EMAIL alan_barone@dscc.dla.mil
c. ADDRESS Defense Supply Center Columbus ATTN: DSCC-VAT Columbus, OH 43216-5000	**IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:** Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 DSN 289-2340			

DD Form 1426, OCT 89 Previous editions are obsolete 198/290

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T16:22Z
Check the source to verify that this is the current version before use.