
MILITARY SPECIFICATION SHEET

CONNECTOR, FIBER OPTIC, ADAPTER, IN-LINE-CABLE, PANEL MOUNT
(USED WITH MIL-T-29504/4 PIN TERMINUS, SIZE 16)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-83522.

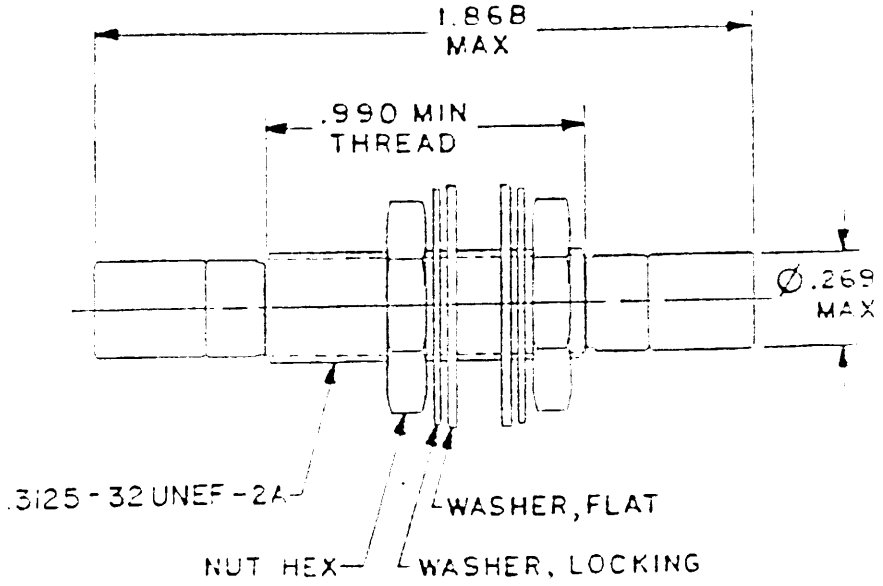


Inches	mm
.0627	1.59
.136	3.45
.161	4.09
.269	6.83
.606	15.39
.991	25.17
1.868	47.45

FIGURE 1. Dimensions and configurations.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:35Z
Check the source to verify that this is the current version before use.

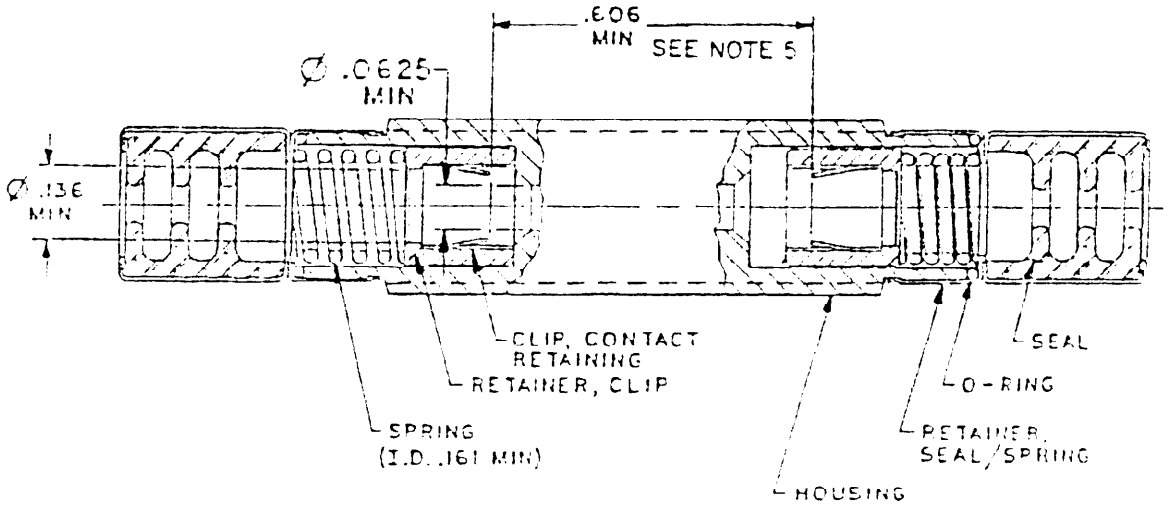

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. See page 3 for parts list.
4. When installing fiber optic contacts, .606 min. dimension must be held to install second contact before full compression of spring on opposite end.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:35Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Metals: The adapter housing and other metal components shall be of corrosion resistant steel per QQ-S-763, class 303 or nickel plated brass per QQ-B-626.

Weight: 6 grams maximum.

Safety wire holes: Not applicable.

Force to engage and disengage:

Longitudinal force: 1 pound maximum.
Torque: Not applicable.

Coupling proof torque: Not applicable.

Coupling mechanism retention force: Not applicable.

Ozone exposure: Not applicable.

Temperature: -65°C to +150°C.

Part or Identifying Number: M83522/11-01

Adapter accessories: Two internal tooth lock washers .410 maximum by .018 inch thick, and two hex nuts .312S by .065 inch thick maximum and two protective dust caps.

Cleaning procedures: Only lint free lens tissue should be used for cleaning and drying of the terminus. It is particularly important when the terminus is dried that no residue of tissue lint remains on the optical surface. In addition, water should only be used as a secondary cleaner if isopropyl alcohol is unavailable. Many contaminants are insoluble in water and would remain after cleaning; therefore, use of water as the cleaning solvent should be avoided whenever isopropyl alcohol is available.

NOTE: This receptacle mates with MIL-T-29504/4 terminus.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:35Z
Check the source to verify that this is the current version before use.

TABLE III. Qualification inspection.

Inspection	Optical tests		Requirement paragraph	Test method paragraph
	Coupling loss 4.7.4	Signal discontinuities 4.7.5		
Group I (All sample units)				
Visual and mechanical inspection			3.4 thru 3.4.2 3.4.5 thru 3.4.1.1 3.6 and 3.7	4.7.1 and 4.7.1.1
Weight			3.4.3	4.7.2
Size			3.4.4	4.7.3
Coupling loss	X 1/		3.5.1.1	4.7.4
Group II (4 sample units)				
Temperature	X		3.5.3.2	4.7.11.2
Humidity	X		3.5.3.6	4.7.11.6
Submersion	X		3.5.3.7	4.7.11.7
Marking			3.6	4.7.1
Group III (4 sample units)				
Tensile loading 2/	X		3.5.2.1.1	4.7.6.1
Flex life	X		3.5.2.1.3	4.7.6.3
Twist	X		3.5.2.1.4	4.7.6.4
Maintenance aging	X		3.5.3.12	4.7.11.12 3/
Temperature cycling	X		3.5.3.3	4.7.11.3
Vibration		X	3.5.3.4	4.7.11.4
Shock		X	3.5.3.5	4.7.11.5
Ozone exposure			3.5.3.10	4.7.11.10
Marking			3.6	4.7.1
Group IV (4 sample units)				
Maintenance aging	X		3.5.3.12	4.7.11.12 3/
Pressure altitude	X		3.5.3.1	4.7.11.1
Temperature cycling	X		3.5.3.3	4.7.11.3
Humidity	X		3.5.3.6	4.7.11.6
Salt fog			3.5.3.8	4.7.11.8
Dust (fine sand)	X		3.5.3.9	4.7.11.9
Fluid immersion	X		3.5.3.11	4.7.11.11
Marking			3.6	4.7.1

1/ X - Indicates that this test applies. See appropriate test paragraph for details.

2/ Load to be 10 Kg.

3/ Test is accordance with method 2002, MIL-STD-1344, 25 cycles.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:35Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Navy - SH
Air Force - 11, 17, 19, 80, 90, 99
DLA - ES
NASA - NA

User activities:
Navy - AS, MC, OS
Air Force - 13, 14

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 6060-0074-3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:35Z
Check the source to verify that this is the current version before use.