MILITARY SPECIFICATION SHEET


CONNECTORS, ELECTRICAL, (CIRCULAR, ENVIRONMENT RESISTING), RECEPTACLE, (WIDE FLANGE MOUNT, BAYONET COUPLING, CRIMP SOCKET CONTACT), (SERIES I, CLASSES A, G, AND R)


Ⓑ

This specification is approved for use by all Departments and Agencies of the Department of Defense.


Ⓑ The complete requirements for procuring the connectors described herein shall consist of this document and the latest issue of Specification MIL-C-26482.

Ⓑ INACTIVE. SUPERSEDED BY MS3472 OF MIL-C-26482.

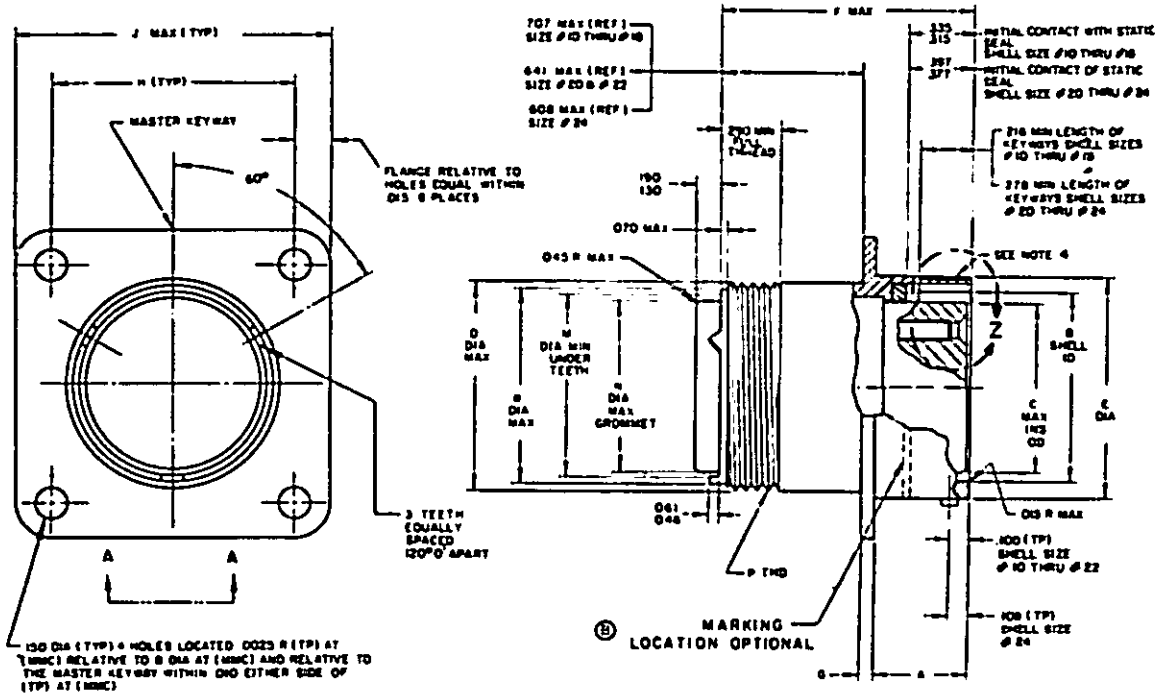



VIEW A-A

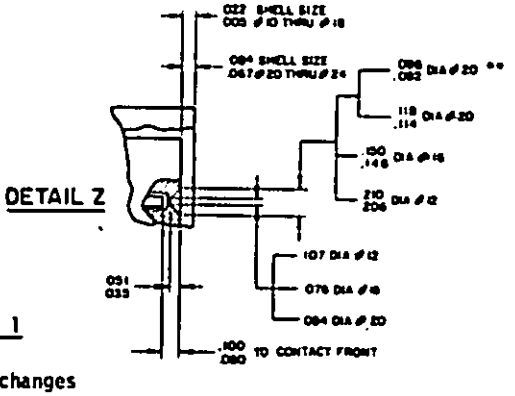

•• SEE TABLE II FOR CONTACT CAVITIES REQUIRING THIS DIMENSION

FIGURE 1

Ⓑ denotes changes

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:16Z
Check the source to verify that this is the current version before use.


TABLE I
CONNECTOR DIMENSIONS

SIZE	A	B	C	D	E	F	G	H	J	K	L	M	N
10	.493 .462	.495 .489	.402	.625	.591 .585	1.215	.078 .046	.812	1.141	.545 .534	.680 .664	.497	.405
12	.493 .462	.612 .606	.516	.750	.751 .745	1.215	.078 .046	.938	1.266	.694 .683	.859 .843	.613	.531
14	.493 .462	.737 .731	.641	.875	.876 .870	1.215	.078 .046	1.031	1.360	.819 .808	.984 .968	.738	.665
16	.493 .462	.862 .856	.766	1.000	1.001 .995	1.215	.078 .046	1.125	1.453	.944 .933	1.108 1.092	.863	.790
18	.493 .462	.967 .961	.855	1.062	1.126 1.120	1.215	.078 .046	1.203	1.532	1.044 1.033	1.233 1.217	.919	.869
20	.587 .556	1.092 1.086	.980	1.187	1.251 1.245	1.275	.110 .078	1.297	1.688	1.169 1.158	1.358 1.342	1.044	.994
22	.587 .556	1.217 1.211	1.105	1.312	1.376 1.370	1.275	.110 .078	1.375	1.766	1.294 1.283	1.483 1.467	1.169	1.119
24	.620 .589	1.342 1.336	1.229	1.437	1.501 1.495	1.275	.110 .078	1.500	1.891	1.419 1.408	1.610 1.594	1.294	1.244

SIZE	P THREAD	R	S	S'	S''	S'''	S''''	T	T'	T''	T'''	T''''	U
10	5/8-24 UNEF-2A	.572	1.492	1.842	2.115	4.769	2.219	1.030	1.380	1.653	4.261	1.711	.880
12	3/4-20 UNEF-2A	.687	1.492	1.842	2.250	4.769	2.349	1.030	1.380	1.788	4.261	1.841	.950
14	7/8-20 UNEF-2A	.812	1.492	2.077	2.340	4.769	2.349	1.030	1.615	1.878	4.261	1.841	1.010
16	1-20 UNEF-2A	.937	1.492	2.077	2.475	4.769	2.579	1.030	1.615	2.013	4.261	2.071	1.070
18	1 1/16-18 UNEF-2A	.992	1.492	2.077	2.574	4.769	2.579	1.030	1.615	2.112	4.261	2.071	1.130
20	1 3/16-18 UNEF-2A	1.117	1.552	2.137	2.767	4.829	2.869	.996	1.581	2.211	4.195	2.235	1.190
22	1 5/16-18 UNEF-2A	1.242	1.552	2.137	2.890	4.829	2.869	.996	1.581	2.334	4.195	2.235	1.260
24	1 7/16-18 UNEF-2A	1.367	1.552	2.137	3.012	4.829	3.109	.963	1.548	2.423	4.162	2.442	1.320

SIZE	U'
10	3.250
12	3.250
14	3.250
16	3.250
18	3.250
20	3.250
22	3.250
24	3.250

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:16Z
Check the source to verify that this is the current version before use.

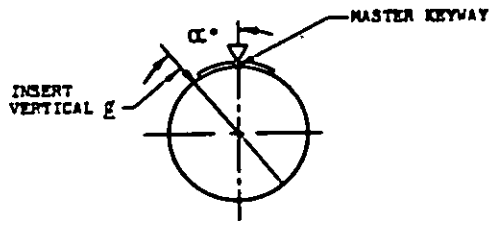

SOCKET INSERT
FACE VIEW

(AS VIEWED FROM MATING END)

INSERT POSITION

▽ INDICATES ℄ OF SHELL

FIGURE 2



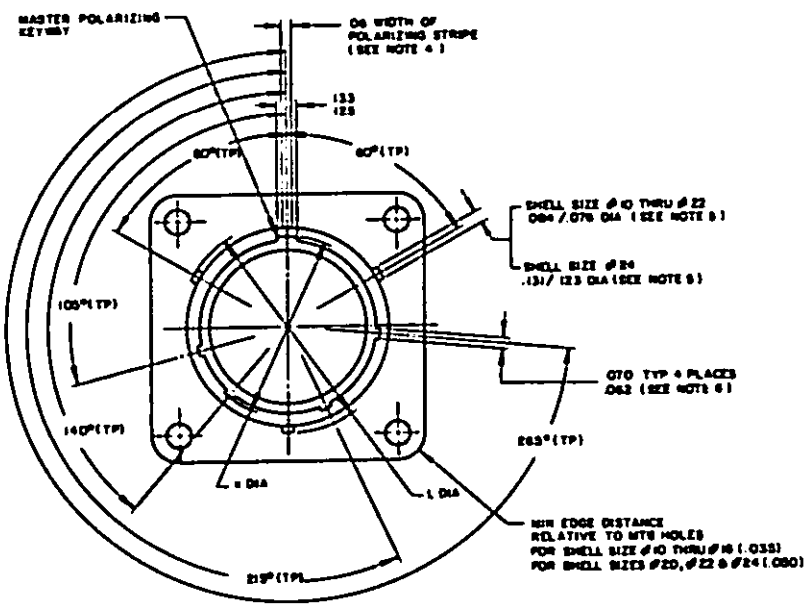


FIGURE 3


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:16Z
Check the source to verify that this is the current version before use.




ASSEMBLED TO STRAIGHT BACKSHELL LESS STRAIN RELIEF

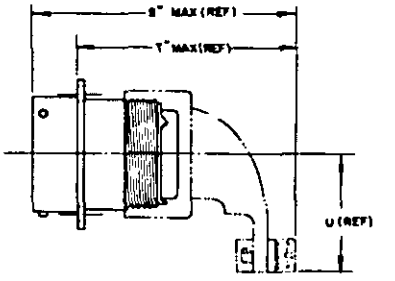


ASSEMBLED TO 90° BACKSHELL WITH STRAIN RELIEF

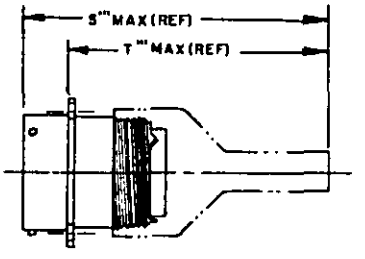


ASSEMBLED TO BACKSHELL WITH STRAIGHT SHRINK STRAIN RELIEF

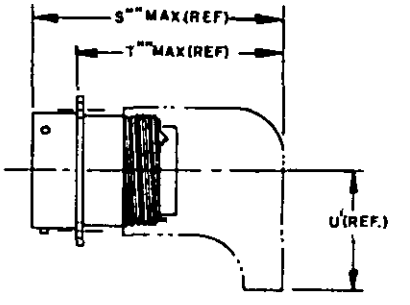

ASSEMBLED TO BACKSHELL WITH 90° SHRINK STRAIN RELIEF



ASSEMBLED TO STRAIGHT BACKSHELL WITH STRAIN RELIEF

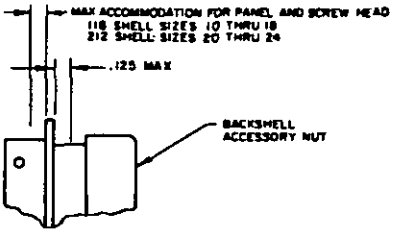

MAX PANEL THICKNESS (TYP)

FIGURE 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:16Z
Check the source to verify that this is the current version before use.

TABLE II. Insert arrangements requiring reduced diameters for lead-in chamfer on outer row of contact cavities as indicated.

Shell	Insert arrangements	Contact cavities
12	10	C and G
14	12	A,B,C,D,E,F,G, and H
14	18	A,C,E,G,J, and L
14	19	B,D,F,H,K, and M
16	26	A,B,C,D,E,F,G,H,J, K,L,M,N,P, and R
18	32	A,B,C,D,E,F,G,H,J, K,L,M,N,P,R,S, and T
22	41	A,B,C,D,E,F,G,H,J, K,L,M,N,P,R,S,T,U, V,W,X, and Y

NOTES:

1. FOR ALTERNATE POLARIZING POSITIONS, THE CONNECTOR INSERT IS ROTATED IN RESPECT TO THE SHELL.
2. IN "NORMAL POSITION" (POSITION "N") THE INSERT VERTICAL CENTER LINE COINCIDES WITH THE CENTER LINE OF THE MASTER KEYWAY OF THE SHELL.
3. IN "ALTERNATE POSITIONS" (POSITIONS "W", "X", "Y", AND "Z") THE SOCKET INSERT IS ROTATED α DEGREES COUNTERCLOCKWISE RELATIVE TO THE $\mathcal{L}$ OF THE MASTER KEYWAY OF SHELL.
4. POLARIZING STRIPE SHALL BE COLOR CODED BLUE.
5. THREE (3) PROJECTIONS LOCATED WITHIN .005 R (TP) AT (MMC) RELATIVE TO "E" DIA (MMC) AND SHELL FRONT, AND WITHIN .010 EITHER SIDE OF (TP) AT (MMC) RELATIVE TO MASTER POLARIZING KEYWAY.
6. FOUR KEYWAYS (MMC) AND INSERT SHALL BE LOCATED WITHIN .0035 EITHER SIDE OF (TP) RELATIVE TO MASTER KEYWAY (MMC) AND SHELL I.D. (MMC).
7. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCE SHALL BE .XX ±.010 AND .XXX ±.005; ANGULAR, $X^{\circ} \pm 1^{\circ}$-0' AND $X^{\circ}X' \pm 30'$.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:16Z
Check the source to verify that this is the current version before use.

TABLE III WIRE DATA

CONTACT SIZE	WIRE SIZE AWG	INSULATION O.D. IN INCHES / WIRE SPECIFICATION 3/			
		MIL-W-22759/4	MIL-W-16878/4	MIL-W-81381/-	
				LIGHT WT -/1	MEDIUM WT -/3
20	24	—	.040/.048 1/	.037/.043	.047/.054
	22	.071/.077	.046/.054	.043/.050	.053/.060
	20	.079/.085 2/	.054/.062	.051/.058	.061/.068
16	20	.079/.085	.054/.062 1/	.051/.058	.061/.068
	18	.092/.098	.064/.074	.060/.067	.071/.079
	16	.099/.107 2/	.073/.087	.066/.074	.079/.087
12	14	.112/.120 1/	.087/.101	.080/.089	.091/.099
	12	.129/.137 2/	.106/.120	.098/.108	.107/.117

1/ WIRE TO BE USED FOR CONNECTOR QUALIFICATION.

2/ WIRE TO BE USED FOR CONTACT QUALIFICATION.

3/ LISTED WIRE SPECIFICATIONS ARE NOT ALL INCLUSIVE. WIRE WITH SMOOTH EXTERIOR SURFACE, WHICH FALLS WITHIN THE SPECIFIED RANGE AND MEETS THE DESIGNERS CRITERIA, MAY BE USED IN APPLICATION.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:16Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration: See figures.

This connector mates with MIL-C-83723/14(USAF).

Ⓑ For insert arrangements see MIL-STD-1669.

Rear hardware must be used per MIL-C-83723/15, /16(USAF), or Air Force Drawing 7045704.


Connector assembly must include a backshell to meet the moisture sealing requirements.

Ⓑ Shell material: Classes A and R - Aluminum alloy per QQ-A-367.
Class G - Corrosion Resistant steel per QQ-S-763.

Wire: See table III.

Ⓑ Connector identification marking shall be in accordance with MIL-C-26482. Example: MS3472L----, M83723/03R----.

Part number example:

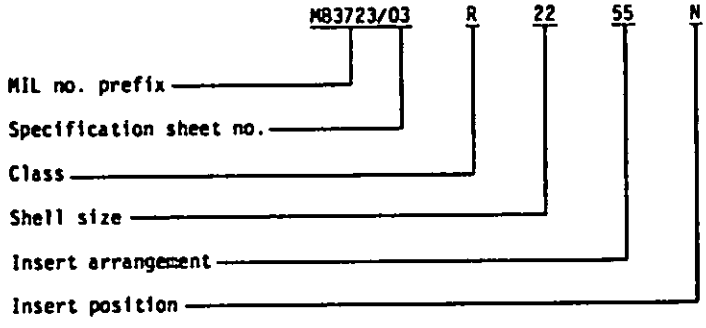

Custodian:
Air Force - 85

Review activities:
Air Force - 11, 17, 70, 71, 80, 82, 84
DSA - ES

Preparing activity:
Air Force - 85

(Project 5935-F964-3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:16Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-C-83723/3B (USAF) Connectors, electrical, (Circular, Environment Resisting

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED

C16061

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:16Z
Check the source to verify that this is the current version before use.

FOLD

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID
DEPARTMENT OF THE AIR FORCE
DoD-318



AFLC/MMGE/Standardization
Wright-Patterson AFB OH 45433

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:16Z
Check the source to verify that this is the current version before use.