
MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, RECTANGULAR, MICROMINIATURE, MOUNTING HARDWARE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the hardware described herein shall consist of this specification and the latest issue of MIL-C-83513.

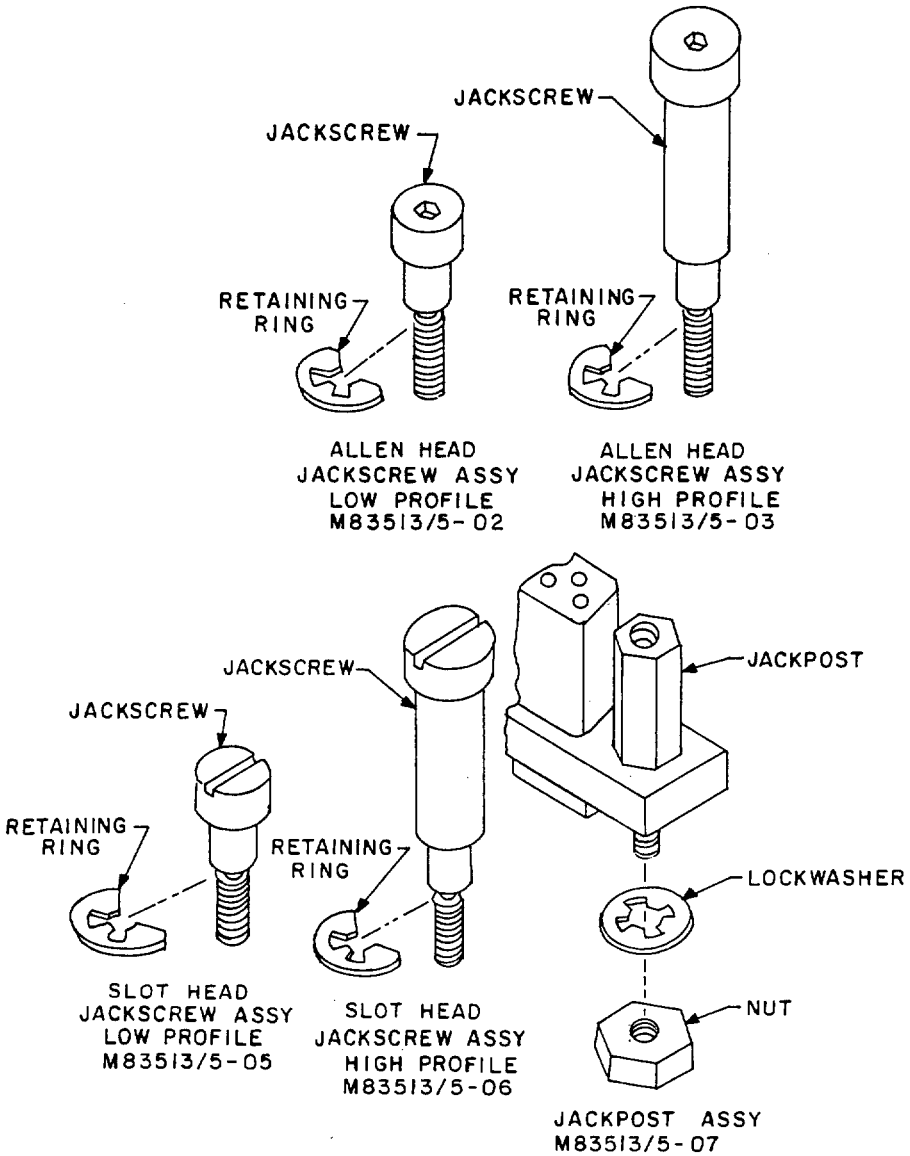


Configurations A and B

FIGURE 1. Mounting hardware types.

Ⓓ denotes change

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:28Z
Check the source to verify that this is the current version before use.

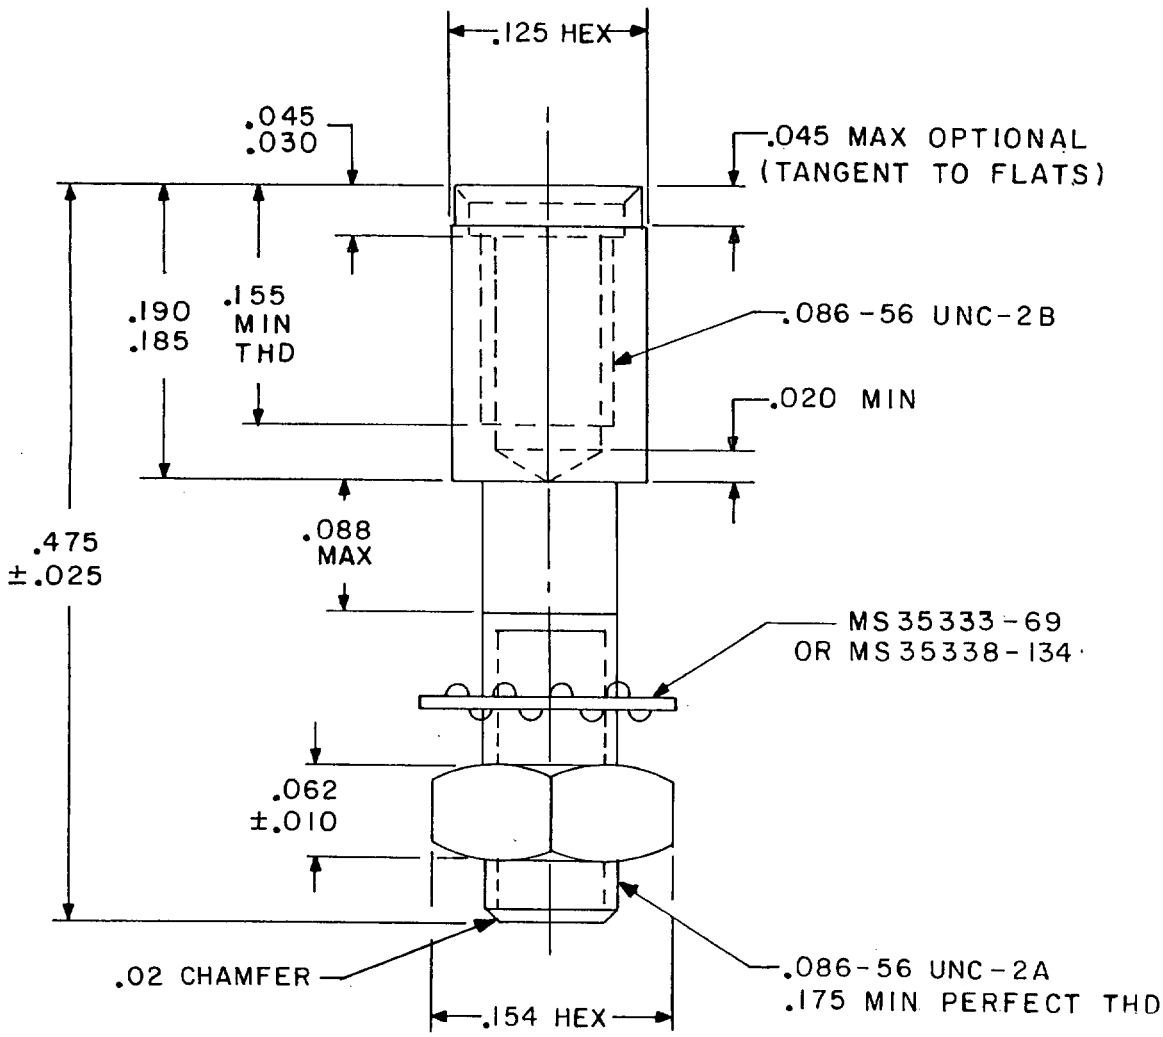


JACKPOST ASSY M83513/5-07

Configuration A	Inches	mm	Inches	mm
	.010	0.25	.088	2.24
	.020	0.51	.125	3.18
	.025	0.64	.154	3.91
	.030	0.76	.155	3.94
	.045	1.14	.175	4.44
	.062	1.57	.185	4.70
	.086	2.18	.190	4.83
			.475	12.06

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

FIGURE 2. Dimensions and configurations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:28Z
Check the source to verify that this is the current version before use.

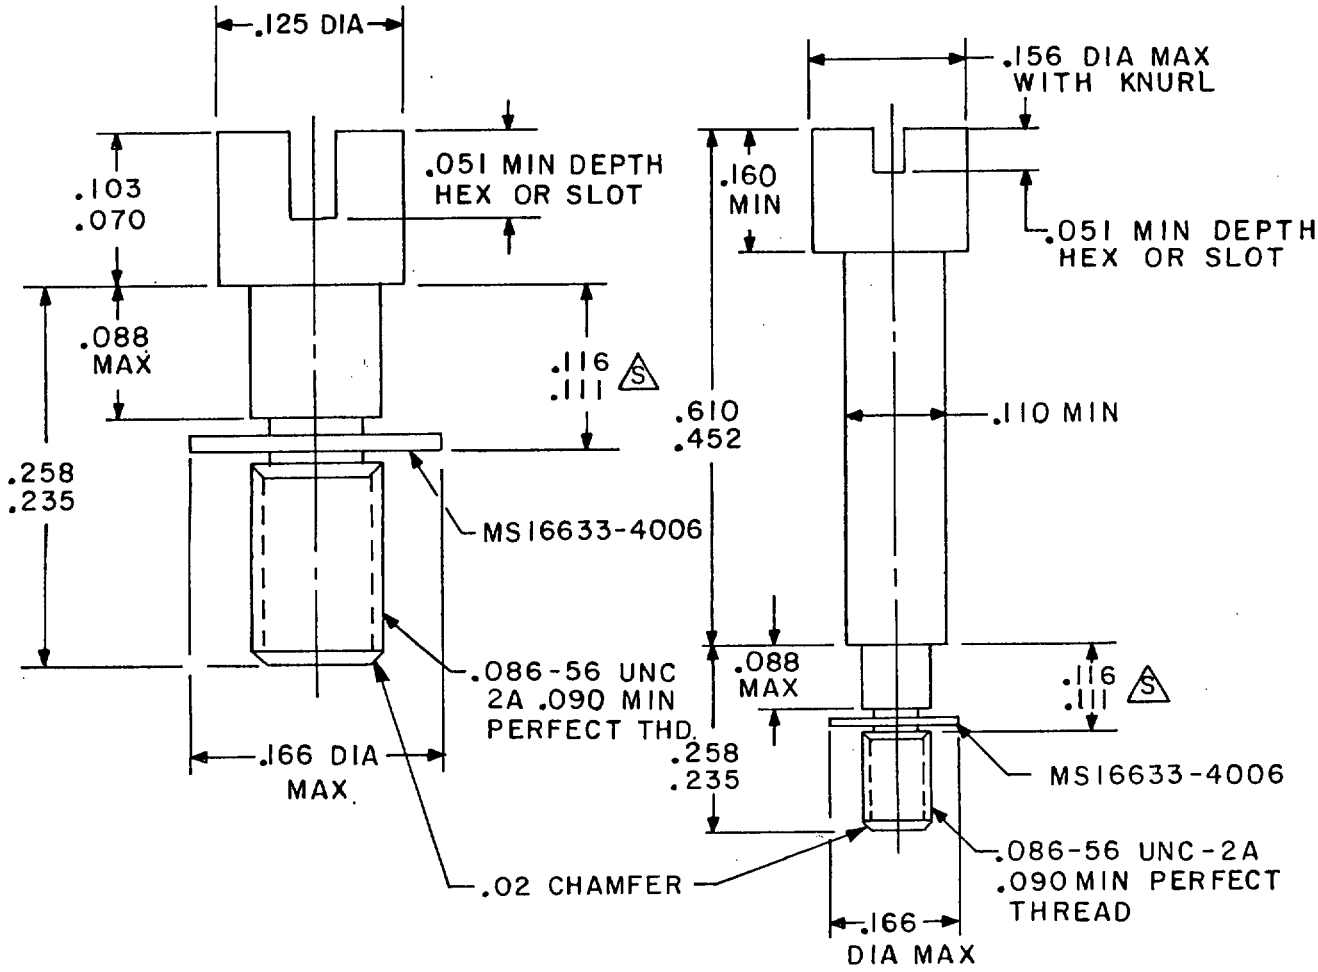

SLOT HEAD JACKSCREW ASSY
LOW PROFILE M83513/5-05

ALLEN HEAD JACKSCREW ASSY
LOW PROFILE, .062 HEX DRIVE
M83513/5-02

SLOT HEAD JACKSCREW ASSY
HIGH PROFILE M83513/5-06

ALLEN HEAD JACKSCREW ASSY
HIGH PROFILE, .062 HEX DRIVE
M83513/5-03

Ⓢ BOTTOM OF E RING SLOT


Configuration B

Inches	mm	Inches	mm
.020	0.51	.111	2.82
.051	1.30	.116	2.95
.062	1.58	.125	3.18
.070	1.78	.156	3.96
.086	2.18	.160	4.06
.088	2.24	.166	4.22
.090	2.29	.235	5.97
.103	2.62	.258	6.55
.110	2.79	.452	11.48
		.610	15.49

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

FIGURE 2. Dimensions and configurations - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:28Z
Check the source to verify that this is the current version before use.

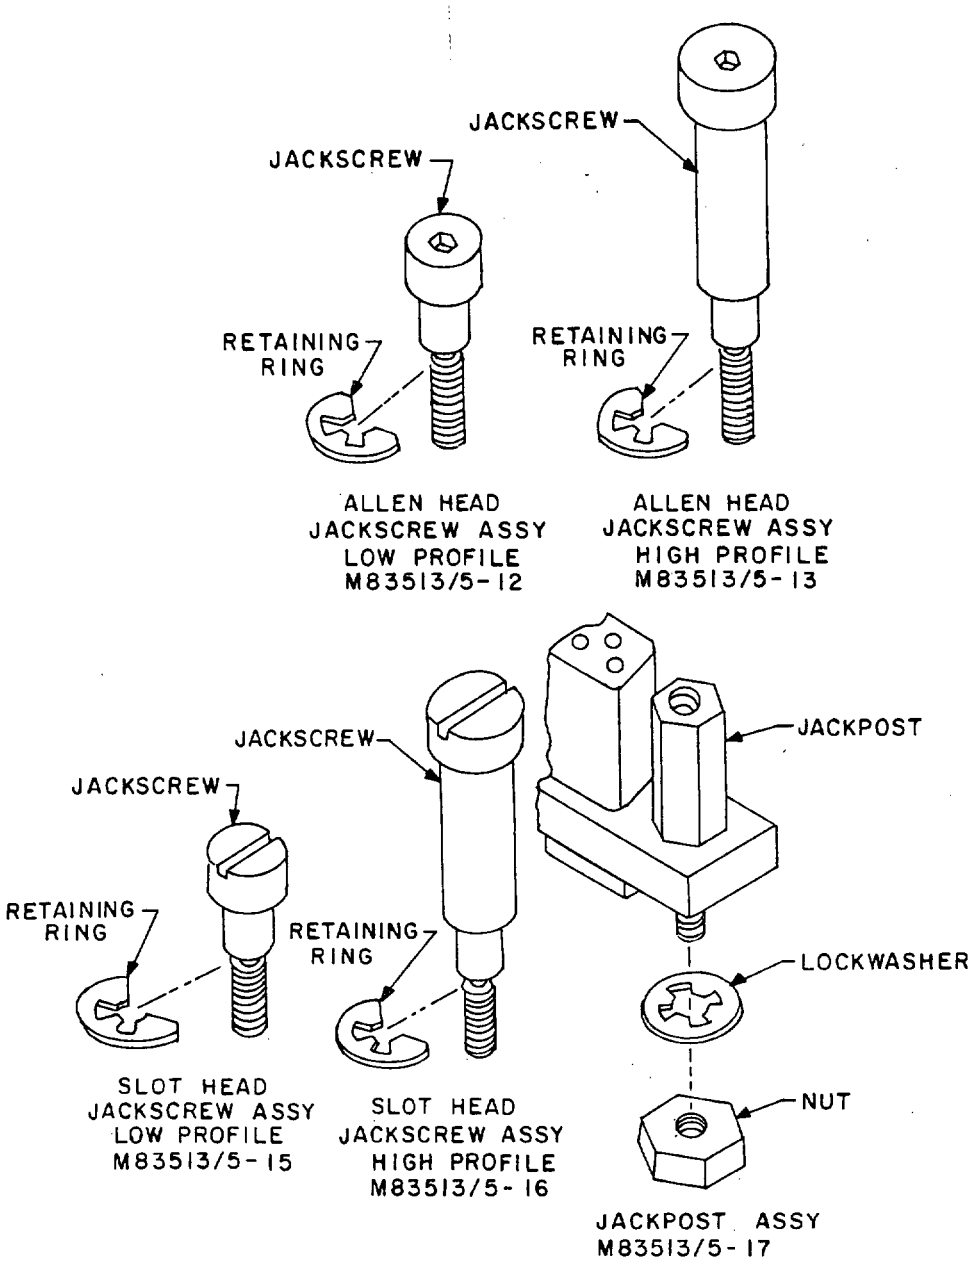

Configuration C

FIGURE 3. Mounting hardware types (100 cavity connectors).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:28Z
Check the source to verify that this is the current version before use.

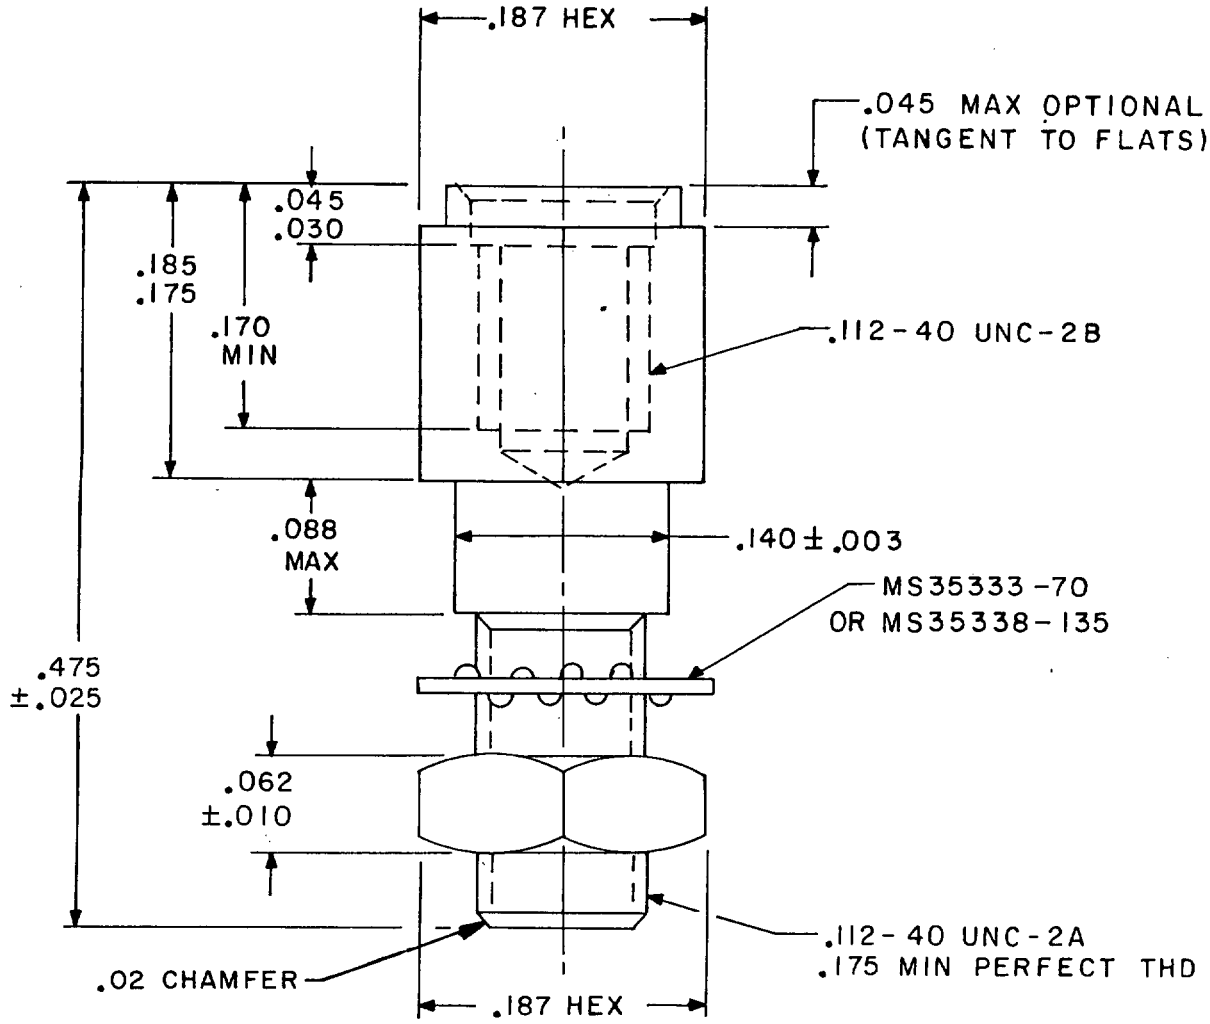

JACKPOST ASSY M83513/5-17


Configuration C

Inches	mm	Inches	mm
.003	0.08	.088	2.24
.010	0.25	.112	2.84
.020	0.51	.140	3.56
.025	0.64	.170	4.32
.030	0.76	.175	4.44
.045	1.14	.185	4.70
.062	1.57	.187	4.75
		.475	12.06

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

FIGURE 4. Dimensions and configuration (100 cavity connector).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:28Z
Check the source to verify that this is the current version before use.

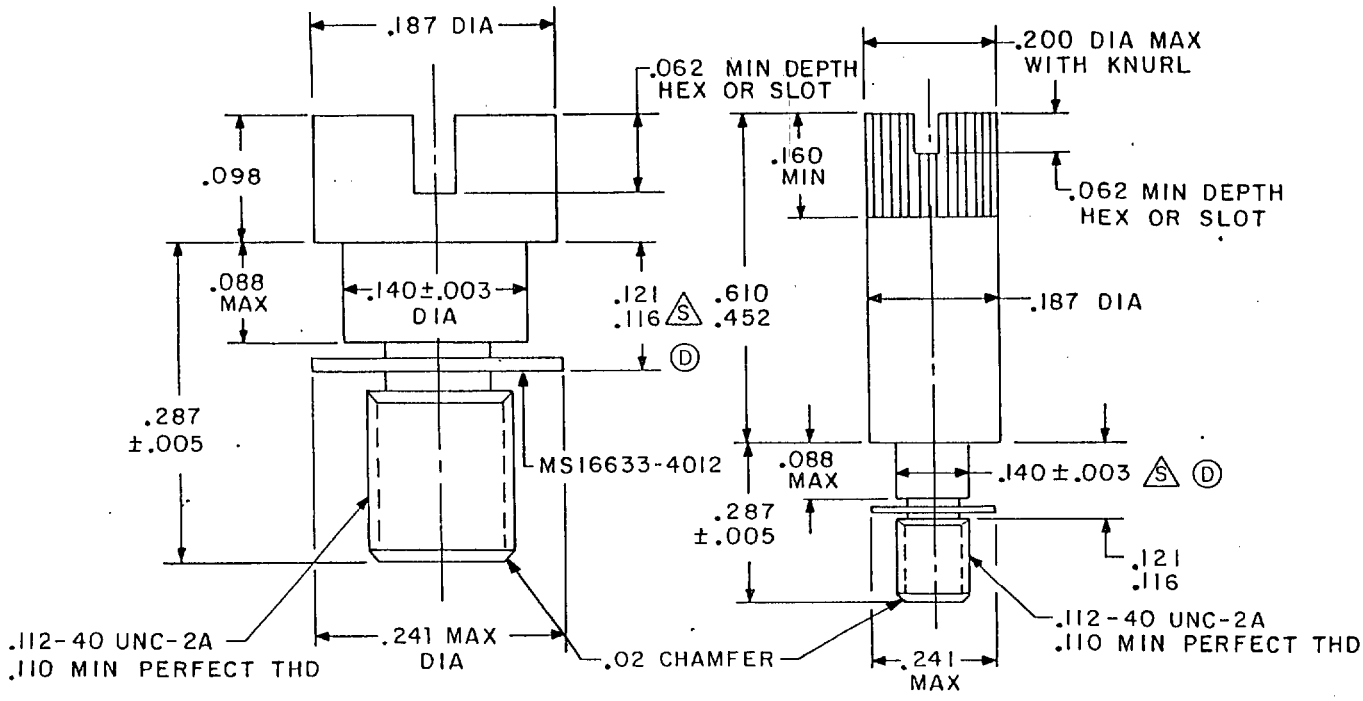

SLOT HEAD JACKSCREW ASSY
LOW PROFILE M83513/5-15

ALLEN HEAD JACKSCREW ASSY
LOW PROFILE, .062 HEX DRIVE
M83513/5-12

SLOT HEAD JACKSCREW ASSY
HIGH PROFILE M83513/5-16

ALLEN HEAD JACKSCREW ASSY
HIGH PROFILE, .062 HEX DRIVE
M83513/5-13

Ⓢ BOTTOM OF E RING SLOT

Configuration C

Inches	mm	Inches	mm
.003	0.08	.121	3.07
.005	0.13	.140	3.56
.020	0.51	.160	4.06
.062	1.57	.187	4.75
.088	2.24	.200	5.08
.098	2.49	.241	6.12
.110	2.79	.287	7.29
.112	2.84	.452	11.48
.116	2.95	.610	15.49

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

FIGURE 4. Dimensions and configuration (100 cavity connector) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:28Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figures 1 through 4.

Material and finish:

Jackscrew: Shall be corrosion resistant steel, nonmagnetic capable of withstanding a tensile strength of 125,000 psi.

Jackpost and nut: Corrosion resistant steel in accordance with ASTM A484 and ASTM A582, passivated in accordance with QQ-P-35.

Clip and washers: Corrosion resistant steel in accordance with QQ-S-766; passivated in accordance with QQ-P-35.

Application:

Mounting hardware not furnished with connectors. All dash numbers fit configurations A and B connectors only (MIL-C-83513/1 through MIL-C-83513/4 and MIL-C-83513/6 through MIL-C-83513/9), except for configuration C which is for 100 cavity arrangement only and uses No. 4-40 mounting hardware. Two complete assemblies as shown are supplied with each dash number.

Installation:

M83513/5-02, -03, -05, -06, -12, -13, -15, and -16 jackscrew with retaining ring: Place jackscrew (either slotted or hex, long or low profile types) through mounting hole in connector flange then slide retaining ring into slot in jackscrew.

M83513/5-07 and -17 jackpost: Place jackpost through mounting hole in connector flange and mounting panel (if used). Place lockwasher over screw threads then screw on nut and torque as required.

Part number: See figures 1 through 4.

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - AS, SH
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AT, ME
Navy - CG, MC

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5935-3626)

Source: https://assist.dla.mil Downloaded: 2026-10-23T08:28Z
Check the source to verify that this is the current version before use.