
MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, (CIRCULAR, ENVIRONMENT RESISTING), RECEPTACLE, (SINGLE HOLE MOUNT, BAYONET COUPLING, CRIMP PIN CONTACT), (SERIES III, CLASSES A, G, R, AND W)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the connectors described herein shall consist of this specification and the latest issue of MIL-C-83723.

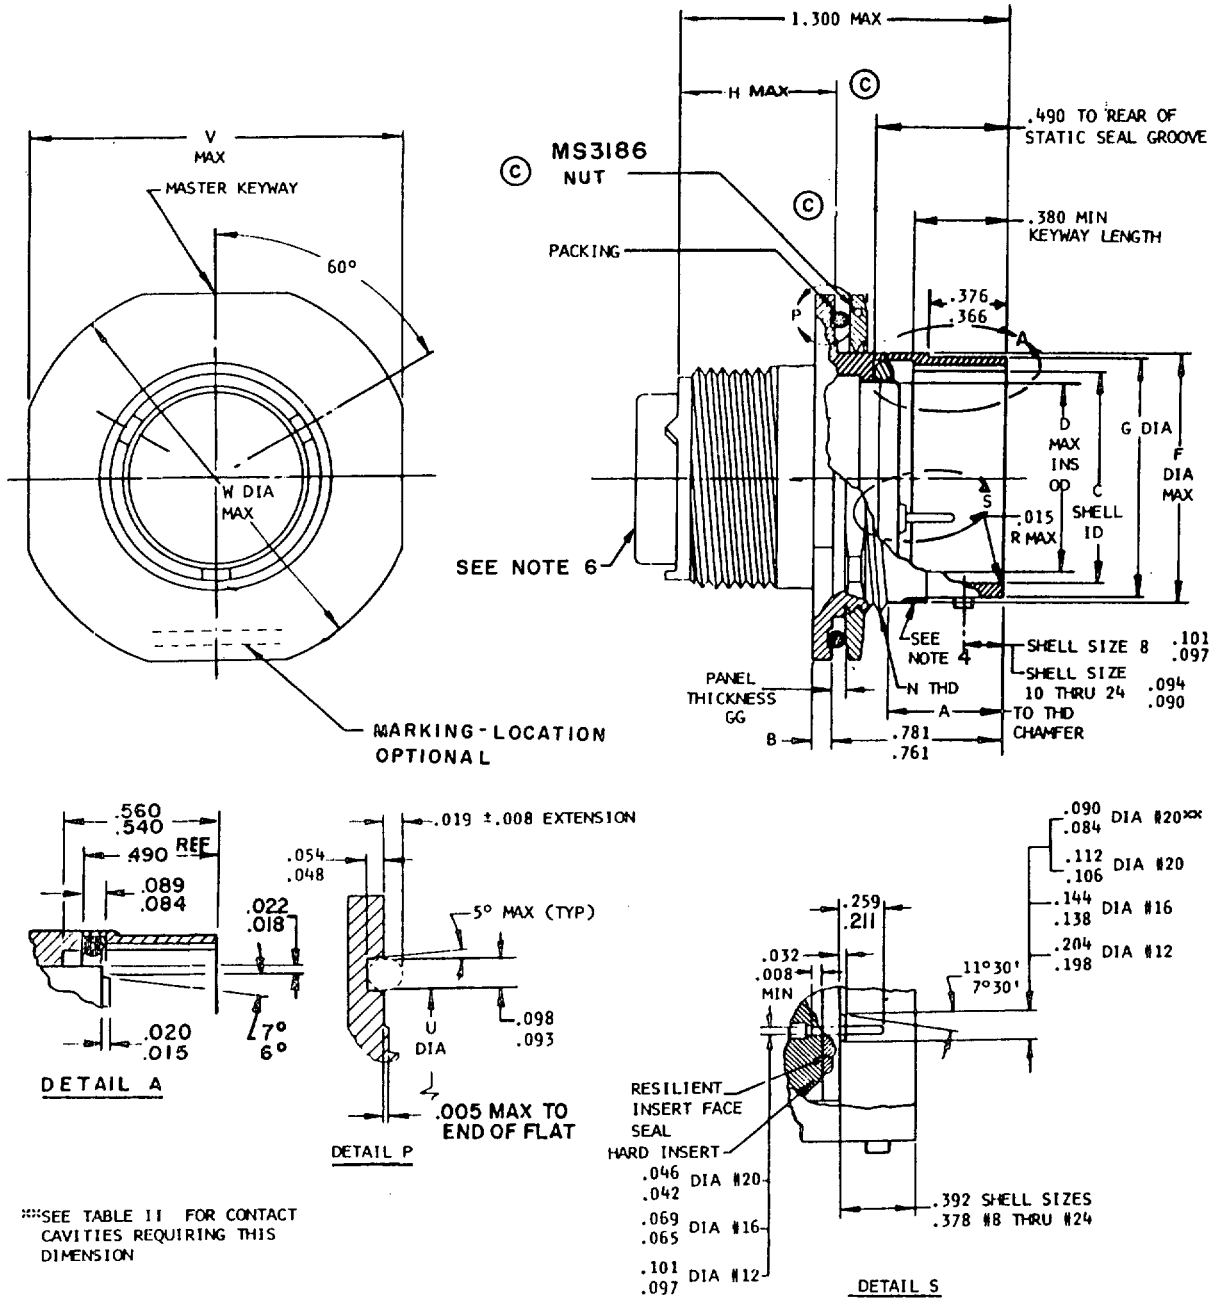


***SEE TABLE II FOR CONTACT CAVITIES REQUIRING THIS DIMENSION

FIGURE 1. Dimensions and configurations.


Ⓒ denotes changes

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

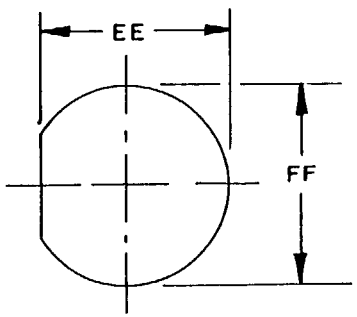

PANEL CUTOUT ©

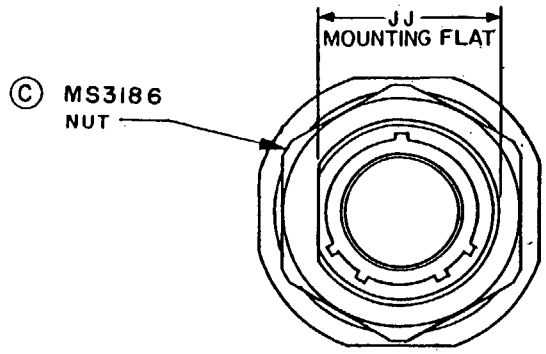

Connector dimensions.

Shell size	A	B	C	D	F	G	H	N thread	U	V	W	EE	FF	GG	JJ
8	.481 .461	.137 .097	.428 .433	.312	.561	.536 .531	.539	.625-20 UN-2A	.670	.979	1.068	.605	.635	.125 .062	.596 .590
10	.481 .461	.137 .097	.530 .535	.388	.696	.659 .654	.539	.750-20 UNEF-2A	.796	1.104	1.192	.730	.760	.125 .062	.721 .715
12	.481 .461	.137 .097	.700 .705	.558	.875	.829 .824	.539	.9375-20 UNEF-2A	.984	1.291	1.380	.917	.947	.125 .062	.908 .902
14	.481 .461	.137 .097	.769 .774	.627	.935	.898 .893	.539	1.000-20 UNEF-2A	1.046	1.391	1.505	.980	1.010	.125 .062	.971 .965
16	.481 .461	.137 .097	.896 .901	.772	1.062	1.025 1.020	.539	1.125-20 UN-2A	1.171	1.516	1.630	1.105	1.135	.125 .062	1.096 1.090
18	.481 .461	.137 .097	1.002 1.007	.860	1.187	1.131 1.126	.539	1.250-18 UNEF-2A	1.296	1.641	1.756	1.229	1.260	.125 .062	1.220 1.214
20	.481 .461	.137 .097	1.127 1.132	.985	1.312	1.256 1.251	.539	1.375-18 UNEF-2A	1.484	1.766	1.860	1.354	1.385	.125 .062	1.345 1.339
22	.481 .461	.168 .128	1.252 1.257	1.110	1.437	1.381 1.376	.539	1.500-18 UNEF-2A	1.609	1.954	2.068	1.479	1.510	.125 .062	1.470 1.464
24	.481 .461	.168 .128	1.377 1.382	1.235	1.562	1.506 1.501	.539	1.625-18 UNEF-2A	1.734	2.079	2.160	1.604	1.635	.125 .062	1.595 1.589

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm
.004	.10	.312	7.92	.696	17.68
.005	.13	.365	9.27	.700	17.78
.008	.20	.366	9.30	.705	17.91
.010	.25	.373	9.47	.711	18.06
.051	.38	.374	9.50	.715	18.16
.018	.46	.376	9.55	.716	18.19
.019	.48	.378	.960	.717	18.21
.020	.51	.380	9.65	.721	18.31
.022	.56	.388	9.86	.726	18.44
.025	.64	.392	9.96	.730	18.54
.032	.81	.408	10.36	.735	18.67
.042	1.07	.413	10.49	.750	19.05
.046	1.17	.417	10.59	.760	19.30
.048	1.22	.428	10.87	.761	19.33
.054	1.37	.433	11.00	.769	19.53
.062	1.57	.450	11.43	.772	19.61
.063	1.60	.459	11.43	.774	19.66
.065	1.65	.461	11.71	.781	19.84
.068	1.73	.471	11.96	.789	20.04
.069	1.75	.476	12.09	.795	20.19
.072	1.83	.481	12.22	.796	20.22
.077	1.96	.485	12.32	.798	20.27
.084	2.13	.490	12.45	.824	20.93
.089	2.26	.494	12.55	.828	21.03
.090	2.29	.524	13.31	.829	21.06
.091	2.31	.529	13.44	.830	21.08
.093	2.36	.530	13.46	.860	21.84
.094	2.39	.531	31.49	.875	22.23
.097	2.46	.535	13.59	.880	22.35
.098	2.49	.536	13.61	.893	22.68
.101	2.57	.539	13.69	.896	22.76
.106	2.69	.540	13.72	.898	22.81
.109	2.77	.548	13.92	.901	22.89
.112	2.84	.557	14.15	.902	22.91
.113	2.87	.558	14.17	.904	22.96
.122	3.10	.560	14.22	.908	23.06
.125	3.18	.561	14.25	.917	23.29
.128	3.25	.586	14.88	.920	23.37
.137	3.48	.590	14.99	.935	23.75
.138	3.51	.591	15.01	.9375	23.81
.144	3.66	.592	15.04	.947	24.05
.168	4.27	.596	15.14	.950	24.13
.198	5.03	.601	15.27	.953	24.21
.204	5.18	.605	15.37	.954	24.23
.211	5.36	.610	15.49	.956	24.28
.237	6.02	.625	15.88	.967	24.56
.242	6.15	.627	15.93	.971	24.66
.259	6.58	.635	16.13	.979	24.87
.288	7.32	.649	16.48	.980	24.89
.293	7.44	.654	16.61	.984	24.99
.301	7.65	.659	16.74	.985	25.02
.310	7.87	.664	16.87	1.000	25.40
		.670	17.02	1.002	25.45
		.673	17.09	1.007	25.58

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm
1.010	25.45	1.376	34.95
1.020	25.91	1.377	34.98
1.025	26.04	1.380	35.05
1.025	26.04	1.381	35.08
1.046	26.57	1.382	35.10
1.062	26.97	1.385	35.18
1.068	27.13	1.391	35.33
1.070	27.18	1.419	36.04
1.090	27.69	1.421	36.09
1.092	27.74	1.437	36.50
1.096	27.84	1.443	36.65
1.104	28.04	1.455	36.96
1.105	28.07	1.464	37.19
1.108	28.14	1.466	37.24
1.110	28.19	1.470	37.34
1.125	28.58	1.479	37.57
1.126	28.60	1.484	37.69
1.127	28.63	1.500	38.10
1.130	28.70	1.501	38.13
1.131	28.73	1.505	38.23
1.132	28.75	1.506	38.25
1.135	28.83	1.510	38.35
1.140	28.96	1.516	38.51
1.142	29.01	1.545	39.24
1.146	29.11	1.562	39.67
1.171	29.74	1.569	39.85
1.187	30.15	1.579	40.11
1.190	30.23	1.591	40.41
1.192	30.28	1.595	40.51
1.214	30.84	1.604	40.74
1.216	30.89	1.609	40.87
1.220	30.99	1.625	41.28
1.229	31.22	1.630	41.40
1.235	31.37	1.635	41.53
1.250	31.75	1.641	41.68
1.251	31.78	1.671	42.44
1.252	31.80	1.705	43.31
1.256	31.90	1.734	44.04
1.257	31.93	1.756	44.60
1.260	32.00	1.766	44.86
1.291	32.79	1.795	45.59
1.295	32.92	1.829	46.46
1.296	32.92	1.860	47.24
1.300	33.02	1.954	49.63
1.312	33.32	2.068	52.53
1.320	33.53	2.079	52.81
1.325	33.66	21.60	54.86
1.329	33.76		
1.339	34.01		
1.341	34.06		
1.345	34.16		
1.354	34.39		
1.375	34.93		
1.376	34.95		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are .005 (0.13 mm) for three place decimals and .01 (0.25 mm) for two place decimals. Angles ±1°.
4. Fully coupled indicator grooves shall be color coded blue, .025 ±.010 wide.
5. Three pins to be within .004 either side of (TP) relative to master polarizing keyway.
6. Rear accessory interchangeability dimensions shall be in accordance with MIL-C-83723.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.

TABLE I. Insert arrangements requiring reduced diameters for raised seal barriers on contact cavities as indicated.

Shell size	Insert arrangements	Contact cavities
8	-3	1, 2, 3
10	-6	1, 2, 3, 4, 5, 6

REQUIREMENTS:

Dimensions and configuration: See figure 1.

This connector mates with MIL-C-83723/75 and MIL-C-83723/77.

For insert arrangements see MIL-STD-1554 and table I.

"0" ring shall be furnished with connector.

Part number example:

M83723/74	R	22	55	N

General specification number

Specification sheet number

Class (see MIL-C-83723)

Shell size (see figure 1)

Insert arrangement (see MIL-STD-1554 and table I)

Polarizing position (see MIL-STD-1554)

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - AR, AV, MI
Navy - EC
Air Force - 11, 15, 99
DLA - ES

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5935-3559-02)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.