MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, (CIRCULAR, ENVIRONMENT RESISTING), RECEPTACLE, (FLANGE MOUNT, BAYONET COUPLING, SOLDER PIN CONTACT), (SERIES III, CLASSES H AND Y)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the connector described herein shall consist of this specification and the latest issue of MIL-C-83723.

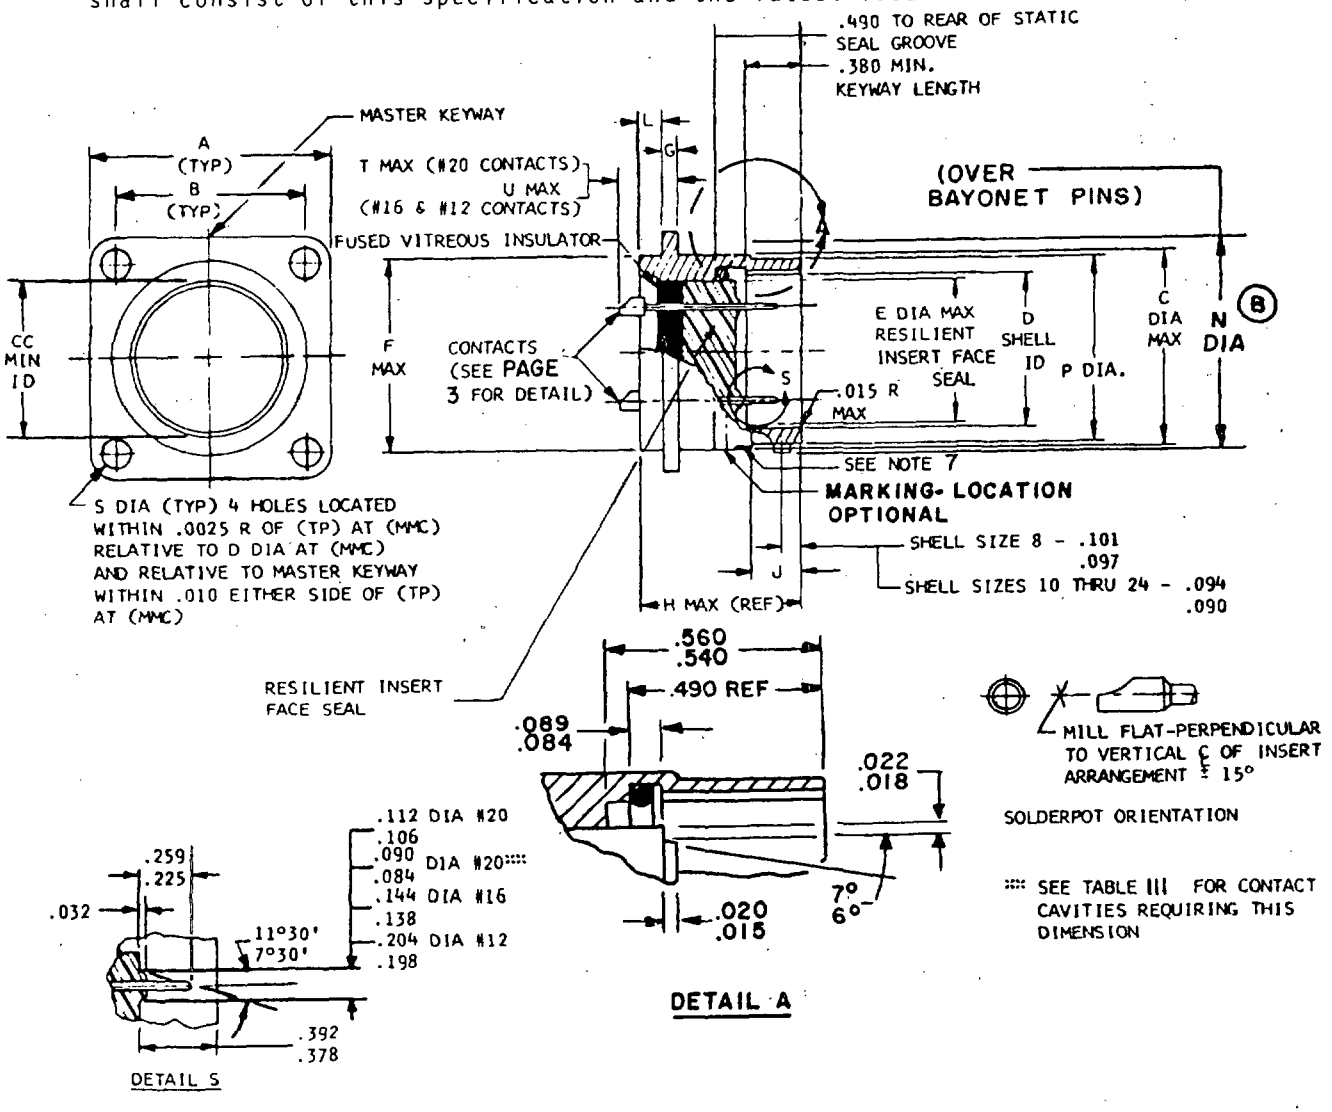


FIGURE 1. Dimensions and configuration.

(B) denotes changes

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.

TABLE I. Connector dimensions.


(B)


SHELL SIZE	A	B	C	D	E	F	G	H	J	L	N	P
8	.812	.594	.561	.428 .433	.312	.500	.072 .052	.890	.376 .366	.108 .078	.620 .602	.536 .531
10	.937	.719	.696	.530 .535	.388	.562	.072 .052	.890	.376 .366	.108 .078	.748 .730	.659 .654
12	1.031	.812	.875	.700 .705	.558	.750	.072 .052	.890	.376 .366	.108 .078	.918 .900	.829 .824
14	1.125	.906	.935	.769 .774	.627	.812	.072 .052	.890	.376 .366	.108 .078	.988 .970	.898 .893
16	1.250	.969	1.062	.896 .901	.772	.937	.072 .052	.890	.376 .366	.108 .078	1.114 1.096	1.025 1.020
18	1.343	1.062	1.187	1.002 1.007	.860	1.062	.072 .052	.890	.376 .366	.108 .078	1.220 1.202	1.131 1.126
20	1.437	1.156	1.312	1.127 1.132	.985	1.187	.072 .052	.890	.376 .366	.108 .078	1.346 1.328	1.256 1.251
22	1.562	1.250	1.437	1.252 1.257	1.110	1.312	.072 .052	.890	.376 .366	.108 .078	1.470 1.452	1.381 1.376
24	1.703	1.375	1.562	1.377 1.382	1.235	1.437	.072 .052	.890	.376 .366	.108 .078	1.596 1.578	1.506 1.501


SIZE	S	T	U	PANEL CUTOUT FOR C DIA	PANEL CUTOUT FOR F DIA	CC
8	.120	.330	.400	.630 .620	.515 .505	.406
10	.120	.330	.400	.758 .748	.582 .572	.443
12	.120	.330	.400	.923 .913	.770 .760	.668
14	.120	.330	.400	.990 .980	.832 .822	.668
16	.120	.330	.400	1.117 1.107	.958 .948	.763
18	.120	.330	.400	1.219 1.209	1.082 1.072	.862
20	.120	.330	.400	1.347 1.337	1.202 1.192	1.108
22	.120	.330	.400	1.462 1.452	1.332 1.322	1.204
24	.149	.330	.400	1.587 1.577	1.452 1.442	1.388

FIGURE 1. Dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.

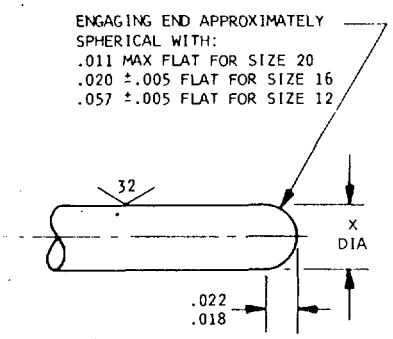

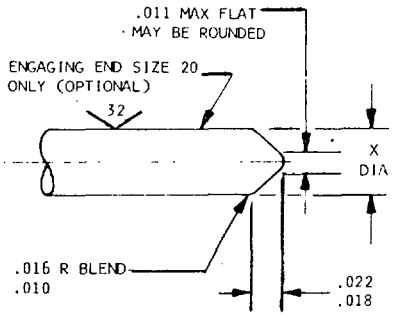

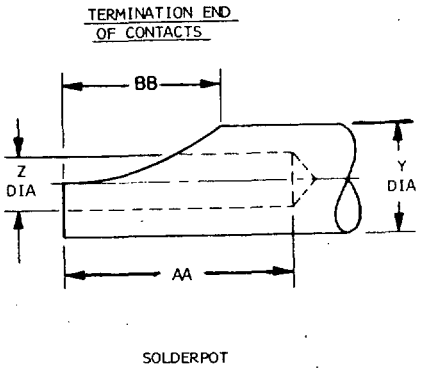

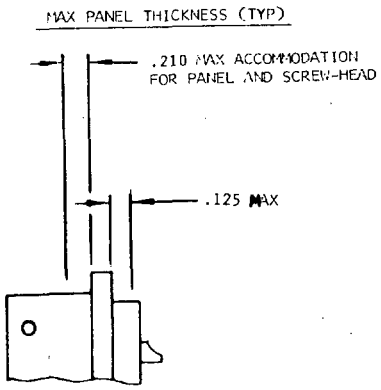


TABLE II Dimensions of Contact Engaging and Termination Ends.

CONT SIZE	X	Y	Z	AA	BB
20	.041 .039	.088 .061	.048 .042	.188 .109	.110 .068
16	.0635 .0615	.116 .096	.075 .069	.251 .172	.141 .109
12	.095 .093	.151 .131	.122 .112	.251 .172	.141 .109

FIGURE 1. Dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.

TABLE III. Insert arrangements requiring reduced diameters for raised seal barriers on contact cavities as indicated.

Shell size	Insert arrangements	Contact cavities
8	-3	1, 2, and 3
10	-6	1, 2, 3, 4, 5, 6

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.000050	.00127	.110	2.79	.536	13.61	.896	22.76	1.202	30.53
.0025	.063	.112	2.84	.540	13.72	.900	22.86	1.204	30.58
.003	.08	.115	2.95	.558	14.17	.901	22.98	1.209	30.71
.004	.10	.120	3.05	.560	14.22	.906	23.01	1.219	30.96
.010	.25	.125	3.18	.561	14.35	.913	23.19	1.220	30.99
.011	.28	.131	3.33	.572	14.53	.923	23.44	1.235	31.37
.015	.38	.138	3.51	.582	14.78	.935	23.75	1.250	31.75
.016	.41	.141	3.58	.594	15.09	.937	23.80	1.251	31.78
.018	.48	.144	3.66	.602	15.29	.942	23.93	1.252	31.80
.020	.51	.149	3.78	.620	15.75	.948	24.08	1.256	31.90
.022	.56	.151	3.84	.627	15.93	.958	24.33	1.257	31.93
.032	.81	.172	4.37	.630	16.00	.969	24.61	1.312	33.32
.039	.99	.188	4.78	.654	16.61	.970	24.64	1.322	33.58
.041	1.04	.198	5.03	.659	16.74	.980	24.89	1.328	33.73
.042	1.06	.204	5.18	.668	16.97	.985	25.02	1.332	33.83
.048	1.22	.210	5.33	.696	17.68	.988	25.10	1.337	33.96
.052	1.32	.225	5.72	.700	17.78	.990	25.15	1.343	34.11
.057	1.45	.251	6.38	.705	17.91	1.002	25.45	1.346	34.19
.061	1.55	.259	6.58	.719	18.26	1.007	25.58	1.347	34.21
.0615	1.56	.312	7.92	.730	18.54	1.020	25.91	1.375	34.93
.0635	1.73	.330	8.38	.748	19.00	1.025	26.04	1.376	34.95
.068	1.73	.336	9.30	.750	19.05	1.031	26.19	1.377	34.98
.069	1.75	.376	9.55	.758	19.25	1.062	26.97	1.381	35.08
.072	1.83	.378	9.60	.760	19.30	1.072	27.23	1.382	35.10
.075	1.90	.380	9.65	.763	19.38	1.082	27.48	1.388	34.26
.078	1.98	.388	9.86	.769	19.53	1.096	27.69	1.437	36.50
.084	2.13	.392	9.96	.770	19.56	1.107	28.12	1.442	36.63
.088	2.24	.400	10.16	.772	19.61	1.108	28.14	1.452	36.88
.089	2.26	.406	10.31	.774	19.66	1.110	28.19	1.462	37.13
.090	2.29	.428	10.87	.812	20.62	1.114	28.30	1.470	37.34
.093	2.36	.433	11.00	.822	20.88	1.117	28.37	1.501	38.13
.094	2.39	.443	11.25	.824	20.93	1.125	28.58	1.506	38.25
.095	2.41	.490	12.45	.829	21.06	1.126	28.60	1.562	39.67
.096	2.44	.500	12.70	.832	21.13	1.127	28.63	1.577	40.06
.097	2.46	.505	12.83	.860	21.86	1.131	28.73	1.578	40.08
.101	2.57	.515	13.08	.862	21.98	1.132	28.75	1.587	40.31
.106	2.69	.530	13.46	.875	22.23	1.156	29.36	1.596	40.54
.108	2.74	.531	13.49	.890	22.61	1.187	30.15	1.703	43.26
.109	2.77	.535	13.59	.893	22.68	1.192	30.28		

NOTES: (Notes 1 through 6 applicable to contacts only).

1. Contact finish: Gold plate .000050 inch min. In accordance with MIL-G-45204. A suitable underplating shall be used. Silver shall not be used. Finish is applied after sealing.
2. Dimensions are in inches. Dimensions apply after plating.
3. 63 all over per ANSI 46.1-62 unless otherwise specified.
4. Remove all burrs and sharp edges .003 to .005 R.
5. Diameters to be concentric within .004 TIR.
6. Diameter in the same cross-sectional plane to be concentric with each other within .003 TIR.
7. Polarizing stripe shall be color coded blue.
8. Three (3) pins to be located within .004 either side of (TP) relative to master polarizing keyway.
9. Unless otherwise specified, tolerances are .005 (.13 mm) for three place decimals and .01 (.25 mm) for two place decimals. Angles ±1°.
10. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.

FIGURE 1. Dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.


REQUIREMENTS:

Dimensions and configuration: See figure 1.

This connector mates with MIL-C-83723/75 and 77.

For insert arrangements, see MIL-STD-1554.

Part number example:

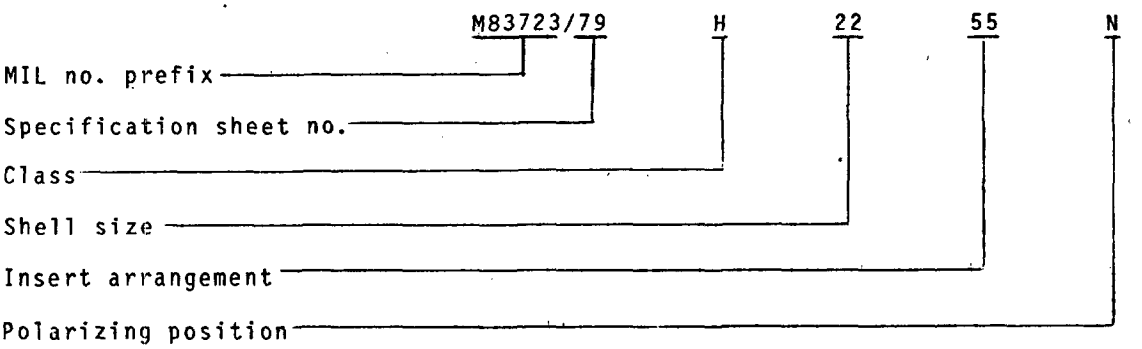

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - MI, AR
Navy - EC
Air Force - 11, 15, 17, 99
DLA - ES

Agent:
DLA - ES

Preparing activity:
Air Force - 85

(Project 5935-3316)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.