METRIC

MIL-PRF-85045/29
27 March 2007

PERFORMANCE SPECIFICATION SHEET

CABLE, FIBER OPTIC, TWELVE/EIGHTEEN FIBER BUNDLE, BLOWN OPTICAL FIBER CABLE CONFIGURATION TYPE 3 (CABLE BUNDLE), APPLICATION B (SHIPBOARD), CABLE CLASS SM AND MM, (METRIC)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-PRF-85045.

CLASSIFICATION:

Fiber optic cable configuration type (Cable bundle): 3.

Fiber cable class: MM (graded-index, glass core and glass cladding, multimode)
SM (dispersion-unshifted, glass core and glass cladding, single mode).

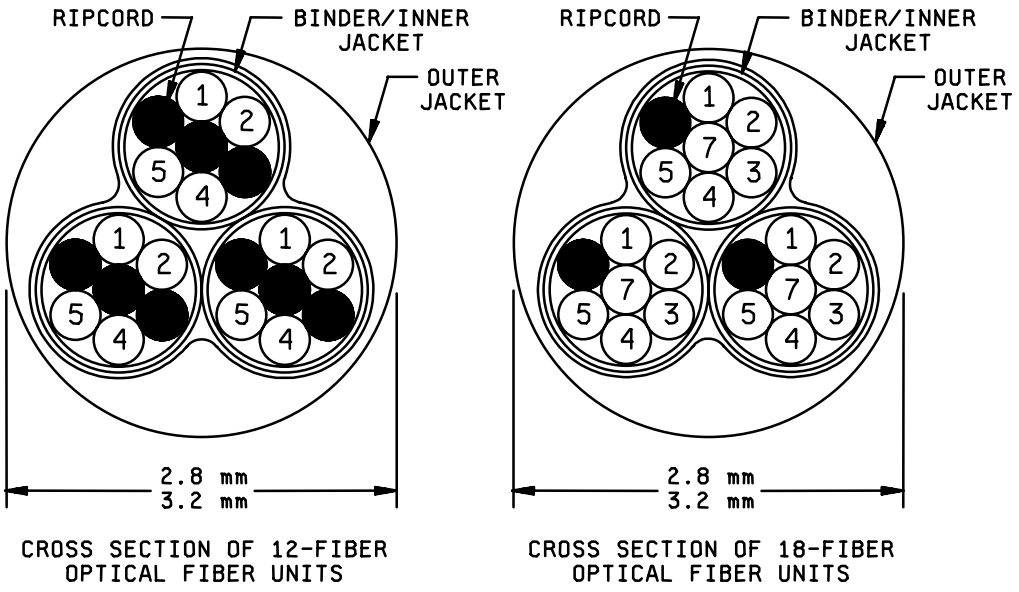


FIGURE 1. Blown optical fiber bundle cable.

AMSC N/A FSC 6015

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:08Z
Check the source to verify that this is the current version before use.

Part or Identifying Number (PIN):

12-fiber bundle cable (multimode):	M85045/29-0112
18-fiber bundle cable (multimode):	M85045/29-0118
12-fiber bundle cable (single mode):	M85045/29-0212
18-fiber bundle cable (single mode):	M85045/29-0218

DESIGN AND CONSTRUCTION:

Fiber:

Type MM fibers shall be in accordance with MIL-PRF-49291/6.

Type SM fibers shall be in accordance with MIL-PRF-49291/7.

Buffer diameter: 250 ± 15 µm.

Finished cable:

Dimensions and configuration: See figure 1. An outer jacket shall be applied over three optical fiber bundle sub-units with rip cords in each sub-unit.

OFCC kink: Not applicable.

Color: Slate or blue (MIL-PRF-49291/6 fiber)
Yellow (MIL-PRF-49291/7 fiber)

Concentricity: ≥ 0.50.

Jacket material: The overall jacket shall be composed of a low halogen, low toxicity polymer material.

Mass per unit length: ≤ 6 kg/km.

Short-term minimum bend diameter: 76 mm. (The short term minimum bend diameter is to be used in all environmental and mechanical tests that specify a cable minimum bend diameter.)

Long term minimum bend diameter: 76 mm.

Minimum continuous length: The minimum continuous length of all cables shall be not less than 0.5 km. If lengths less than 0.5 km are specified in the purchase order, the delivered cable shall be accompanied by certified test data demonstrating that the conformance inspection was performed on a test specimen not less than 0.5 km in length.

Marking: Marking of blown optical fiber bundles is not required. Shipping containers and bundle reels shall be marked.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:08Z
Check the source to verify that this is the current version before use.

Fiber color coding: See table I.

TABLE I. Fiber color coding.

Sub-unit number	Position number	Fiber color	
		12-fiber bundle	18-fiber bundle
1	1	Blue	Blue
	2	Orange	Orange
	3	N/A - ripcord	Green
	4	Green	Brown
	5	Brown	Slate
	6	N/A - ripcord	N/A - ripcord
	7	N/A - ripcord	Red
2	1	Slate	Blue
	2	White	Orange
	3	N/A - ripcord	Green
	4	Red	Brown
	5	Black	Slate
	6	N/A - ripcord	N/A - ripcord
	7	N/A - ripcord	Violet
3	1	Yellow	Blue
	2	Violet	Orange
	3	N/A - ripcord	Green
	4	Pink	Brown
	5	Aqua	Slate
	6	N/A - ripcord	N/A - ripcord
	7	N/A - ripcord	Yellow

NOTE: PINs M85045/29-0112 and M85045/29-0212 only contain 4 fibers in each sub-unit.

PERFORMANCE REQUIREMENTS:

Optical properties:

Maximum attenuation rate: 3.75 dB/km at 850 ± 20 nm, 1.25 dB/km at 1,300 ± 20 nm for type MM fiber.
0.75 dB/km at 1,310 ±20 nm and 1,550 ± 20 nm for type SM fiber.

Bandwidth: Fiber with a minimum bandwidth of 500 MHz-km at 1,300 nm shall be used (multimode cables only). Bandwidth is not specified at 850 nm.

Change in optical transmittance: Measurements to be made at 1,300 ± 20 nm. For shock testing only four fibers are required to be monitored. (At least one fiber per sub-unit.)

Crosstalk: Applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:08Z
Check the source to verify that this is the current version before use.

Mechanical properties:

Tensile loading and elongation: Not applicable.

Operating tensile loading: Not applicable.

Dynamic bend: Not applicable.

Low temperature flexibility: Not applicable.

Cyclic flexing: 500 cycles at +25°C ±2°C and 100 cycles at –28°C ±2°C. Change in optical transmittance measurements are to be made every 100 cycles for the 500-cycle exposure and every 25 cycles for the 100-cycle exposure. Each change in optical transmittance measurement shall be performed with the test specimen in the same position in the test cycle. The cycling may be halted to perform the change in optical transmittance measurement.

Crush: Not applicable.

Cable twist bending: Not applicable.

Impact: Not applicable

Corner bend: Not applicable.

Dripping: Applicable.

Cable jacket tear strength: Applicable, 40 N/cm minimum, 50 N/cm maximum.

Cable scraping resistance: Not applicable.

Cable to cable abrasion: Not applicable.

Durability of marking: Not applicable.

Environmental properties:

Temperature range:

Operating: -28°C to +65°C.

Nonoperating: -40°C to +70°C.

Storage: -40°C to +70°C.

Temperature cycling: Change in optical transmittance measurements may be made periodically. At a minimum, one optical transmittance measurement shall be made over a period of one hour at the end of each temperature plateau.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:08Z
Check the source to verify that this is the current version before use.

Temperature humidity cycling: Change in optical transmittance measurements may be made periodically. At a minimum, one optical transmittance measurement shall be made at the end of each temperature plateau.

Storage temperature: Applicable.

Fluid immersion: Not applicable.

Flaming smoke generation: $D_m \leq 225$ when tested in the flaming condition in accordance with ASTM-E-662.

Shock: Applicable. The bundle shall be tested within a tube cable.

Paint susceptibility: Not applicable.

Chemical properties:

Halogen content: < 0.2 percent.

Qualification by similarity:

Manufacturers who produce products for both MIL-PRF-85045/27 and products for this specification sheet, and are qualified under MIL-PRF-85045/27, and pass the attenuation rate, cyclic flexing, flame extinguishing, flaming smoke generation, and size inspection specified herein, are qualified under this specification sheet. This qualification by similarity is applicable only if the 6-fiber bundle sub-unit and the bundle cable jacket for the unqualified bundle cable are the same as those for the previously qualified bundle cable. Testing may be performed on a single length of cable, with a minimum length of 0.5 km.

Manufacturers who are qualified under this specification sheet for the 18-fiber bundle cable and whose 12-fiber bundle cable passes the visual and mechanical inspections and temperature humidity cycling specified herein, are qualified under this specification sheet for the 12-fiber bundle cable. This qualification by similarity is applicable only if the fiber bundle sub-unit and the bundle cable jacket for the unqualified 12-fiber bundle cable are the same as those for the previously qualified 18-fiber bundle cable. This qualification by similarity is applicable if the only difference between the previously qualified cable and the cable under test is that the fiber count has been changed from 18 fibers to 12 fibers. Testing may be performed on a single length of cable, with a minimum length of 0.5 km.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:08Z
Check the source to verify that this is the current version before use.

Manufacturers who are qualified under this specification sheet for multimode fiber cable and whose single mode fiber cable passes the visual and mechanical, attenuation rate, temperature cycling, temperature humidity cycling, storage temperature, cyclic flexing, and thermal shock inspections specified herein, are qualified under this specification sheet for single mode fiber cable. This qualification by similarity is applicable if the only difference between the previously qualified cable and the cable under test is that the optical fiber has been changed from a multimode fiber to a single mode fiber. Testing may be performed on either one or two lengths of cable, each with a minimum length of 0.5 km. Test order must be observed up to and including the storage temperature test. If only one cable length is used, the thermal shock test shall be performed after the storage temperature test. Manufacturers who are qualified under MIL-PRF-85045/27 for both multimode and single mode fiber cable and under this specification sheet for multimode fiber cable are qualified under this specification sheet for single mode fiber cable.

Referenced documents. In addition to MIL-PRF-85045, this document references the following:

MIL-PRF-49291/6 MIL-PRF-49291/7 MIL-PRF-85045/27
ASTM-E-662

Custodians:
Navy - SH
Air Force - 99
DLA - CC

Preparing activity:
DLA – CC

(Project 6015-2006-002)

NOTE: The activities listed above were interested in this document on the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:08Z
Check the source to verify that this is the current version before use.