INCH-POUND

MIL-R-83580/4

23 November 1993

ASSOCIATED DETAIL SPECIFICATION


RESISTOR, FIXED, FILM, CHIP,
ESTABLISHED RELIABILITY,
STYLE RSM1505

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the detail requirements for style RSM1505, fixed, film, chip, resistors. This style is available in characteristics H, E, K, and M, resistance tolerances .1, 1, 2, and 5 percent and all termination materials.

1.2 Part or Identifying Number (PIN). Chip resistors covered by this specification shall be identified by a PIN which shall consist of the basic number of this specification and a coded dash number. The PIN shall be in the following form:

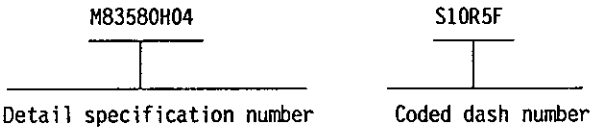


The coded dash number shall be derived in accordance with MIL-R-83580.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

MILITARY

MIL-R-39032 - Resistors, Packaging of.
MIL-R-83580 - Resistors, Fixed, Film, Chip, Established Reliability, General Specification for.

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Building 4D, Robins Avenue, Philadelphia, PA 19111-5094.)

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: SMC/SDFP, P.O. Box 92960, Worldway Postal Center, Los Angeles, CA 90009-2960, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of the document or by letter.

AMSC N/A

FSC 5905

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:13Z
Check the source to verify that this is the current version before use.

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein (except for related associated detail specifications, specification sheets, or MS standards), the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Associated detail specification. The individual item requirements shall be in accordance with MIL-R-83580 and as specified herein.

3.2 Design and construction. The resistors shall be of the design, construction, and physical dimensions specified on figure 1, as applicable.

3.3 Power rating. The power rating for characteristics H, E, and Y shall be 100 milliwatts. For characteristics K and M, the power rating shall be 150 milliwatts.

3.4 Voltage rating. The maximum continuous working voltage shall not exceed 40 volts.

3.5 Resistance. Minimum and maximum resistance values shall be as follows:

| Resistance tolerance | Minimum resistance | Maximum resistance |
|---|---|---|
| ±0.1% | 100.0 ohms | 500,000 ohms |
| ±1.0% | 5.62 ohms | 4.75 megohms |
| ±2.0% | 5.6 ohms | 4.7 megohms |
| ±5.0% | 5.6 ohms | 4.7 megohms |

4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection. Sampling and inspection procedures shall be in accordance with MIL-R-83580.

5. PACKAGING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-R-83580.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)


6.1 Notes. The notes specified in MIL-R-83580 are applicable to this specification.

6.2 Tolerance for wraparound termination. The added tolerance for the wraparound type termination is intended to apply only to termination, metallization, and pretinning material.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:13Z
Check the source to verify that this is the current version before use.

CONFIGURATION A

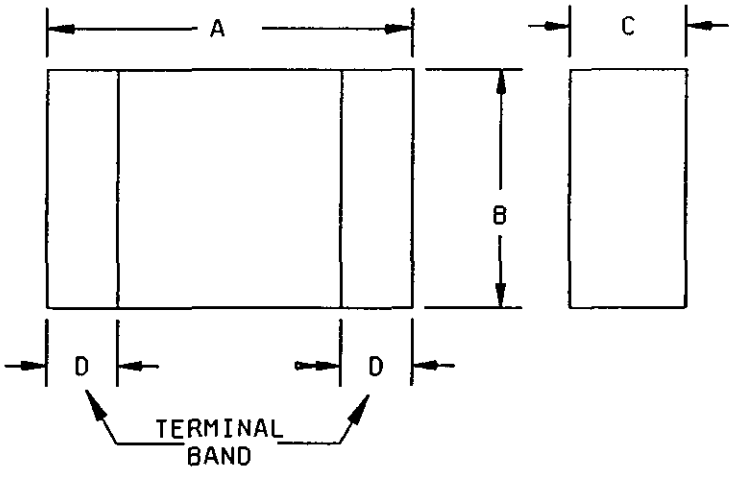


| Symbol | Dimensions | Millimeters |
|---|---|---|
| A | .150 | 3.81 |
| B | .050 | 0.27 |
| C | .012/.030 | 0.30/0.76 |
| D | .015 | 0.38 |


NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005 (0.13 mm).
4. The pictorial view of the styles above are given as representative of the envelope of the item. Slight deviations from the outline shown, which are contained within the envelope, and do not alter the functional aspects of the device are acceptable.
5. Covers termination materials S, W, D, and T.

FIGURE 1. Style RSM1505.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:13Z
Check the source to verify that this is the current version before use.

CONFIGURATION B

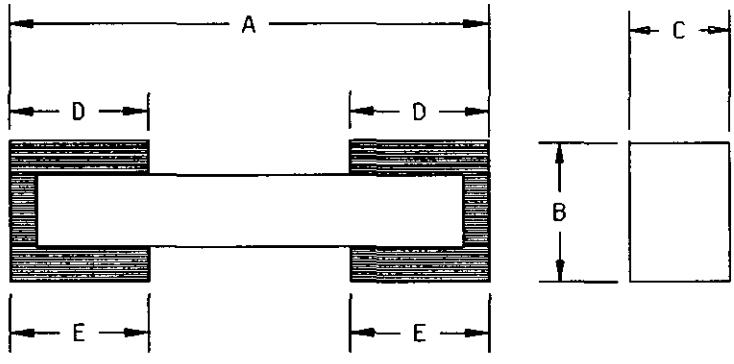


| Termination material code letter | Dimension A | | Dimension B | | Dimension C | | Dimension D | | Dimension E | |
|---|---|---|---|---|---|---|---|---|---|---|
| | Inches | mm | Inches | mm | Inches | mm | Inches | mm | Inches | mm |
| C, U, B, G | .155 ±.007 | 3.94 ±0.18 | .050 | 1.27 | .015/.033 | 0.38/0.84 | .015 | 0.38 | .015 | 0.38 |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Covers termination materials C, U, B, and G which are wraparound terminations.
4. Unless otherwise specified, tolerrance is ±.005 (0.13 mm).

FIGURE 1. Style RSM1505 - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:13Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 19
NASA - NA

Review activities:
Army - AR, AT, AV, ME
Navy - AS, CG, MC, OS
Air Force - 17, 85, 99
DLA - ES

Preparing activity:
Air Force - 19

Agent:
DLA - ES

(Project 5905-1259-04)



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:13Z
Check the source to verify that this is the current version before use.

# STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

## INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.

2. The submitter of this form must complete blocks 4, 5, 6, and 7.

3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

| I RECOMMEND A CHANGE: | 1. DOCUMENT NUMBER MIL-R-83580/4 | 2. DOCUMENT DATE (YYMMDD) |
|---|---|---|

3. DOCUMENT TITLE

RESISTOR, FIXED, FILM, CHIP, ESTABLISHED RELIABILITY, STYLE RSM1505

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

| a. NAME (Last, First, Middle initial) | b. ORGANIZATION | |
|---|---|---|
| c. ADDRESS (Include Zip Code) | d. TELEPHONE (Include Area Code)<br>(1) Commercial<br>(2) AUTOVON (If applicable) | 7. DATE SUBMITTED (YYMMDD) |

8. PREPARING ACTIVITY

| a. NAME<br>SSD/SDMS<br>P.O.C ALAN WANG | b. TELEPHONE (Include Area Code)<br>(1) Commercial<br>213-643-1966<br>(2) AUTOVON<br>833-1966 |
|---|---|
| c. ADDRESS (Include Zip Code)<br>P.O. Box 92960<br>Los Angeles AFS<br>Los Angeles, CA 9009-2960 | IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:<br>Defense Quality and Standardization Office<br>5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466<br>Telephone (703) 756-2340 AUTOVON 289-2340 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:13Z
Check the source to verify that this is the current version before use.