FED SUP CLASS
9510

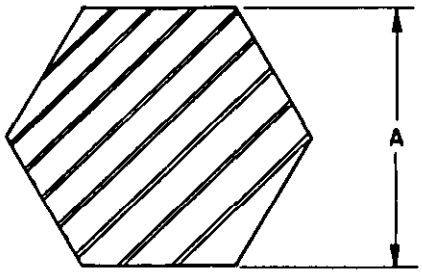


TABLE I. DASH NUMBERS AND DIMENSIONS

DASH NUMBER	A	HEAT TREATMENT	FORMING 1/ PROCESS	ADDITIONAL 2/ REQUIREMENTS
001	.500	ANNEALED	C	MF
003	.562	ANNEALED	C	MF
005	.750	NORMALIZED	C	MF
007	.750	NORMALIZED & TEMPERED	H	MF
009	.750	ANNEALED	C	MF
011	.875	NORMALIZED	C	MF
013	.937	NORMALIZED & TEMPERED	C	MF
015	.938	ANNEALED	C	MF
017	1.000	ANNEALED	C	MF
019	1.062	ANNEALED	C	MF
021	1.125	ANNEALED	H	DO
023	1.250	ANNEALED	C	MF
025	1.250	ANNEALED	H	DO
027	1.375	ANNEALED	C	MF
029	1.437	ANNEALED	C	MF
031	1.500	ANNEALED	C	MF
033	2.000	ANNEALED	H	DO
035	2.500	ANNEALED	C	MF

1/ SEE REQUIREMENT 3
2/ SEE REQUIREMENT 4

APPROVED DEC 21 1987 REVISED

P.A.	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
NAVY-AS Other Cust ARMY-MR AIR FORCE-99		BAR, METAL, HEXAGONAL, ALLOY STEEL E 4340	MS14529
PROCUREMENT SPECIFICATION MIL-S-5000	SUPERSEDES		PAGE 1 OF 2

DD FORM 1 MAY 73 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 9510-0592

USER ACTIVITIES:

REVIEWER ACTIVITIES:
ARMY-EA,ER,MI
DLA-IS

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Use for all new engineering and design applications and for repetitive use shall be made from this unless when applicable.

AMSC N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:45Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
9510

REQUIREMENTS:

1. MATERIAL: ALLOY STEEL, E4340 (UNS G43406), AS SPECIFIED IN PROCUREMENT DOCUMENT.

2. LENGTH: STANDARD LENGTH OF HEXAGONAL BAR IS 10 FEET MINIMUM, 12 FEET MAXIMUM.

3. FORMING PROCESS:

   COLD DRAWN - CODE "C"
   HOT ROLLED - CODE "H"

4. ADDITIONAL REQUIREMENTS:

   DESCALED OVERALL - CODE "DO"
   MILL FINISH - CODE "MF"

5. PART NUMBER: THE PART NUMBER CONSISTS OF THE BASIC MS NUMBER, PLUS A DASH NUMBER FROM TABLE I.

   EXAMPLE: MS14529-001
   (SEE TABLE I)
   BASIC MS NUMBER

6. MARKING: IRON AND STEEL PRODUCTS SHALL BE MARKED IN ACCORDANCE WITH FED-STD-183 WITH THE EXCEPTION THAT A PART NUMBER FROM THIS MILITARY STANDARD SHALL BE INCLUDED AS PART OF THE IDENTIFICATION MARKING.

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.

2. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.

3. REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.

APPROVED DEC 21 1987 REVISED

USER ACTIVITIES:

REVIEWER ACTIVITIES:
ARMY-EA,ER,MI
DLA-IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A.	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
NAVY-AS Other Cust ARMY-MR AIR FORCE-99		BAR, METAL, HEXAGONAL, ALLOY STEEL E4340	MS14529
PROCUREMENT SPECIFICATION MIL-S-5000	SUPERSEDES		PAGE 2 OF 2

DD FORM 1 MAY 73 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 9510-0592

☆U.S. GOVERNMENT PRINTING OFFICE: 1988 — 505-033/91432

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:45Z
Check the source to verify that this is the current version before use.