INCH-POUND


MS20762B
8 March 2013
SUPERSEDING
MS20762A
11 December 1970

DETAIL SPECIFICATION SHEET

ELBOW, FLARED TUBE, FLANGED, SWIVEL, 90°

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and SAE AS4875.

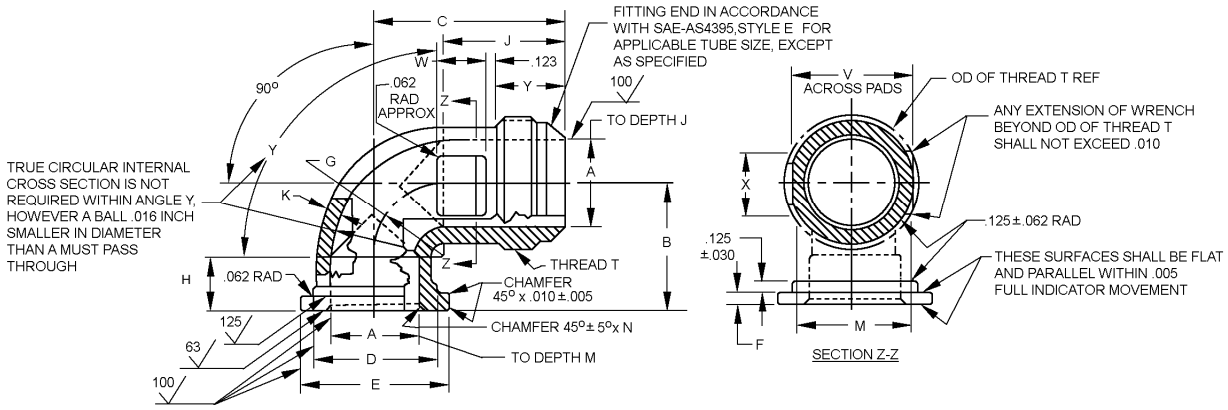

Inches	mm	Inches	mm
.010	0.25	.062	1.57
.030	0.76	.123	3.12
.016	0.41	.125	3.18

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Internal flow passage around bend shall be smooth and free from projections.

FIGURE 1. Elbow, flanged 90°.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:24Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions. 1/ 2/ 3/ 4/

Dash number	Tube	Thread T	A	B	C	D	E	F	G	H
Steel	OD	SAE AS8879	± .003	+.047 -.000	+.047 -.000	+.000 -.005	+.000 -.005	+.000 -.005	Radius reference	+.047 -.000
-12	.750	1.0625-12UN-3A	.609	1.156	1.938	.938	1.250	.156	.594	.562
-12-16					2.000		1.500			
-16	1.000	1.1875-12UN-3A	.814	1.201	2.125	1.188			.719	
-20	1.250	1.3750-12N-3A	1.078	1.500	2.375	1.500	1.644		.875	.625
-20-24				1.562	2.562		2.125	.188		.650
-24	1.500	1.8750-12N-3A	1.312	1.688	2.688	1.750			1.000	
-32	2.000	2.500-12UN-3A	1.781	2.042	3.375	2.375	2.750		1.312	.750
-40	2.500	3.000-12UN-3A	2.281	2.375	3.500	2.875	3.201		1.582	.812
-48	3.000	3.500-12UN-3A	2.781	2.625	3.675	3.375	3.701		1.812	

TABLE I. Dimensions - Continued. 1/ 2/ 3/ 4/

Dash number	J	K		M	N	V	W	X	Y	Weight Max		
Steel	+.047 -.000	Min	Max	± .015	± .015	± .015	Approx	Approx	± .015	Al Alloy	Steel	Ti
-12	1.344	.125	.144	.922	.669	.891	.500	.562	.724	.12	.34	.20
-12-16	1.406									.15	.42	.25
-16		.141	.176	1.172	.904	1.156	.562	.625	.771	.18	.50	.30
-20	1.500	.156	.221	1.484	1.130	1.438	.625	.750	.818	.32	.90	.53
-20-24	1.650									.36	1.00	.60
-24		.172	.234	1.734	1.372	1.710	.688		.943	.45	1.26	.74
-32	2.062	.203	.322	2.309	1.841	2.250	.750	.938	1.193	1.02	2.88	1.69
-40	1.938	.234	.333	2.659	2.341	2.812	.875	1.000	.969	1.37	3.84	2.26
-48	2.042	.250	.344	3.389	2.841	3.344	1.000		1.047	1.62	5.10	2.68

1/ Dimensions are in inches.
2/ Metric equivalents are given for information only.
3/ Aluminum alloy 2014 and 2024 parts are cancelled. Use Aluminum alloy 7075 parts for new design. Cancelled parts may be used till stock is exhausted.
4/ Diameters A, D and E shall be concentric with each other within .010 full indicator movement.

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
0.003	0.08	0.203	5.16	0.530	13.46	0.814	20.68	1.156	29.36	1.562	39.67	2.042	51.87	2.750	69.85
0.005	0.14	0.221	5.61	0.562	14.27	0.818	20.78	1.172	29.77	1.582	40.18	2.062	52.37	2.781	70.64
0.015	0.38	0.234	5.94	0.594	15.09	0.875	22.23	1.188	30.18	1.620	41.15	2.125	53.98	2.812	71.42
0.047	1.19	0.250	6.35	0.600	15.24	0.891	22.63	1.193	30.30	1.644	41.76	2.250	57.15	2.841	72.16
0.120	3.05	0.300	7.76	0.609	15.47	0.900	22.86	1.201	30.51	1.650	41.91	2.260	57.40	2.875	73.03
0.125	3.18	0.320	8.13	0.625	15.88	0.904	22.96	1.250	31.75	1.688	42.88	2.281	57.94	2.880	73.15
0.141	3.58	0.322	8.18	0.650	16.51	0.922	23.42	1.260	32.00	1.690	42.93	2.309	58.65	3.000	76.20
0.144	3.66	0.333	8.46	0.669	16.99	0.938	23.83	1.312	33.32	1.710	43.43	2.341	59.46	3.201	81.31
0.150	3.81	0.340	8.64	0.688	17.48	0.943	23.95	1.344	34.14	1.734	44.04	2.375	60.33	3.344	84.94
0.156	3.96	0.344	8.74	0.719	18.26	0.969	24.61	1.370	34.80	1.750	44.45	2.500	63.50	3.375	85.73
0.172	4.37	0.360	9.14	0.724	18.39	1.000	25.40	1.372	34.85	1.781	45.24	2.562	65.07	3.389	86.08
0.176	4.47	0.362	9.19	0.740	18.80	1.020	25.91	1.406	35.71	1.812	46.02	2.625	66.68	3.500	89.90
0.180	4.57	0.420	10.67	0.750	19.05	1.047	26.59	1.438	36.53	1.841	46.76	2.659	67.54	3.675	93.35
0.188	4.78	0.450	11.43	0.771	19.58	1.078	27.38	1.484	37.69	1.938	49.23	2.680	68.07	3.701	94.01
0.200	5.08	0.500	12.70	0.812	20.62	1.130	28.70	1.500	38.10	2.000	50.80	2.688	68.28	3.840	97.54

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:24Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimensions and configuration: See figure 1 and table I.

Dimensioning and tolerancing are in accordance with ASME Y14.5.

For nominal use on fuel and oil systems.

Materials. Materials and designators shall be in accordance with SAE AS4875.

Material and size designators shall be in accordance with table II.

TABLE II. Material and size designators. 1/

Size number	Size number with letter material designator					
	Steel (Blank)	Aluminum Alloy 2/	Aluminum alloy		CRES 3/	Titanium 4/
12	-12	-D12	-W12		-R12	-T12
12-16	-12-16	-D12-16	-W12-16		-R12-16	-T12-16
16	-16	-D16	-W16		-R16	-T16
20	-20	-D20	-W20		-R20	-T20
20-24	-20-24	-D20-24	-W20-24		-R20-24	-T20-24
24	-24	-D24	-W24		-R24	-T24
32	-32	-D32	-W32		-R32	-T32
40	-40	-D40	-W40		-R40	-T40
48	-48	-D48	-W48		-R48	-T48

1/ Material designators blank/none, “D”,”W”, “J”, “R”, and “T” are in accordance with SAE AS4875.
2/ Inactive material code: PINs with material code letter D are inactive for new design use W.
3/ Corrosion resistant steel (CRES).
4/ Titanium shall not be used in oxygen systems.

Finishes. Finishes for the elbow shall be in accordance with SAE AS4875.

Finish designators shall be as specified in table III.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:24Z
Check the source to verify that this is the current version before use.

TABLE III. Elbow finish code. 1/

PIN code dash letter	Material	Plating finish
Blank	Steel	Cadmium plating in accordance with SAE-AMS-C-81562, type II, class 3 or SAE-AMS-QQ-P-416, type II, class 2.
	Aluminum 2/	Anodize in accordance with MIL-A-8625, type II.
	CRES	No additional finish. Passivation in accordance with SAE-AMS2700, type 6 or 7.
	Titanium 3/	Fluoride phosphated in accordance with SAE-AMS2486.
A	Steel	Aluminum-nickel in accordance with ASTM F1136/F1136M, grade 3, NC.
D	Aluminum 2/	Anodize above with NAVAIR trivalent chromium pretreatment (TCP) in accordance with MIL-DTL-81706, type II, class 1A.
DA	Aluminum 2/	Chemical conversion coating in accordance with, MIL-DTL-5541, type II, class 3.
CN	Steel	Cadmium plating in accordance with SAE-AMS-C-81562, type II, class 3 or SAE-AMS-QQ-P-416, type II, class 2 with NAVAIR TCP in accordance with MIL-DTL-81706, type II, class 1A.
G	Steel	Zinc plating with colorless passivate in accordance with ASTM B633, type V, Fe/Zn 25.
H	Steel	Zinc phosphate finish in accordance MIL-DTL-16232 type Z, class 1. 5/
J	Steel	Zinc plating in accordance with ASTM B633; type II or III, Fe/Zn 5, or ASTM B695, type II, class 5.
N	Steel	NAVAIR TCP in accordance with MIL-DTL-81706, type II, class 1A.
R	Steel	Zinc plating in accordance with ASTM B633; type VI, Fe/Zn 5.
T	Titanium 3/ 4/	Anodized in accordance with SAE-AMS2488, type 2.
V	Steel	Zinc-nickel in accordance with SAE-AMS2417, type 1.
W	Aluminum alloy 7075-T73 or T7352 in accordance with SAE AS4875	Anodize in accordance with MIL-A-8625, type 2, dye brown.
WC	Aluminum alloy 7075-T73 or T7352 in accordance with SAE AS4875	Chemical conversion coating in accordance with, MIL-DTL-5541, type II, class 3.
Z	Steel	Zinc may be any zinc plating's from PIN codes H, J, R, V. 6/
ZN	Steel	Zinc may be any zinc plating's from PIN codes H, J, R, V with NAVAIR TCP in accordance with MIL-DTL-81706, type II, class 1A. 6/


1/ All finished materials shall withstand 96 hours salt spray test minimum.
2/ Aluminum alloys 2014 and 2024 shall be dyed light blue.
Unless otherwise specified aluminum alloy 7075 shall be dyed brown.
3/ Titanium shall not be used in oxygen systems.
4/ Color equivalent to numbers in accordance with FED-STD-595/36076, FED-STD-595/36081, FED-STD-595/36099, FED-STD-595/36118, FED-STD-595/36134, FED-STD-595/36152, FED-STD-595/36170, FED-STD-595/36173, and FED-STD-595/36176.
5/ Hexavalent chromium free.
6/ Not for use in Aircraft.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:24Z
Check the source to verify that this is the current version before use.

Surfaces. All machined surfaces shall be finished to 250 μin Ra (.00635mm), unless otherwise specified.

Fitting surface shall be free of all burrs and slivers.
Part or Identifying Number (PIN): The PIN consists of prefix “MS” the specification sheet number, and a dash, a letter for material/finish and size code. Unassigned PIN’s shall not be used.

Example of PIN: MS20762W32

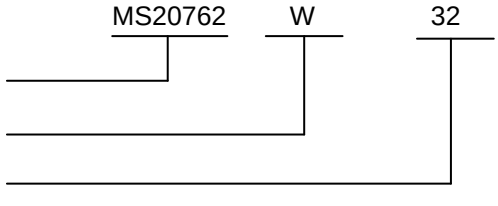

Marking. The complete PIN shall be permanently marked on an unfinished surface.

Guidance on use of alternative parts with less hazardous or nonhazardous materials. This specification provides for a number of alternative plating materials via the PIN. Users should select the PIN with the least hazardous material that meets the form, fit and function requirements of their application.

Supersession data: Aluminum alloys 2014 and 2024 "D" designator is inactive for new design. For new design use aluminum alloy 7075 "W" designator.

Changes from previous issue. Marginal notations are not used in the revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Referenced documents. In addition to SAE AS4875, this document references the following:

ASTM B633	MIL-DTL-81706	FED-STD-595/36170	SAE-AS4395
ASTM B695	FED-STD-595/36076	FED-STD-595/36173	SAE AS8879
ASTM F1136/F1136M	FED-STD-595/36081	FED-STD-595/36176	SAE-AMS-QQ-P-416
ASME Y14.5	FED-STD-595/36099	SAE-AMS2417	SAE-AMS-C-81562
MIL-DTL-5541	FED-STD-595/36118	SAE-AMS2486	
MIL-A-8625	FED-STD-595/36134	SAE-AMS2488	
MIL-DTL-16232	FED-STD-595/36152	SAE-AMS2700	

CONCLUDING MATERIAL

Custodians:
Army - AV
Navy – AS
Air Force – 99
DLA - CC

Preparing activity:
DLA - CC

(Project 4730-2012-088)

Review activities:
Army – AR
Navy – MC, SA
Air Force - 71

NOTE: The activities listed above were interested in this document as of the date of this document. Since organization and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:24Z
Check the source to verify that this is the current version before use.