
USER ACTIVITIES: NAVY - AS
DLA - CS

REVIEWER ACTIVITIES:
NAVY - AS
DLA - CS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

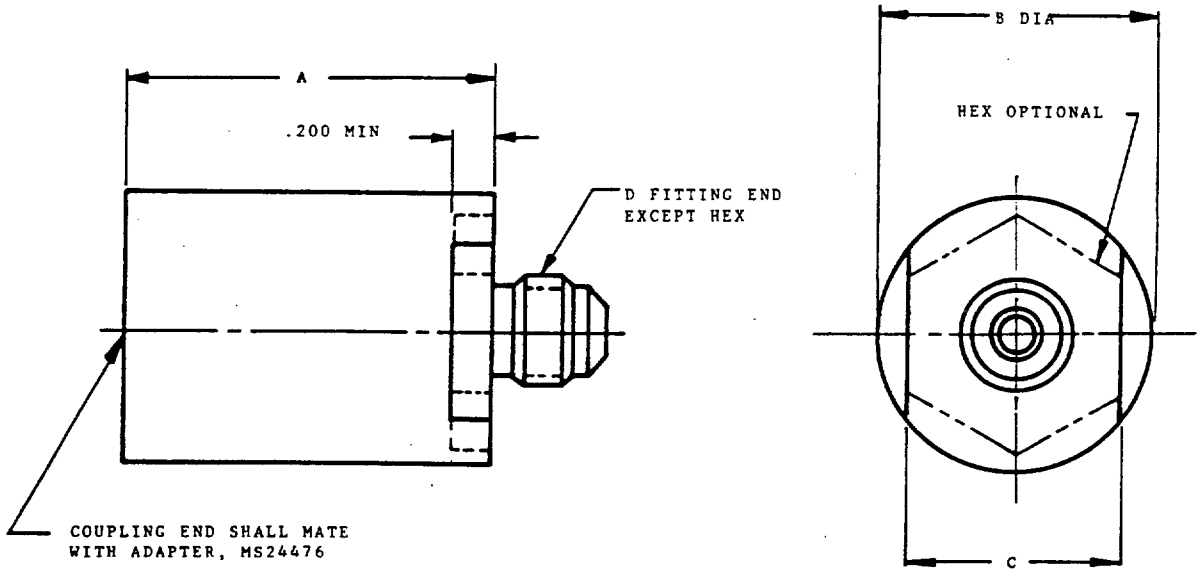

DASH NO.	A MAX	B MAX	(a) C MIN	D STYLE E	ADAPTER	MIN FLOW RATE WITH -45°F OIL (GPM)	MAX PRESSURE DROP PSI
-1	2.75	2.00	1.125	MS33656-10	MS24476-1	1.0	35
-2	3.50	2.50	1.375	MS33656-12	MS24476-2		20

(a) C DIMENSION SHALL FIT STANDARD WRENCH OPENING.

MATERIAL: SEE PROCUREMENT SPECIFICATION.
FINISH: SEE PROCUREMENT SPECIFICATION.
REMOVE BURRS AND BREAK SHARP EDGES .016 MAX.
DIMENSIONS IN INCHES.

FOR USE WITH SYNTHETIC LUBRICATING AND PRESERVATIVE OIL.
THIS OUTLINE REPRESENTS THE MAX ENVELOPE OF THE NOZZLE UNLESS OTHERWISE SPECIFIED.

(E) CERTAIN PROVISIONS (COUPLING END SHALL MATE WITH ADAPTER MS24476; DIMENSIONS A AND B) OF THIS STANDARD ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT ASCC AIR STD 11/12 AND 18/9. WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED, THE DEPARTMENTAL CUSTODIAN WILL INFORM THEIR RESPECTIVE DEPARTMENTAL STANDARDIZATION OFFICE SO THAT APPROPRIATE ACTION MAY BE TAKEN RESPECTING THE INTERNATIONAL AGREEMENT CONCERNED.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 17 JUN 57 REVISED (A) 4 JUN 59 (B) 27 OCT 59 (C) 18 DEC 64 (D) 7 FEB 68 (E) 19 SEP 1974

P. A.	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
AIR FORCE - 82 (E) Other Cust NAVY - AS AF - 99		NOZZLE, PRESSURE LUBRICATING OIL SERVICING, LOCKING	MS24475 ASG
PROCUREMENT SPECIFICATION MIL-N-25677	SUPERSEDES:		SHEET 1 OF 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:54Z
Check the source to verify that this is the current version before use.