
NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation the United States Government thereby incurs no responsibility nor any obligation whatsoever and the fact that the Government may have formulated, furnished or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document

REVIEW ACTIVITIES
ARMY – AV
NAVY – AS

FED SUP CLASS 9905

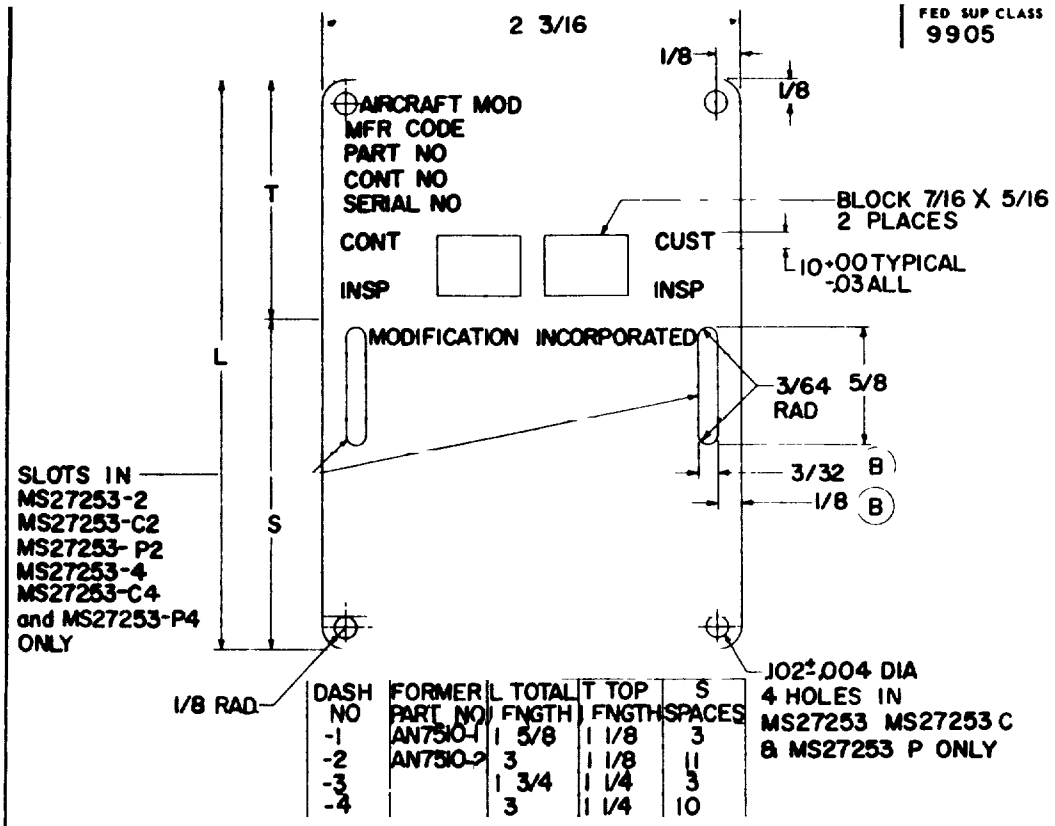

DASH NO	FORMER PART NO	L TOTAL FNGTH	T TOP FNGTH	S SPACES
-1	AN7510-1	1 5/8	1 1/8	3
-2	AN7510-2	3	1 1/8	11
-3		1 3/4	1 1/4	3
-4		3	1 1/4	10

NOTES
1 PLAIN DASH NUMBERS INDICATE ALUMINUM
ADD C BEFORE DASH NUMBER FOR CORROSION-RESISTANT STEEL
ADD F BEFORE DASH NUMBER FOR ALUMINUM FOIL DECAL
ADD P BEFORE DASH NUMBER FOR PLASTIC MATERIALS
EXAMPLES OF PART NO
MS27253 -1 - ALUMINUM PLATE, IDENTIFICATION AND MODIFICATION .032 MAX THICKNESS 1 5/8 IN TOTAL LENGTH, 1 1/8 IN TOP LENGTH 3 SPACES
MS27253-C2 CORROSION-RESISTANT STEEL PLATE IDENTIFICATION AND MODIFICATION .016 MAX THICKNESS, 3 IN TOTAL LENGTH 1 1 8 IN TOP LENGTH 11 SPACES
MS27253-F3 - ALUMINUM FOIL DECAL PLATE, IDENTIFICATION AND MODIFICATION .004 MAX THICKNESS 1 3/4 IN TOTAL LENGTH 1 1/4 IN TOP LENGTH, 3 SPACES
MS27253-P4 - PLASTIC PLATE, IDENTIFICATION AND MODIFICATION .010 MAX THICKNESS 3 IN TOTAL LENGTH, 1 1/4 IN TOP LENGTH 10 SPACES
2 MATERIALS CORROSION-RESISTANT STEEL, ANNEALED SPECIFICATION MIL-S-6721 (TI STABILIZED) OR SPECIFICATION QQ-S-766, CLASS 321, .016 MAXIMUM THICKNESS (FOR TEMPERATURES UP TO 1600°F)
ALUMINUM SPECIFICATION QQ-A-250/1C, .032 MAXIMUM THICKNESS (FOR TEMPERATURES UP TO 600°F)
ALUMINUM FOIL WITH PRESSURE SENSITIVE ADHESIVE BACKING, .004 MAXIMUM THICKNESS (FOR TEMPERATURES UP TO 200°F)
PLASTIC MATERIALS SHALL BE CLEAR MYLAR MATTE ONE SIDE, .010 MAXIMUM THICKNESS (B)
3 DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED TOLERANCES FRACTIONS± 1/16, DECIMALS ± .010 (B)
4 FOR THE LOCATION AND ATTACHMENT OF THIS PLATE, SEE SPECIFICATION MIL-P-8651
5 LETTERING SHALL BE PERMANENT AND LEGIBLE & SHALL BE STANDARD GOTHIC TYPE UNLESS OTHERWISE SPECIFIED BY THE PROCURING ACTIVITY
6 REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID
7 FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN

APPROVED 1 OCT 64 REVISED (A) 16 JULY 68 (B) 2 SEPT 71

P.A. USAF-84 (B)
Other Cust
NAVY - AS
ARMY - GL
PROCUREMENT SPECIFICATION MIL-P-6906

TITLE
PLATE, IDENTIFICATION

SUPERSEDES AN7510

MILITARY STANDARD
MS27253
SHEET 1 OF 1

DD FORM 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATE
DRAWN BY [illegible] 19 NOV 70
TYPED BY [illegible] 19 NOV 70

NOTES TO PRINTER REDUCE BORDER TO 6-27/32x9-3/4 PRINT LEFT BORDER-LINE ONE INCH FROM LEFT EDGE OF 8x10-1/2 SHEET

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:20Z
Check the source to verify that this is the current version before use.