
NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

FED. SUP CLASS.
NONE

WIRE, CHROMEL AND ALUMEL THERMOCOUPLE LEAD, SPECIFICATION MIL-W-5846 FOR 8 OHM INSTALLATION OR WIRE COPPER AND CONSTANTAN THERMOCOUPLE LEAD, SPECIFICATION MIL-W-5908 FOR 22 OHM INSTALLATION (A)

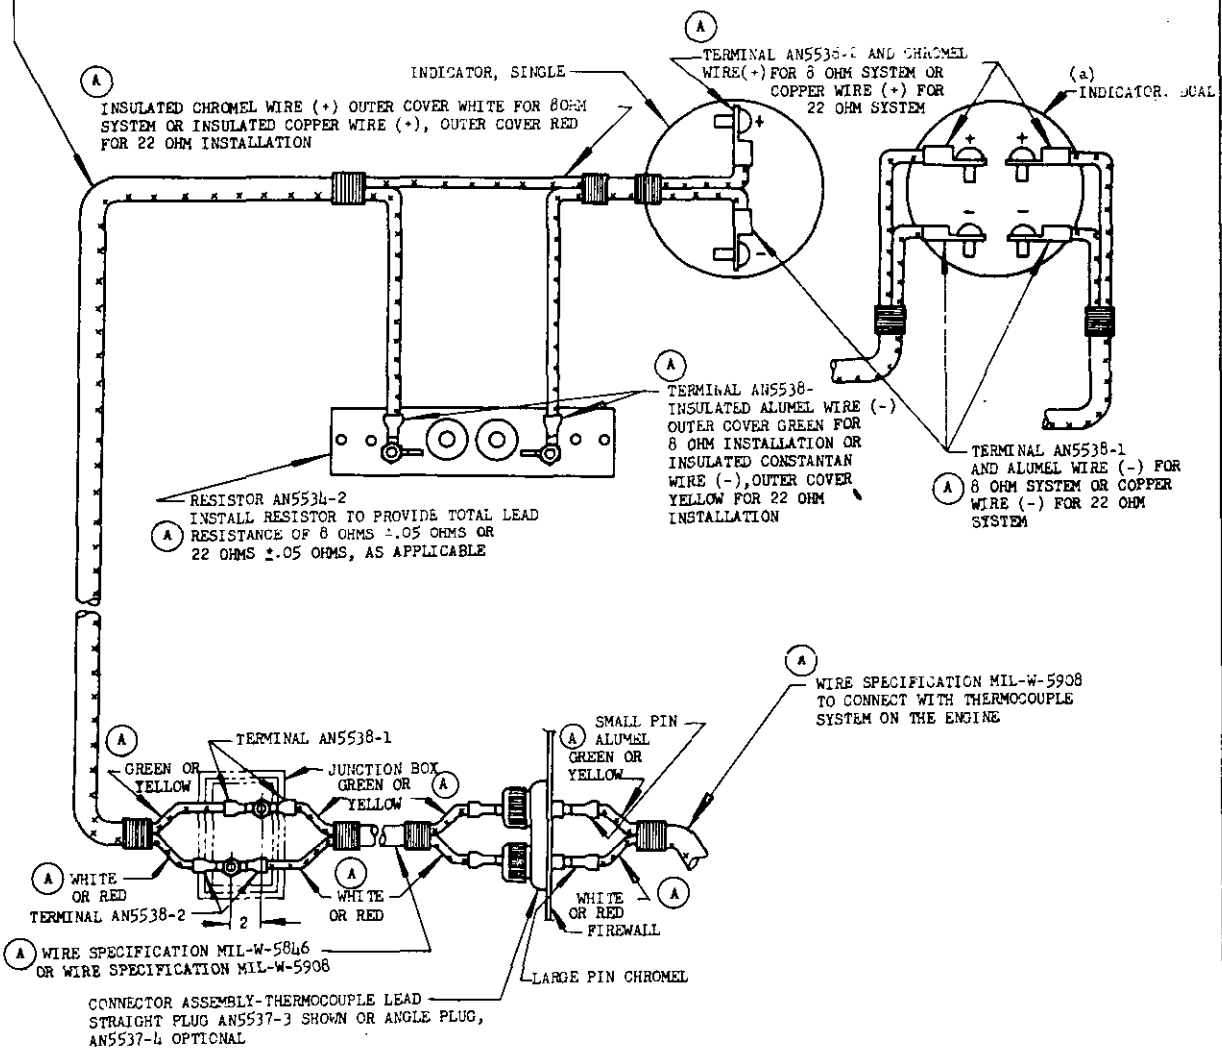

(a) DUAL INDICATOR INSTALLATION SIMILAR TO THAT SHOWN FOR THE SINGLE INDICATOR.

WHEN SOLDER TERMINALS ARE USED, SOLDERING OF WIRES TO TERMINALS SHALL BE IN ACCORDANCE WITH SPECIFICATION QQ-S-571, CLASS A FOR AN5538 TERMINALS. LUGS OF TERMINALS SHALL BE SECURELY FORMED AROUND END OF CONDUCTOR.

INSULATED ENDS SHALL BE WRAPPED .500 INCH WITH TWINE, SPECIFICATION T-T-871, OR AN APPROVED TYPE OF VARNISHED CAMBRIC. ONE COAT OF CLEAR CELLULOSE LACQUER, SPECIFICATION MIL-L-7178 SHALL BE APPLIED AFTER ASSEMBLY.

APPROVED 13 Apr 55 REVISED (A) 14 Apr 58 (B) 1 April 1976

(B) CANCELLED 1 April 1976
NO SUPERSEDING STANDARD

THIS IS A DESIGN STANDARD. NOT USED AS A PART NUMBER.

CUSTODIANS	OTHER INT.	MILITARY STANDARD	MS33560 (ASG)
Navy - BuAer Air Force	A - N - AF -	THERMOCOUPLE LEADS, CHROMEL AND ALUMEL, 8 OHM SYSTEM (A) COPPER AND CONSTANTAN, 22 OHM SYSTEM, INSTALLATION OF	
PROCUREMENT SPECIFICATION NONE		SUPERSEDES: AND10608	SHEET 1 OF 1

DD FORM 672-1
1 OCT 52

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:04Z
Check the source to verify that this is the current version before use.