
NOTICE When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specification, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

FED SUP CLASS 5935

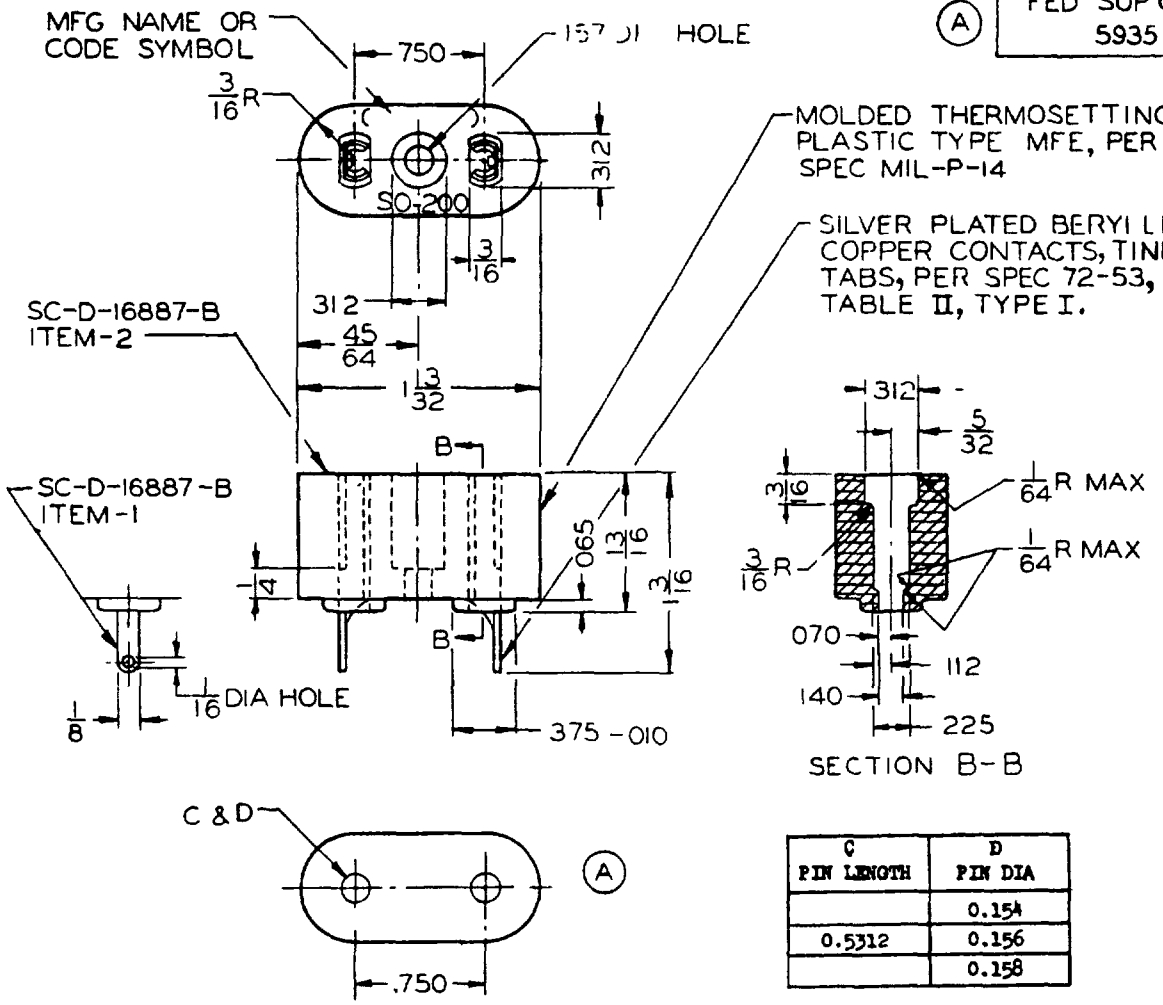

C PIN LENGTH	D PIN DIA
	0.154
0.5312	0.156
	0.158

TEST JIG CONFIGURATION

NOTES:

1. TOLERANCES ON FRACTIONAL DIMENSIONS OF SOCKET SHALL BE ±1/64, DECIMAL DIMENSIONS ±.005, UNLESS OTHERWISE SPECIFIED.
2. THE SOCKET SHALL ACCOMMODATE CRYSTAL HOLDER TYPE DC-34, ETC.
3. THE SOCKET SHALL BE MOLDED WITH THE SIGNAL CORPS TYPE NUMBER, SO-200, AND THE MANUFACTURER'S NAME OR SYMBOL.
4. REFERENCED SPECIFICATIONS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS.
5. DRAWING SC-D-16887-B AND SPECIFICATION INDICATED BELOW CONSTITUTE COMPLETE PROCUREMENT DATA.
6. INSERTION AND WITHDRAWAL FORCE (1.5 TO 4.0 LBS.) DIELECTRIC TEST (2000 VOLTS AC FOR ONE MINUTE).
7. CRYSTAL HOLDER TYPE DC-34 OR EQUAL TO BE USED AS TEST JIGS FOR SHOCK AND VIBRATION TESTS.
8. STATIC LOAD, MOISTURE RESISTANCE, AND TUMBLING NOT APPLICABLE.

(A)

(A)

DASH NO.	PIN
-1	199-4459

ALL DIMENSIONS IN INCHES

APPROVED 24 JULY 53 REVISED (A) 23 FEB 1954

CUSTODIAN
SIGNAL CORPS

PROCUREMENT SPECIFICATION
MIL-S-12883(SigC)

MILITARY STANDARD

SOCKET, CRYSTAL SO-200

MS35093 (SIG C)

SHEET 1 OF 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:09Z
Check the source to verify that this is the current version before use.