INCH-POUND


MIL-DTL-24308/9H
w/AMENDMENT 1
16 September 2014
SUPERSEDING
MIL-DTL-24308/9H
25 June 2007

DETAIL SPECIFICATION SHEET

CONNECTORS, ELECTRIC, RECTANGULAR, MINIATURE, POLARIZED SHELL, RACK AND PANEL, PLUG, PIN CONTACTS, HERMETIC, CLASSES H AND K

This specification is approved for use by all Departments and Agencies of the Department of Defense.


The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-24308.

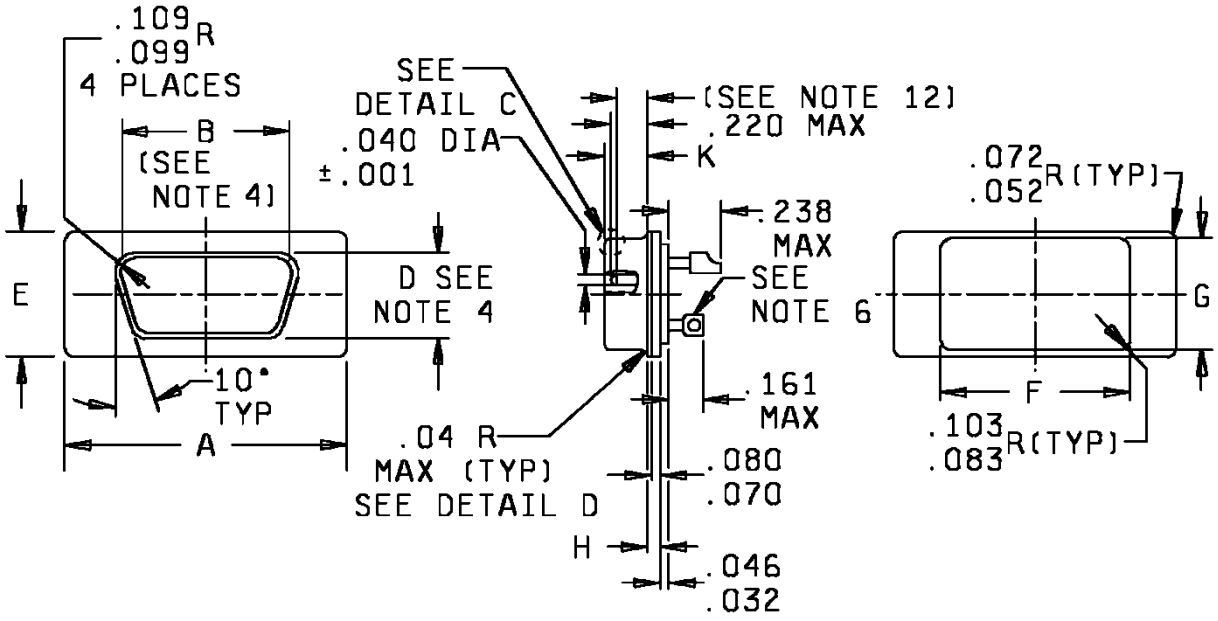

DETAIL A
Part or Identifying Number (PIN)
M24308/9-1 through 10

FIGURE 1. Shell, plug, hermetic.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:08Z
Check the source to verify that this is the current version before use.

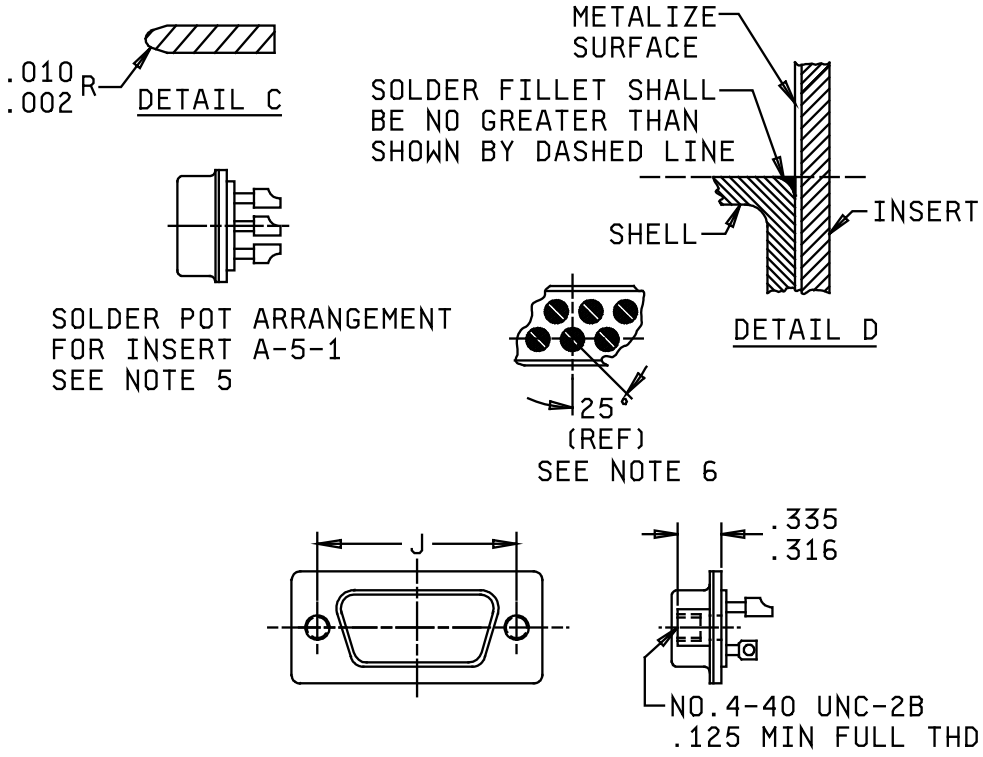

DETAIL B
WITH LOCKPOST
PINs
M24308/9-11 through -20

ALL OTHER DETAILS AND DIMENSIONS
THE SAME AS FOR DETAIL A

FIGURE 1. Shell, plug, hermetic - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:08Z
Check the source to verify that this is the current version before use.

Detail	Shell size	Dimensions								
		A	B	D	E	F	G	H	J	K
A	1	1.228 (31.19) 1.198 (30.43)	.672 (17.07) .662 (16.81)	.335 (8.51) .325 (8.26)	.508 (12.90) .488 (12.40)	.735 (18.67) .715 (18.16)	.379 (9.63) .359 (9.12)	.104 (2.64) .084 (2.13)		.241 (6.12) .229 (5.82)
	2	1.556 (39.52) 1.526 (38.76)	.998 (25.35) .988 (25.10)	.335 (8.51) .325 (8.26)	.508 (12.90) .488 (12.40)	.942 (23.93) .922 (23.42)	.379 (9.63) .359 (9.12)	.104 (2.64) .084 (2.13)		.241 (6.12) .229 (5.82)
	3	2.103 (53.42) 2.073 (52.65)	1.540 (39.12) 1.530 (38.86)	.335 (8.51) .325 (8.26)	.508 (12.90) .488 (12.40)	1.489 (37.82) 1.469 (37.31)	.379 (9.63) .359 (9.12)	.113 (2.87) .093 (2.36)		.236 (5.99) .224 (5.69)
	4	2.744 (69.70) 2.714 (68.94)	2.188 (55.58) 2.178 (55.32)	.335 (8.51) .325 (8.26)	.508 (12.90) .488 (12.40)	2.135 (54.23) 2.115 (53.72)	.379 (9.63) .359 (9.12)	.113 (2.87) .093 (2.36)		.236 (5.99) .224 (5.69)
	5	2.650 (67.31) 2.620 (66.55)	2.084 (52.93) 2.074 (52.68)	.446 (11.33) .436 (11.07)	.620 (15.75) .600 (15.24)	2.010 (51.05) 1.990 (50.55)	.510 (12.95) .490 (12.45)	.113 (2.87) .093 (2.36)		.236 (5.99) .224 (5.69)
B	1	1.228 (31.19) 1.198 (30.43)	.672 (17.07) .662 (16.81)	.335 (8.51) .325 (8.26)	.508 (12.90) .488 (12.40)	.735 (18.67) .715 (18.16)	.379 (9.63) .359 (9.12)	.104 (2.64) .084 (2.13)	.989 (25.12) .979 (24.87)	.241 (6.12) .229 (5.82)
	2	1.556 (39.52) 1.526 (38.76)	.998 (25.35) .988 (25.10)	.335 (8.51) .325 (8.26)	.508 (12.90) .488 (12.40)	.942 (23.93) .922 (23.42)	.379 (9.63) .359 (9.12)	.104 (2.64) .084 (2.13)	1.317 (33.45) 1.307 (33.20)	.241 (6.12) .229 (5.82)
	3	2.103 (53.42) 2.073 (52.65)	1.540 (39.12) 1.530 (38.86)	.335 (8.51) .325 (8.26)	.508 (12.90) .488 (12.40)	1.489 (37.82) 1.469 (37.31)	.379 (9.63) .359 (9.12)	.113 (2.87) .093 (2.36)	1.857 (47.17) 1.847 (46.91)	.236 (5.99) .224 (5.69)
	4	2.744 (69.70) 2.714 (68.94)	2.188 (55.58) 2.178 (55.32)	.335 (8.51) .325 (8.26)	.508 (12.90) .488 (12.40)	2.135 (54.23) 2.115 (53.72)	.379 (9.63) .359 (9.12)	.113 (2.87) .093 (2.36)	2.505 (63.63) 2.495 (63.37)	.236 (5.99) .224 (5.69)
	5	2.650 (67.31) 2.620 (66.55)	2.084 (52.93) 2.074 (52.68)	.441 (11.20) .431 (10.95)	.620 (15.75) .600 (15.24)	2.010 (51.05) 1.990 (50.55)	.510 (12.95) .490 (12.45)	.113 (2.87) .093 (2.36)	2.411 (61.24) 2.401 (60.99)	.236 (5.99) .224 (5.69)

FIGURE 1. Shell, plug, hermetic - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:08Z
Check the source to verify that this is the current version before use.

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are in parentheses.
3. Metric equivalents are given for information only and are based upon 1.00 inch = 25.4 mm.
4. Dimensions “B” and “D” are calculated at the start of corner radius. .04 (1.0 mm) maximums apply draft minus.
5. In insert arrangements (See MIL-DTL-24308 APPENDIX A) A-1-1, A-2-1, A-3-1, A-4-1, the contact solder pots open toward the top in the upper row and toward the bottom in the lower row. In insert A-5-1the two top rows face up and the lower row opens toward the bottom. The angular position may vary ±20° from vertical centerline.
6. Size 20 contact eyelet terminal flats are rotated 25° ±5° as shown.
7. Connector shell is solder mount type.
8. Documents shall be of the issue in effect on date of invitation for bid.
9. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
10. Patent notice. The Government has a royalty free license under the U.S. Patents listed below for the benefit of manufacturers of the items disclosed and described herein, either for the Government or for use in equipment delivered to the Government.

Patent Numbers

2790153 expires April 23, 1974
3110093 expires November 12, 1980
3158424 expires November 24, 1981

11. Copyright notice. All information disclosed in this military standard which is or may be copyrighted by ITT Cannon Electric is reproduced herein with the express permission of the copyright owner.
12. Dimensions are .155 minimum full pin diameter extension (sizes 3 through 6) and .164 minimum full pin diameter extension (sizes 1 and 2).

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.001	0.03	.052	1.32	.103	2.62	.220	5.59
.002	0.05	.070	1.78	.109	2.77	.238	6.05
.010	0.25	.072	1.83	.125	3.18	.316	8.03
.032	0.81	.080	2.03	.155	3.94	.335	8.51
.040	1.02	.083	2.11	.161	4.09		
.046	1.17	.090	2.29	.164	4.17		

FIGURE 1. Shell, plug, hermetic - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:08Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

The connectors shall conform to the design standards indicated in table I.

TABLE I. Design standards. 1/

Part or Identifying Number (PIN) class H	PIN class K	Shell size	Shell Detail (See figure 1)	Insert Arrangement reference number 2/	Contact terminals 3/	
					Solder cup	Eyelet
M24308/9-1	M24308/9-21	1	A	A-1-1	B-4	
M24308/9-2	M24308/9-22	2	A	A-2-1	B-4	
M24308/9-3	M24308/9-23	3	A	A-3-1	B-4	
M24308/9-4	M24308/9-24	4	A	A-4-1	B-4	
M24308/9-5	M24308/9-25	5	A	A-5-1	B-4	
M24308/9-6	M24308/9-26	1	A	A-1-1		B-3
M24308/9-7	M24308/9-27	2	A	A-2-1		B-3
M24308/9-8	M24308/9-28	3	A	A-3-1		B-3
M24308/9-9	M24308/9-29	4	A	A-4-1		B-3
M24308/9-10	M24308/9-30	5	A	A-5-1		B-3
M24308/9-11	M24308/9-31	1	B	A-1-1	B-4	
M24308/9-12	M24308/9-32	2	B	A-2-1	B-4	
M24308/9-13	M24308/9-33	3	B	A-3-1	B-4	
M24308/9-14	M24308/9-34	4	B	A-4-1	B-4	
M24308/9-15	M24308/9-35	5	B	A-5-1	B-4	
M24308/9-16	M24308/9-36	1	B	A-1-1		B-3
M24308/9-17	M24308/9-37	2	B	A-2-1		B-3
M24308/9-18	M24308/9-38	3	B	A-3-1		B-3
M24308/9-19	M24308/9-39	4	B	A-4-1		B-3
M24308/9-20	M24308/9-40	5	B	A-5-1		B-3

1/ These connectors mate with connectors specified in MIL-DTL-24308/1, /2, and /23.
2/ For insert arrangement see MIL-DTL-24308 Appendix A.
3/ For contacts see MIL-DTL-24308 Appendix B.

Supersession data: See table II.

TABLE II. Shell supersession data.

Shell detail (see figure 1)	Superseded MS sheet
Detail A	MS18272-1 through -5
Detail B	MS18272-6 through -10

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:08Z
Check the source to verify that this is the current version before use.

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents. In addition to MIL-DTL-24308, this document references the following:

MIL-DTL-24308/1
MIL-DTL-24308/2
MIL-DTL-24308/23

PIN: Consists of the letter M, the basic number of the specification sheet, and a dash number compiled from the code.

PIN example: M24308/9 -10

Specification sheet number

Data sheet number from table I

Finish: For class H: Class H connectors have a tin finish, no suffix is required.
For class K: Class K connectors have a nickel finish, no suffix is required.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 85
NASA - NA
DLA - CC

Preparing activity:
DLA - CC

(Project: 5935-2014-096)

Review activities:
Army - AV, AT, CR4, MI
Navy - AS, CG, MC, SH
Air Force – 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:08Z
Check the source to verify that this is the current version before use.