NOT MEASUREMENT SENSITIVE


MIL-I-3949/12H
20 March 1995
SUPERSEDING
MIL-I-3949/12G
26 March 1992

MILITARY SPECIFICATION SHEET

INSIGNIA, RANK, LIEUTENANT COLONEL AND MAJOR, ARMY AND AIR FORCE

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-I-3949.

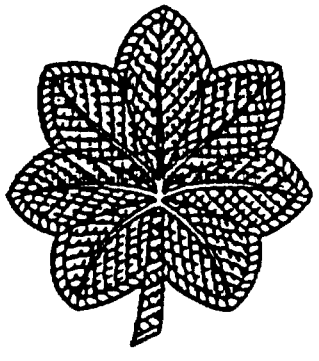

MATERIAL:

-1,-2: Red Brass or Nickel Silver
-3,-4: Red Brass
-5,-6: Red Brass or Zinc Aluminum

DASH NO:

-1: Lieutenant Colonel, Regular Size
-2: Lieutenant Colonel, Miniature Size (AF)
-3: Major, Regular Size
-4: Major, Miniature Size (AF)
-5: Lieutenant Colonel, Regular Size, Subdued
-6: Major, Regular Size, Subdued

DIMENSIONS:

HEIGHT (Overall):
-1,-3,-5,-6: 1-1/8 inches (2.86 cm) (REF)
-2,-4: 23/32 inch (1.83 cm) (REF)

WIDTH (Overall):
-1,-3,-5,-6: 1 inch (2.54 cm) (REF)
-2,-4: 11/16 inch (2.75 cm) (REF)

THICKNESS (Overall):
-1,-3,-5,-6: 0.150 inch ± 0.010 inch (0.381 cm ± 0.025 cm)
-2,-4: 0.096 inch ± 0.005 inch (0.243 cm ± 0.012 cm)

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T02:45Z
Check the source to verify that this is the current version before use.

FINISH:

-1,-2: Nickel Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 18.
-3,-4: Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 8.
-5: Dull Flat Black Baked Enamel.
-6: Dull Flat Brown Baked Enamel.

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Attaching device shall be prong and clutch type. Prongs shall be located on the vertical center line, equidistant from each end and the following distance apart:

-1,-3,-5,-6: 7/8 inch ± 1/64 inch (2.22 cm ± 0.04 cm)
-2,-4: 19/32 inch ± 1/64 inch (1.51 cm ± 0.04 cm)

3. A forcer may be used to bring up the design for Dash No. -2, -3, -5 and -6. There shall be a minimum thickness of 0.085 inch ± 0.005 inch (0.215 cm ± 0.012 cm) at the high point of the forced area.

4. The dull flat enamel for Dash No. -5 and -6 shall match the chip numbers of FED-STD-595 listed below:

COLOR	CHIP NUMBER
Black	37038
Brown	20095

5. Dash No. -3 and -4 may be manufactured using 22 karat gold plate with nickel underplating, matte finish with polished highlights and shall match TIOH Metal Finish Chip Number 11 for commercial sale only.

Custodians:
Army - IH
Air Force - 45

Review activities:
Air Force - 32, 82,99
DLA - CT

Preparing activity:
Army - IH

(Project No. 8455-0792)

Source: https://assist.dla.mil - Downloaded: 2026-10-17T02:45Z
Check the source to verify that this is the current version before use.