NOT MEASUREMENT SENSITIVE


MIL-I-3949/14J
20 March 1995
SUPERSEDING
MIL-I-3949/14H
29 November 1991

MILITARY SPECIFICATION SHEET

INSIGNIA, RANK, CAPTAIN, ARMY AND AIR FORCE

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-I-3949.

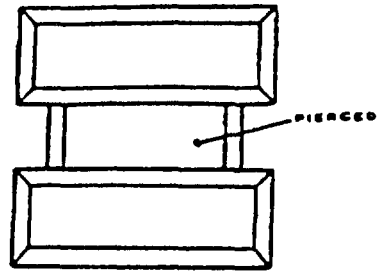

MATERIAL:
-1,-2: Red Brass or Nickel Silver
-3: Red Brass Silver

DASH NO.
-1: Regular Size
-2: Miniature Size (AF)
-3: Regular Size, Subdued

DIMENSIONS:
HEIGHT (Overall):
-1,-3: 1 inch (2.54 cm) (REF)
-2: 3/4 inch (1.91 cm) (REF)
WIDTH (Overall):
-1,-3: 1 inch (2.54 cm) (REF)
-2: 3/4 inch (1.91 cm) (REF)
THICKNESS (Overall):
-1,-3: 0.065 inch ± 0.005 inch (0.165 cm ± 0.012 cm)
-2: 0.050 inch ± 0.005 inch (0.127 cm ± 0.012 cm)

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T02:46Z
Check the source to verify that this is the current version before use.

FINISH:

-1,-2: Nickel Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 16.

-3: Dull Flat Black Baked Enamel.

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Attaching device shall be prong and clutch type. One prong shall be centered on the back of each bar.

3. Miniature insignia shall be dapped in the horizontal plane along a 2-1/2 inch ± 1/64 inch (6.35 cm ± 0.04 cm) radius. The dap for regular size insignia is built into the Government furnished hub.

4. The dull flat black enamel for Dash No. -3 shall match FED-STD-595, Chip No. 37038.

5. Dash No. -1 and -2 may be rhodium plated with a mirror-like polished finish at the option of the manufacturer.

6. A forcer may be used to bring up the design for Dash No. -1 and -3. There shall be a thickness of 0.065 inch ± 0.005 inch (0.165 cm ± 0.012 cm) from the edge and high point of the bevel.

Custodians:
Army - IH
Air Force - 45

Review activities:
Air Force - 32, 82,99
DLA - CT

Preparing activity:
Army - IH

(Project No. 8455-0792)

Source: https://assist.dla.mil - Downloaded: 2026-10-17T02:46Z
Check the source to verify that this is the current version before use.