NOT MEASUREMENT SENSITIVE


MIL-I-3949/16F
14 September 1990
SUPERSEDING
MIL-I-3949/16E
28 January 1986

MILITARY SPECIFICATION SHEET

INSIGNIA, RANK; FIRST LIEUTENANT AND SECOND LIEUTENANT, ARMY AND AIR FORCE

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-I-3949.

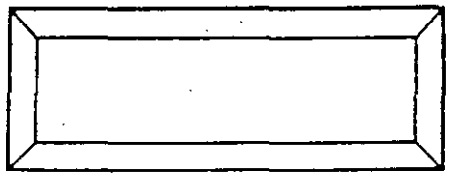

MATERIAL:
- -1,-2: Red brass or nickel silver.
- -3,-4: Red brass.
- -5,-6: Red brass.

DASH NO:
- -1: First Lieutenant, Regular Size
- -2: First Lieutenant, Miniature Size (AF)
- -3: Second Lieutenant, Regular Size
- -4: Second Lieutenant, Miniature Size (AF)
- -5: First Lieutenant, Regular Size, Subdued (A)
- -6: Second Lieutenant, Regular Size, Subdued (A)

DIMENSIONS:

HEIGHT (Overall):
- -1,-3,-5,-6: 3/8 inch (0.95 cm) (REF)
- -2,-4: 1/4 inch (0.64 cm) (REF)

WIDTH (Overall):
- -1,-3,-5,-6: 1 inch (2.54 cm) (REF)
- -2,-4: 3/4 inch (1.91 cm) (REF)

THICKNESS (Overall):
- -1,-3,-5,-6: .070 inch ± .005 inch (0.177 cm ± 0.012 cm)
- -2,-4: .055 inch ± .005 inch (0.139 cm ± 0.012 cm)

FINISH:
- -1,-2: Nickel plated, mirror-like polished finish.
- -3,-4: Gold plated, mirror-like polished finish.
- -5: Dull flat black baked enamel finish.
- -6: Dull flat brown baked enamel finish.

NOTES:
1. Attaching device shall be prong and clutch type. Prongs shall be located on the horizontal centerline, equidistance from each end and the following distance apart:

   -1,-3,-5,-6: 13/16 inch ± 1/64 inch (2.06 cm ± 0.04 cm)
   -2,-4: 9/16 inch ± 1/64 inch (1.43 cm ± 0.04 cm)

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T02:46Z
Check the source to verify that this is the current version before use.

2. Miniature insignia shall be dapped in the horizontal plane along a 2-1/2 inch (6.35 cm) radius. The dap for regular size insignia is built into the Government furnished hub.
3. The enamel for Dash No. 5 and 6 shall match the chip numbers of FED-STD 595 listed below:

COLOR	CHIP NUMBER
Black	37038
Brown	20095

4. Dash no 1 and 2 may be rhodium plated with a mirror-like polished finish at the option of manufacturer.

Custodians:
Army - IH
Air Force - 11

Review activities:
Air Force - 82,99
DLA - CT

Preparing activity:
Army - IH

(Project No. 8455-0541)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T02:46Z
Check the source to verify that this is the current version before use.