NOT MEASUREMENT SENSITIVE

MIL-I-3949/20D
14 September 1990
SUPERSEDING
MIL-I-3949/20C
31 December 1971

MILITARY SPECIFICATION SHEET

INSIGNIA, RANK; CHIEF WARRANT OFFICERS W-2 AND W-4, AIR FORCE

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-I-3949.

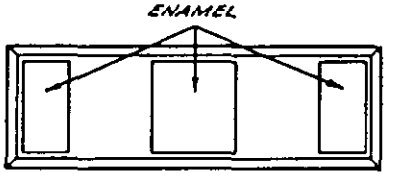

MATERIAL: Gilding metal

DIMENSIONS:
- HEIGHT (Overall):
  - -1,-3: 3/8 inch (0.95 cm) (REF)
  - -2,-4: 1/4 inch (0.64 cm) (REF)
- WIDTH (Overall):
  - -1,-3: 1-1/8 inch (2.86 cm) (REF)
  - -2,-4: 3/4 inch (1.91 cm) (REF)
- THICKNESS: .065 inch ± .005 (0.165 ± 0.012 cm)

DASH NO:
- -1: Chief Warrant Officer W-4 Regular Size
- -2: Chief Warrant Officer W-4 Miniature Size
- -3: Chief Warrant Officer W-2 Regular Size
- -4: Chief Warrant Officer W-2 Miniature Size

FINISH:
- -1,-2: Hard enameled, nickel plated, mirror-like polished finish.
- -3,-4: Hard enameled, gold plated, mirror-like polished finish.

NOTES:
1. Attaching device shall be prong and clutch type. Prongs shall be located on the horizontal centerline, equidistance from each end and the following distance apart:

   -1,-3: 7/8 inch ± 1/64 inch (2.22 cm ± 0.04 cm)
   -2,-4: 5/8 inch ± 1/64 inch (1.59 cm ± 0.04 cm)

2. Enamel areas shall be as indicated. The color shall conform to TIOH chip number Blue 30 or the standard sample.

3. Regular size badges shall be dapped along a 5 inch (12.7 cm) radius on the horizontal plane. Miniature size badges shall be flat.

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-17T02:47Z
Check the source to verify that this is the current version before use.

4. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of manufacturer. Epoxy resin shall be a stoning epoxy, have a shore D hardness of 85, and incorporate an ultraviolet inhibitor.
5. Insignia may be rhodium plated with a mirror-like polished finished at the option of manufacturer.

Custodians:
Army - IH
Air Force - 11

Review activities:
Air Force 82,99
DLA - CT

Preparing activity:
Army - IH

(Project No. 8455-0541)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T02:47Z
Check the source to verify that this is the current version before use.