NOT MEASUREMENT SENSITIVE


MIL-I-3949/24E
14 September 1990
SUPERSEDING
MIL-I-3949/24D
28 January 1986

MILITARY SPECIFICATION SHEET

INSIGNIA, RANK; WARRANT OFFICER WO1 AND CHIEF WARRANT OFFICERS CW2, CW3 AND CW4, ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-I-3949.

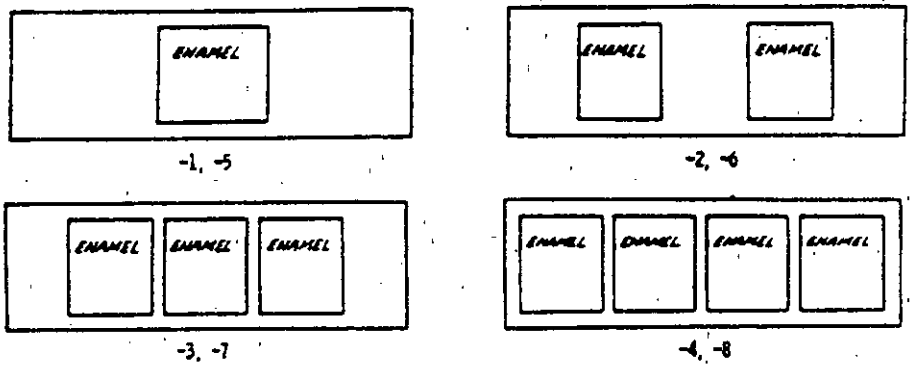

MATERIAL:
-1,-2,-3,-4: Gilding metal
-5,-6,-7,-8: Red brass

DIMENSIONS:
HEIGHT (Overall): 3/8 inch (0.95 cm) (REF)
WIDTH (Overall): 1-1/8 inches (2.86 cm) (REF)
THICKNESS: .065 inch ± .005 inch (0.165 cm ± 0.012 cm)

FINISH:
-1,-2,-3,-4: Hard enameled, nickel plated, mirror-like polished.
-5,-6,-7,-8: Dull flat olive drab enamel finish with the area indicated as enameled to dull flat black baked enamel.

DASH NO:
-1: Warrant Officer WO1
-2: Chief Warrant Officer CW2
-3: Chief Warrant Officer CW3
-4: Chief Warrant Officer CW4
-5: Warrant Officer WO1 Subdued
-6: Chief Warrant Officer CW2 Subdued
-7: Chief Warrant Officer CW3 Subdued
-8: Chief Warrant Officer CW4 Subdued

NOTES:
1. Attaching device shall be prong and clutch type. Prongs shall be located on the horizontal centerline, equidistance from each end and 7/8 inch ± 1/64 inch (2.22 cm ± 0.04 cm) apart.
2. Enamel areas for Dash No. 1 thru 4 shall be as indicated. The color shall conform to TIOH chip number black 26 or the standard sample.
3. The enamel for Dash No. 5 thru 8 shall match the chip numbers of FED-STD 595 listed below.

COLOR	CHIP NO.
Black	37038
Green (Olive Drab)	34096

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-01-17T02:47Z
Check the source to verify that this is the current version before use.

4. The insignia shall be dapped along a 5 inch (12.7 cm) on the horizontal plane.

5. Epxoy resin (stoning epoxy) may be used in lieu of hard enamel at the option of manufacturer. Epoxy resin shall be a stoning epoxy, have a shore D hardness of 85, and incorporate an ultraviolet inhibitor.
6. Dash no. 1, 2, 3 and 4 may be rhodium plated with a mirror-like polished finish at the option of manufacturer.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-0541)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T02:47Z
Check the source to verify that this is the current version before use.