NOT MEASUREMENT SENSITIVE


MIL-I-3949/28D
24 June 1992
SUPERSEDING
MIL-I-3949/28C
14 September 1990

MILITARY SPECIFICATION SHEET

INSIGNIA, RANK; CHIEF WARRANT OFFICER CW5, ARMY AND AIR FORCE

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-I-3949.

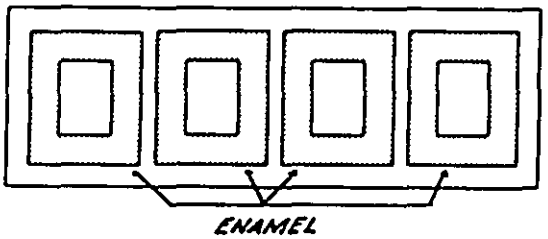

MATERIAL:
-1, -3: Gilding Metal
-2: Red Brass

DASH NO.
-1: Regular, Army
-2: Subdued, Army
-3: Regular, Air Force

DIMENSIONS:
HEIGHT (Overall): 3/8 inch (0.95 cm) (REF)
WIDTH (Overall): 1-1/8 inches (2.86 cm) (REF)
THICKNESS: 0.065 inch ± .005 inch (0.165 cm ± 0.012 cm)

FINISH:
-1: Hard enameled, nickel plated, mirror-like polished.
-2: Dull flat olive drab enamel finish with the area indicated as enameled to be dull flat black baked enamel.
-3: Hard enameled, nickel plated, mirror-like polished.

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T02:48Z
Check the source to verify that this is the current version before use.

NOTES:

1. The attaching device shall be prong and clutch type. Prongs shall be located on the horizontal center line, equidistant from each end and 7/8 inch ± 1/64 inch (2.22 cm ± 0.04 cm) apart.

2. Enamel areas shall be as indicated.

3. The color for Dash No. 1 shall be black and conform to TIOH chip number 26 or the standard sample.

4. The color for Dash No. 3 shall be Light Blue and conform to TIOH chip number 30 or the standard sample.

5. The enamel for Dash No. 2 shall match the chip numbers of FED-STD-595 listed below.

COLOR	CHIP NO.
Black	37038
Green (Olive Drab)	34096

6. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer. Epoxy resin shall be a stoning epoxy, have a shore D hardness of 85 and incorporate an ultraviolet inhibitor.

7. The Full size insignia shall be dapped on the horizontal plane to a 5 inch (12.7 cm) radius.

8. The term (REF) refers to measurements taken from the Government furnished hub or die.

9. Dash No. 1 shall also be used for the Army Master Warrant Officer MW4 insignia until no longer required.

Custodians:
Army - IH
Air Force - 11

Review activities:
Air Force - 82,99
DLA - CT

User activities:
Air Force - 45

Preparing activity:
Army - IH

(Project No. 8455-0673)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T02:48Z
Check the source to verify that this is the current version before use.