NOT MEASUREMENT SENSITIVE


MIL-I-3949/3D
26 March 1992
SUPERSEDING
MIL-I-3949/3C
14 September 1990

MILITARY SPECIFICATION SHEET

INSIGNIA, RANK; GENERAL OF THE ARMY AND GENERAL OF THE AIR FORCE COAT OF ARMS

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (*DODISS*) specified in the solicitation: MIL-I-3949.

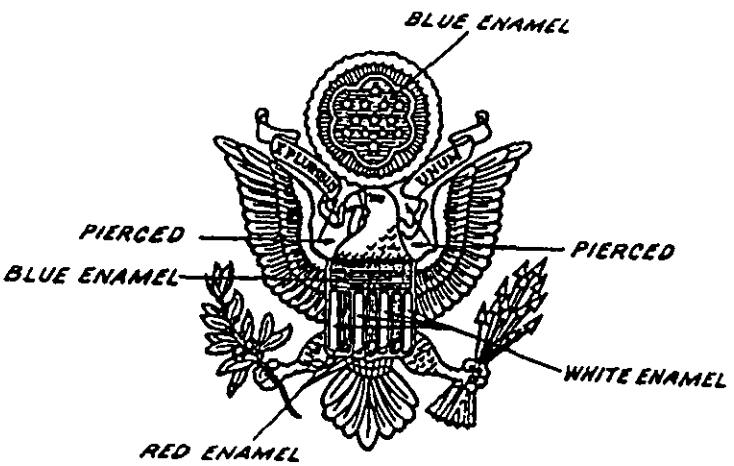

MATERIAL: Gilding Metal

DIMENSIONS:

HEIGHT (Overall): 7/8 inch (2.22 cm) (REF)

WIDTH (Overall): 3/4 inch (1.91 cm) (REF)

THICKNESS (On shield): 0.070 inch ± 0.005 inch (0.177 cm ± 0.012 cm)

FINISH: Hard enameled, gold plated, matte finish, polished highlights

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T02:43Z
Check the source to verify that this is the current version before use.

NOTES:

1. Piercing shall be as indicated.

2. The attaching device shall be prong and clutch type. Prongs shall be located on the vertical center line, equidistant from each end and 5/8 inch ± 1/32 inch (1.59 cm ± 0.08 cm apart.

3. The enamel shall be as indicated. the color shall conform to the TIOH chip numbers listed below or the standard sample.

COLOR	CHIP NUMBER
Blue	18
Red	1
White	28

4. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer. Epoxy resin shall be a stoning epoxy, have a shore D hardness of 85, and incorporate an ultraviolet inhibitor.

5. The insignia may be manufactured using 22 karat gold plate with nickel underplating for commercial sale only.

Custodians:
Army - IH
Air Force - 11

Review activities:
Air Force - 82,99
DLA - CT

Preparing activity:
Army - IH

(Project No. 8455-0656)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T02:43Z
Check the source to verify that this is the current version before use.