
MIL-I-3949 / 9D
12 MARCH 1981
SUPERSEDING
MIL-I-3949/9C
14 January 1980

MILITARY SPECIFICATION SHEET

INSIGNIA, RANK; GENERAL OFFICERS, ARMY AND AIR FORCE (MINIATURE SIZE)

This specification is approved for use by all Departments and Agencies of the Department of Defense. The complete requirements for procuring the item(s) described herein shall consist of this document and the issue in effect of Specification MIL-I-3949.

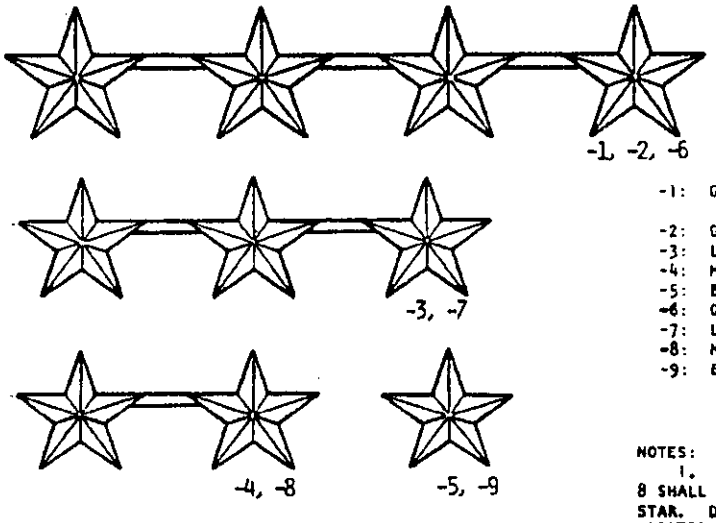

DASH NO.

-1: General, Army and Air Force (Flight Caps only)
-2: General, Air Force
-3: Lt. General, Army and Air Force
-4: Major General, Army and Air Force
-5: Brigadier General, Army and Air Force
-6: General, Army (Subdued)
-7: Lt. General, Army (Subdued)
-8: Major General, Army (Subdued)
-9: Brigadier General, Army (Subdued)

MATERIAL:
-1 thru -5: RED BRASS
-6 thru -9: RED BRASS OR ALUMINUM

DIMENSIONS (INCHES):
WIDTH (OVERALL):
-1, -6: 2-7/8 ± 1/64
-2: 1-7/8 ± 1/64
-3, -7: 2-1/8 ± 1/64
-4, -8: 1-3/8 ± 1/64
-5, -9: 5/8 (REF)
CIRCUMSCRIBED DIAMETER OF STAR:
-1, -3 thru -9: 5/8 (REF)
-2: 3/8 (REF)
THICKNESS (STAR OVERALL):
-1, -3 thru -9: .130 ± .010
-2: .110 ± .005

FINISH:
-1 thru -5: NICKEL PLATED, RHODIUM PLATED, MIRROR-LIKE POLISHED
-6 thru -9: DULL FLAT BLACK BAKED ENAMEL OR ANODIZED AND DYED, AS APPLICABLE

NOTES:

1. PRONGS FOR DASH NOS. 1 thru 4 AND 6 thru 8 SHALL BE CENTERED ON THE BACK OF THE OUTSIDE STAR. DASH NO. 9 SHALL HAVE A REGISTERING PRONG LOCATED ON THE VERTICAL CENTERLINE 1/8 ± 1/64 INCH BELOW THE TIP OF THE STAR POINT AND A REGULAR PRONG LOCATED ON A LOWER STAR LEG 1/8 ± 1/64 INCH FROM THE LOWER TIP.

2. THE CONNECTING BAR SHALL BE 1/16, - 0, + 1/64 INCH WIDE BY 1/16, - 0, + 1/64 INCH THICK. FOR DASH NOS. 1,3,4,6,7 AND 8, THE STARS SHALL BE SOLDERED TO THE CONNECTING BAR 3/4 ± 1/64 INCH ON CENTERS. FOR DASH NO. 2, THE STARS SHALL BE SOLDERED TO THE CONNECTING BAR 1/2 ± 1/64 INCH ON CENTERS.

3. DASH NOS. 1 thru 4, 6 thru 8 MAY BE ONE PIECE CONSTRUCTION, PROVIDED THE CONNECTING BAR IS A MINIMUM OF .060 INCH THICK.

4. THE INSIGNIA MAY BE MADE FROM STERLING SILVER FOR COMMERCIAL SALE, AND IF SO THE THICKNESS DIMENSIONS GIVEN SHALL BE USED FOR REFERENCE ONLY AND THE WEIGHTS LISTED BELOW SHALL GOVERN. THE FINISH FOR STERLING SILVER INSIGNIA SHALL BE A RHODIUM PLATED, MIRROR-LIKE POLISH. AN UNDERCOATING OF NICKEL WILL BE PERMITTED.

WEIGHT (MIN)	-1:	100 GRAINS	-4:	50 GRAINS
	-2:	65 GRAINS	-5:	19 GRAINS
	-3:	78 GRAINS		

5. PRONGS FOR DASH NO. 5 SHALL BE LOCATED ON A HORIZONTAL LINE 1/4 INCH BELOW THE STAR POINT AND 3/8, +1/64, -0 INCH ON CENTERS. THE TWO REGULAR PRONGS SHALL HAVE 3/8 INCH DIAMETER CLUTCHES.

	CUSTODIANS:	REVIEW ACTIVITIES:	USER ACTIVITIES:
ARMY	IH		
AIR FORCE	45	99	
DLA		CT	

PREPARING ACTIVITY:

THE INSTITUTE OF HERALDRY,
UNITED STATES ARMY

Project No. 8455-0939

FSC 8455

☆U.S. GOVERNMENT PRINTING OFFICE: 1981 — 703-023/1790

Source: https://assist.dla.mil -- Downloaded: 20261O-17T02:45Z
Check the source to verify that this is the current version before use.