NOT MEASUREMENT SENSITIVE


MIL-I-3949/9E
14 September 1990
SUPERSEDING
MIL-I-3949/9D
12 March 1981

MILITARY SPECIFICATION SHEET

INSIGNIA, RANK; GENERAL OFFICERS, ARMY AND AIR FORCE (MINIATURE SIZE)

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-I-3949.

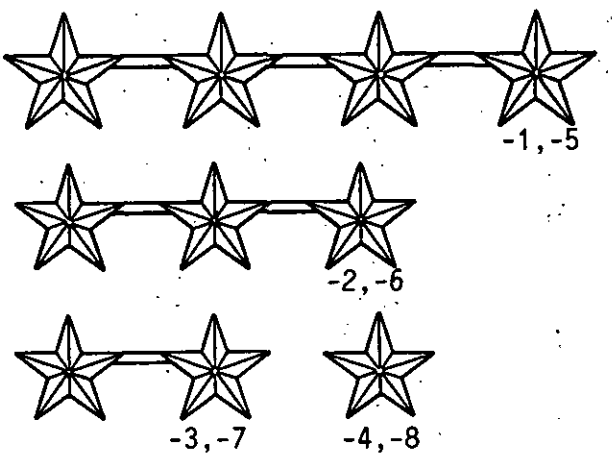

MATERIAL:
-1 thru -4: Red brass or nickel silver
-5 thru -8: Red brass

DIMENSIONS:
WIDTH (Overall):
-1,-5: 2-7/8 inches (7.30 cm) (REF)
-2,-6: 2-1/8 inches (4.40 cm) (REF)
-3,-7: 1-3/8 inches (3.49 cm) (REF)
-4,-8: 5/8 inch (1.59 cm) (REF)
CIRCUMSCRIBED DIAMETER OF STAR: 5/8 inch (1.59 cm) (REF)
THICKNESS: .130 inch ± .010 inch (0.330 cm ± 0.025 cm)

DASH NO:
-1: General
-2: Lt. General
-3: Major General
-4: Brigadier General
-5: General (A) Subdued
-6: Lt. General (A) Subdued
-7: Major General (A) Subdued
-8: Brigadier General (A) Subdued

FINISH:
-1 thru -4: Nickel plated, mirror-like polished finish.
-5 thru -8: Dull flat black baked enamel.

NOTES:
1. Attaching device shall be prong and clutch type as follows:
   a. The standard prongs and clutches shall be used for Dash No. 1, 2, 3, 5, 6, and 7 with the prongs centered on the outside star.
   b. The attaching device for Dash No. 4 and 8 shall be two prongs and clutches. The standard prongs shall be located on a horizontal line 1/4 inch ± 1/64 inch (0.64 cm ± 0.04 cm) below the star point and 3/8 inch ± 1/64 inch -0 (0.95 cm + 0.04 cm -0) apart. The clutches shall be 3/8 inch ± 1/64 inch (0.95 cm ± 0.04 cm) in diameter.

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T02:45Z
Check the source to verify that this is the current version before use.

2. The connecting bar shall be 1/16 inch + 1/64 inch -0 (0.16 cm + 0.04 cm -0) wide by 1/16 inch + 1/64 inch -0 (0.16 cm + 0.04 cm -0) thick. The stars shall be soldered to the connecting bar 3/4 inch ± 1/64 inch (1.91 cm ± 0.04 cm) on centers.
3. Insignia may be one piece construction provided the connecting bar is a minimum of .060 inch (0.152 cm) thick.
4. The enamel for Dash No. 5, 6, 7 and 8 shall match black chip number 37038 of FED-STD 595.
5. Dash No. 1, 2, 3 and 4 may be rhodium plated with a mirror-like polished finish at the option of manufacturer.

Custodians:
Army - IH
Air Force - 11

Review activities:
Air Force - 82,99
DLA - CT

Preparing activity:
Army - IH

(Project No. 8455-0541)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T02:45Z
Check the source to verify that this is the current version before use.