[INCH-POUND]
A-A-52498
August 1, 1994
SUPERSEDING
MS51320B
8 September 1987

COMMERCIAL ITEM DESCRIPTION

FLOODLIGHT, ELECTRIC-24 VOLT

The General Services Administration has authorized the use of this commercial item description (CID) for all federal agencies.

1. SCOPE

This CID covers a vehicle floodlight which is controllable from outside the military vehicle. The floodlight provides localized directional illumination during night operations.

2. SALIENT CHARACTERISTICS

2.1. Materials. Unless otherwise specified herein, the materials shall be in accordance with the manufacturer's material specifications for floodlights. The use of recovered materials made in compliance with the regulatory requirements is acceptable providing all the requirements of the CID are met (see 5.4).

2.1.1 Metals. Metals shall be of corrosion resistant type or shall be treated to resist corrosion.

2.2 Design and construction. The design and construction of the floodlight shall be as specified in figure 1.

2.2.1 Housing. The floodlight housing shall be of sufficient size and mechanical strength to withstand handling, transit, storage and installation without causing malfunction or distortion.


2.2.2 Connectors. The floodlight shall be provided with two electrical connector assemblies, Army part number 8741492.

Beneficial comments, recommendations, additions, deletions clarifications, etc. and any other data which may improve this document should be sent by letter to: U.S. Army Tank-Automotive Command, ATTN: AMSTA-GLC, Warren, MI 48397-5000.

FSC 6220

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:11Z
Check the source to verify that this is the current version before use.

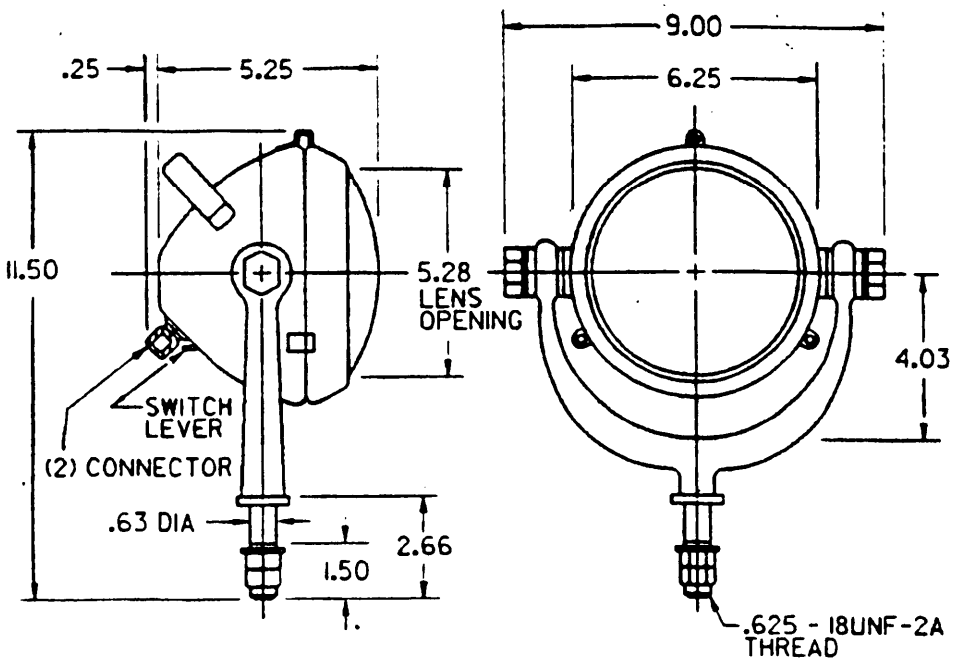

PIN Number	Former MS Part Number	Former Army Part Number
A52498-1	MS51320-1	8739551

NOTES: 1. Construction is not limited to features other than shown by dimensions, notations, and referenced documents.
2. Dimensions are in inches.

FIGURE 1. Floodlight nominal dimensions.

2.2.3 Switch. The floodlight shall be provided with a switch, as specified in Army drawing number 7414388 or a suitable interchangeable switch.

2.2.4 Adapter kit. The floodlight shall be furnished with an adapter kit as specified in Army drawing number 10944440 or a suitable interchangeable adapter kit which meets the requirements of this CID.

2.2.5 Lamp. The floodlight shall be capable of accommodating an industry number 4572, PAR 46 150 watts and 5.8 amperes lamp. The lamp shall be rated not less than 24 volts direct current (dc) and be a all glass unit sealed beam design.

2.2.6 Locking device. Lockwashers, self-locking nuts, or other commercial locking devices shall be incorporated where required to prevent loosening of components and the floodlight form its attaching parts.

2.3 Beam pattern. The floodlight shall produce a beam pattern as shown in figure 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:11Z
Check the source to verify that this is the current version before use.

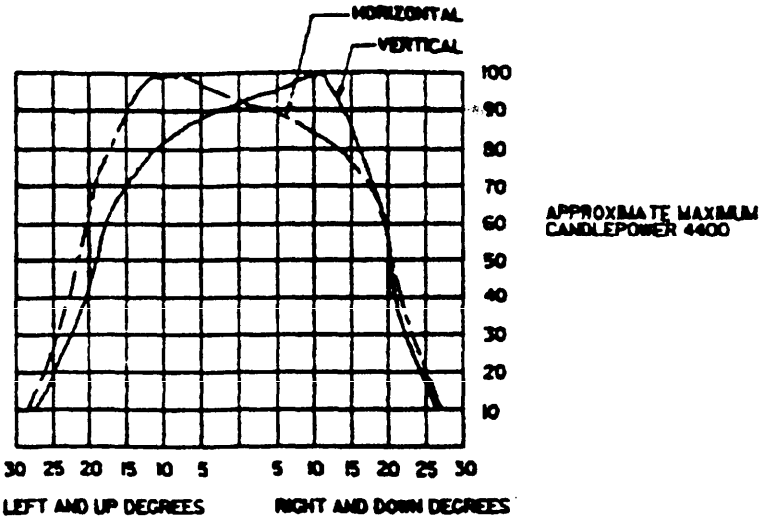


FIGURE 2. Floodlight beam pattern.

2.4 Floodlight head rotation. The floodlight shall be capable of being rotated horizontally 175 degrees to the left and to the right of the center of rotation. It shall also be vertically adjustable upward 60 degrees and downward 30 degrees. Friction washers shall be included to assure that the beam will maintain the vertical and horizontal direction selected by the operator.

2.5 Splash resistance. The floodlight shall conform to 2.3 and 2.4 after it has been subjected to a water spray of 12 hours. This shall be verified by use of SAE J575.

2.6 Salt fog. The floodlight shall not show any signs of damage after being subjected to a 5% saline atmosphere for 200 hours.

2.6.1 Switch. The switch shall be operated 1,000 times during the salt spray test, then permitted to dry for 48 hours. The switch shall then be subjected to an additional 1,000 operations at 24 volts dc. Although water may enter the floodlight, no malfunctioning of the switch shall be observed and no water shall enter the switch.

2.7 Sand, dust and vibration. The floodlight shall conform to 2.4 when subjected to the requirements in SAE J575.

2.8 Shock resistance. The floodlight shall not be damaged when exposed to three shocks in each direction applied along three mutually perpendicular axis of the test specimen (18 shocks). The test pulse shall be as specified in figure 3. The pulse shall have a duration of 6 milliseconds and a peak value of 75 times the acceleration of gravity. Lamp shall be removed prior to testing and reinstalled after test completion.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:11Z
Check the source to verify that this is the current version before use.

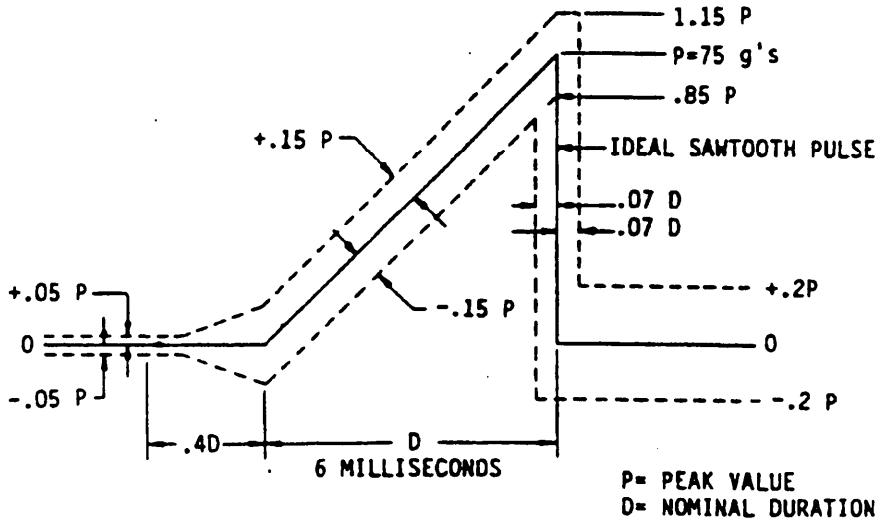


FIGURE 3. Shock pulse.

2.9 Temperature. The floodlight shall conform to 2.3 and 2.4 when operated in temperatures of -65° to +160° Fahrenheit.

2.10 Identification markings. Identification markings shall be permanent and legible and shall include, as a minimum, the manufacturer's identification code (CAGE) and part number, the part identification number PIN A52498-1, and the words "24 Volt" and "U.S.".

2.11 Installation. Each floodlight shall be furnished with complete instructions covering its installation.

2.12 Finish treatment. Cleaning, pretreating, priming and painting of the floodlight shall conform to an appropriate CARC paint system selected from Army drawing number 12369000 for external application. Unless otherwise specified (see 5.2), the color of the paint final top coat shall be green number 383.

3. QUALITY ASSURANCE PROVISIONS

3.1 Responsibility for inspection. The contractor is responsible for the performance of all inspections (examinations and tests).

3.2 Contractor certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this commercial item description and that the product conforms to the producer's own drawings, specifications, workmanship standards, and quality assurance practices. Items with known defects shall not be submitted for Government acceptance. The Government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:11Z
Check the source to verify that this is the current version before use.

4. PRESERVATION, PACKAGING, PACKING, LABELING, AND MARKING

Preservation, packaging, packing, labeling, and marking shall be as specified in the contract or order (see 5.2).

5. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

5.1. Addresses for obtaining copies of referenced documents.

5.1.1 Army drawings. Copies of Army drawings 10944440 "Kit, Adapter, Floodlight", 8741492 "Connector Assembly", 7414388 "Switch Housing Assembly", and 12369000 "Chemical Agent Resistant Coatings (CARC) Paint Systems Index" are available from the U.S. Army Tank-Automotive Command, Warren, MI 48397-5000.

5.1.2 Non-Government publications. Copies of SAE J575 "Test for Motor Vehicle Lighting Devices, Recommended Practices" are available from the Society of Automotive Engineers, Inc. (SAE), 400 Commonwealth Drive, Warrendale, PA 15096-0001.

5.2 Ordering data. Acquisition documents must specify the following:

a. Title, number, and date of this CID.
b. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced.
c. PIN number and quantity required.
d. Final top coat color of paint, if other than specified.
e. Selection of applicable level and packaging requirements.

5.3 Cross-reference data. Floodlights conforming to this CID are interchangeable/substitutable with floodlights conforming to MS51320B.

5.4 Regulatory requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practicable.

MILITARY INTERESTS:

Custodians
Army - AT
Air Force - 99

Review Activities
Air Force - 82
DLA - GS

CIVIL AGENCY COORDINATING ACTIVITY:
GSA - FSS

PREPARING ACTIVITY:
Army - AT

(Project 6220-1068)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:11Z
Check the source to verify that this is the current version before use.