MILITARY SPECIFICATION SHEET

VALVE, SELECTOR, MANUALLY OPERATED

This specification is approved for use within the Army Missile Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the valve described herein shall consist of this specification and the latest issue of MIL-V-47322(MI).

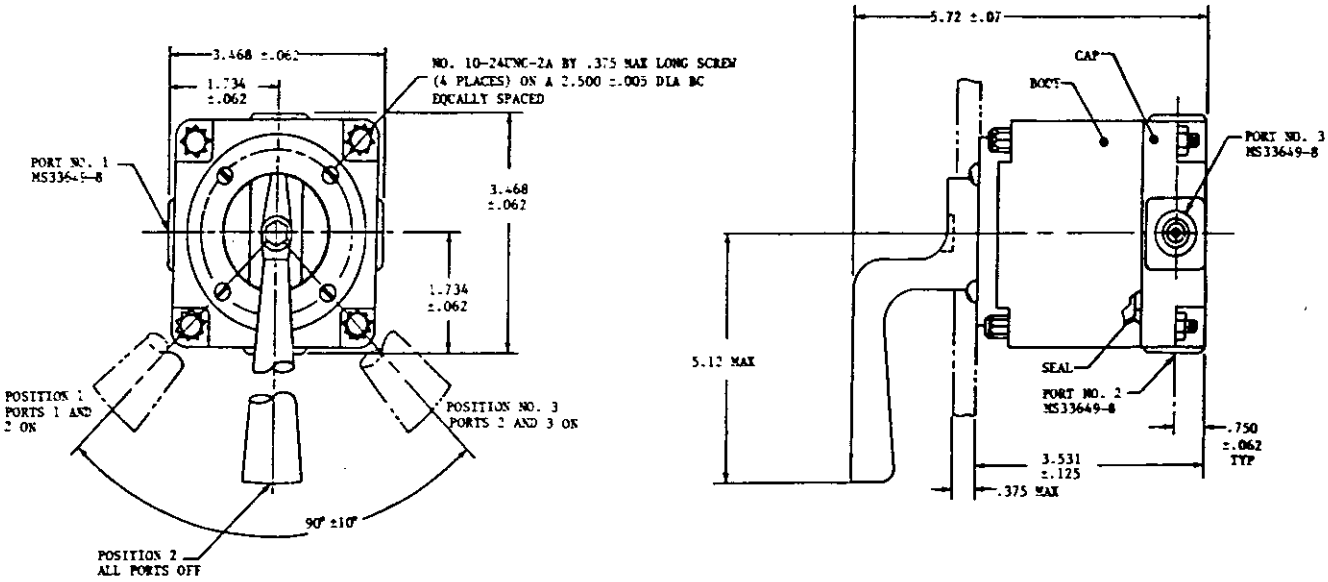

NOTES:
1. All dimensions are in inches.
2. Metric equivalents are acceptable.
3. Dimensions are after plating unless otherwise specified.

FIGURE 1. Valve configuration.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:09Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Material:

Body and cap: Low carbon steel, commercial.

Internal surfaces: Corrosion resistant steel and steel commercial.

Seals: Elastomers in accordance with MIL-P-25732.

Finish:

Body and cap: Painted semi-gloss enamel, commercial, color: optional.

Ports: MS33649-8 or equivalent.

Operating torque: 26 foot-pounds (ft lb) maximum at operating pressure.

Flow rating (Cv): 2.8 gallons per minute (gpm).

Life cycle requirements: 50,000 cycles at operating pressure. A cycle is rotation from port 1 to port 3 to port 1.

Internal leakage: 1 drop per minute maximum.

Unit weight: 9 pounds (lb) maximum.

Electrical requirements: N/A

Part number: M47322/1

Custodian:
Army - MI

Preparing activity:
Army - MI

(Project No. 4820-A006-01)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:09Z
Check the source to verify that this is the current version before use.