MILITARY SPECIFICATION SHEET

VALVE, SELECTOR, BASE, MOUNTING

This specification is approved for use within the Army Missile Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the valve mounting block described herein shall consist of this specification and the latest issue of MIL-V-47322(MI).

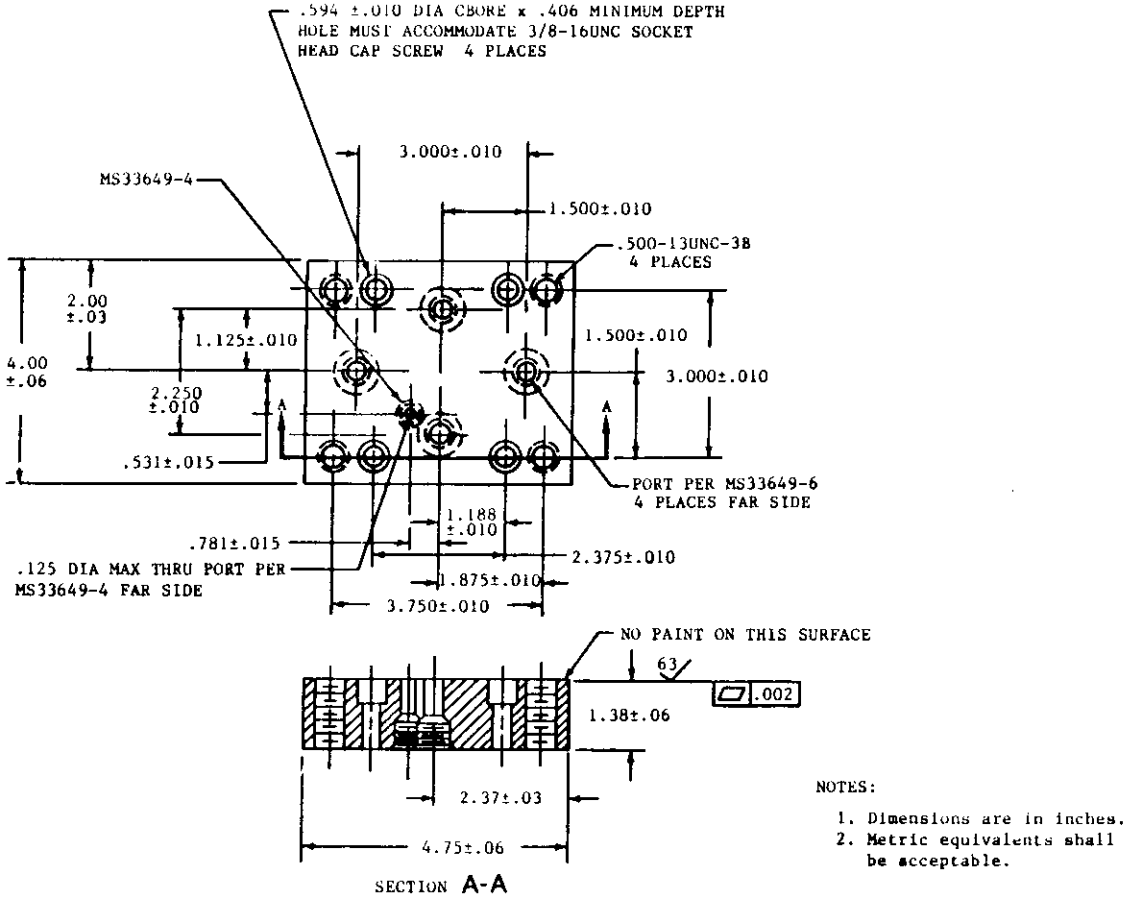

NOTES:
1. Dimensions are in inches.
2. Metric equivalents shall be acceptable.

FIGURE 1. Valve base, mounting.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:09Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Material: Steel in accordance with ASTM A36.

Finish: Passivate in accordance with QQ-P-35 and prime in accordance with DOD-P-15328. Top coat shall be in accordance with MIL-P-23377, type 1 plus MIL-C-46168, type optional, color forest green.

Machined surfaces: All machined surfaces shall be 125 roughness height rating (RHR) unless otherwise specified. Remove burrs and sharp edges.

Dimensions: Dimensions and tolerances shall be in accordance with ANSI Y14.5M.

Electrical requirements: N/A

Part number: M47322/4

Custodian:
Army - MI

Preparing activity:
Army - MI

(Project No. 4820-A006-04)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:09Z
Check the source to verify that this is the current version before use.