MILITARY SPECIFICATION SHEET

VALVE, SELECTOR

This specification is approved for use within the Army Missile Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the valve described herein shall consist of this specification and the latest issue of MIL-V-47322(MI).

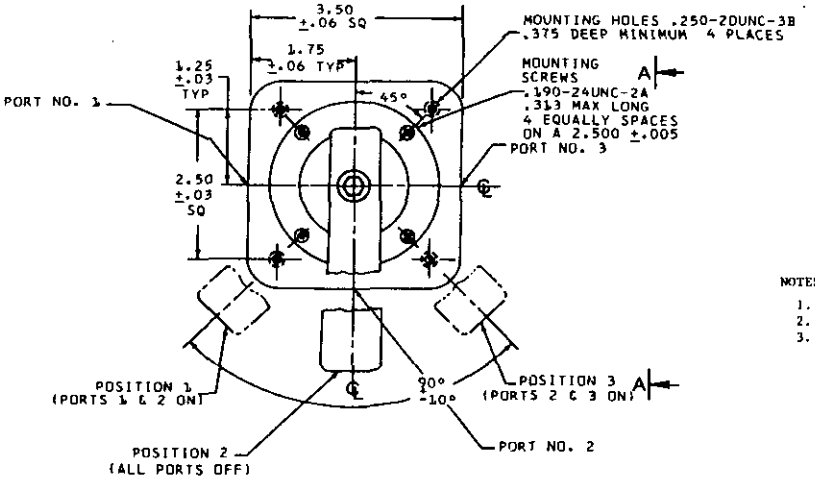

NOTES:
1. All dimensions are in inches.
2. Metric equivalents are acceptable.
3. Dimensions are after plating unless otherwise specified.

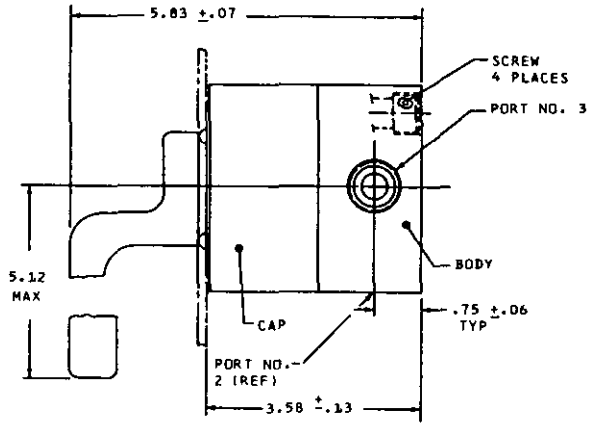

VIEW A-A

FIGURE 1. Valve, selector.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:09Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Material:

Body and cap: Low carbon steel, commercial.

Internal surfaces: Surfaces in contact with the operating media shall be corrosion resisting steel, commercial.

Seals: Elastomers in accordance with MIL-P-25732.

Finish:

Body and cap: Painted semi-gloss enamel, commercial. Color optional.

Ports: In accordance with MS33649-8 or equivalent.

Unit weight: 11 pounds (lbs) maximum.

Mechanical requirements:

Internal leakage: 1 drop per minute maximum.

Flow rating (Cv): 2.5 gallons per minute (gpm).

Operating torque: 15 foot pounds (ft lb) maximum at operating pressure.

Service life: 50,000 cycles of rotation at rated pressure. A cycle is rotation from port 1 to port 3 to port 1.

Electrical requirements: N/A

Part number: M47322/8

Custodian:
Army - MI

Preparing activity:
Army - MI

(Project No. 4820-A006-08)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:09Z
Check the source to verify that this is the current version before use.