JAN–STD–14

23 May 1949

NATIONAL MILITARY ESTABLISHMENT STANDARD

ARCHITECTURAL SYMBOLS

UNITED STATES
GOVERNMENT PRINTING OFFICE
WASHINGTON : 1949

For sale by the Superintendent of Documents, U. S. Government Printing Office, Washington 25, D. C. - Price 10 cents

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:50Z
Check the source to verify that this is the current version before use.

MUNITIONS BOARD STANDARDS AGENCY
NATIONAL MILITARY ESTABLISHMENT

WASHINGTON, D. C.

23 May 1949

Architectural Symbols
JAN–STD–14

1. This standard has been approved by the Departments of the Army, Navy, and Air Force and is published as a means of providing a list of architectural symbols for use on drawings.

2. The Munitions Board Standards Agency on 23 May 1949 approved this standard for printing and inclusion in the JAN series of standards.

3. In accordance with established procedure the Munitions Board Standards Agency has designated the Corps of Engineers, Bureau of Yards and Docks, and the Air Force, respectively, as Army-Navy-Air Force custodians of this standard.

4. This standard is mandatory for use effective 23 November 1949, in the preparation of drawings by the Departments of the Army, Navy, and Air Force. Deviations from this standard will be permissible only by authority of the Munitions Board Standards Agency.

5. Recommended corrections, additions, or deletions should be addressed to the Chairman, Munitions Board Standards Agency, Washington 25, D. C.

Source: https://assist.dla.mil -- Downloaded: 20260-23T20:50Z
Check the source to verify that this is the current version before use.

CONTENTS

1 GENERAL
1.1 Scope.
1.2 Notation.
1.3 Scale.
1.4 Mechanical Symbols.
1.5 Electrical Symbols.
1.6 Sectioning Conventions.
2 DOOR SYMBOLS
WINDOW SYMBOLS
Windows in Plan.
Venting of Windows in Elevation.
MISCELLANEOUS SYMBOLS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:50Z
Check the source to verify that this is the current version before use.

1. GENERAL

1.1 Scope. This standard establishes a listing of architectural symbols that shall be used in the preparation of architectural working drawings. The symbols are those most commonly employed. Additional symbols may be used wherever necessary, and the listed symbols may be modified to fit specific structural conditions.

1.1.1 *Limitation.* Representation of a symbol under a certain structural condition does not mean that the symbol is limited to use under this structural condition. When there is no change in symbol because of structural conditions, it is shown under only one structural condition.

1.2 Notation. When there is any doubt as to the meaning of a symbol, always notate.






1.3 Scale. Symbols for windows, doors, louvers, etc., are illustrated as used in drawings of scale $\frac{1}{8}'' = 1' - 0''$. When drawings are made smaller than this scale, the symbols may be simplified as long as the basic idea is retained. When drawings are made larger than this scale, the symbols should be presented in greater detail.

1.4 Mechanical symbols. For mechanical symbols used on architectural drawings, see JAN–STD–17, National Military Establishment Standard for Mechanical Symbols.

1.5 Electrical symbols. For electrical symbols used on architectural drawings, see JAN–STD–15, National Military Establishment Standard for Electrical and Electronic Symbols.

1.6 Sectioning conventions. For sectioning conventions used on architectural drawings for indicating materials, see JAN–STD–1, National Military Establishment Standard for General Drawing Practice.


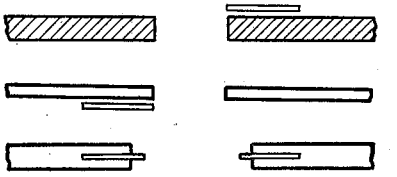




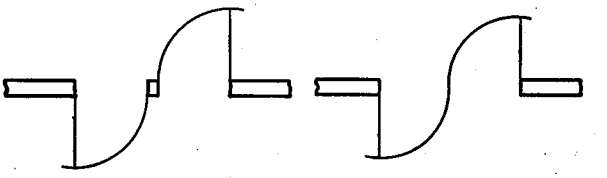
2. DOOR SYMBOLS [1]

Type	*Symbol*
Single-swing with threshold [2] in exterior masonry wall	
Single door, opening in	
Double door, opening out	
Single-swing with threshold [2] in exterior frame wall	
Single door, opening out	
Double door, opening in	
Refrigerator door	

[1] When interference occurs with 90° swing, indicate door swing at 45°.
[2] Actual material of the threshold may be indicated by abbreviation in accordance with JAN–STD–12, Abbreviations for Use on Drawings.




Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:50Z
Check the source to verify that this is the current version before use.

2. DOOR SYMBOLS (Continued)

Type	*Symbol*
Sliding doors	
In masonry walls	
In frame walls	
Single-swing, in interior masonry partition	
Single door	
Double door	
Single-swing, in interior frame partition	
Single door	
Double door	
Double-acting doors	
Single door	
Double door	
In and out doors	


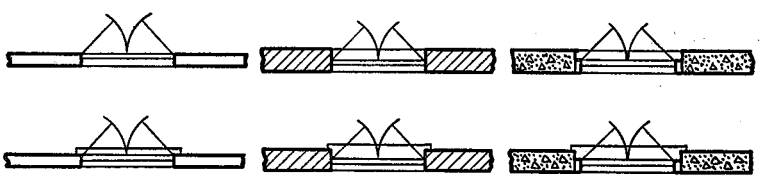
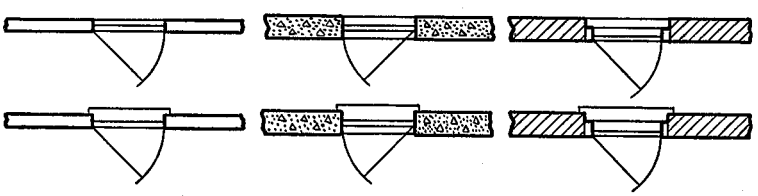
Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:50Z
Check the source to verify that this is the current version before use.

2. DOOR SYMBOLS (Continued)

Type	*Symbol*
Folding door or folding partition	
End hung	
Center hung	
Double-leaf door	
Revolving door	

3. WINDOW SYMBOLS










3.1 Windows in plan

Type	*Symbol*		
	Wood or metal sash in frame wall	*Metal sash in masonry wall*	*Wood sash in masonry wall*
Double hung			
Casement [3]			
Double, opening out			
Single, opening in			






[3] On complicated drawings casement sash may be shown as indicated for pivoted and vented, provided venting is indicated on elevations and indication as to direction of venting (in or out) is clearly indicated in details or schedules.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:50Z
Check the source to verify that this is the current version before use.

3.1 Windows in plan (Continued)

Type	*Symbol*		
	Wood or metal sash in frame wall	*Metal sash in masonry wall*	*Wood sash in masonry wall*
Horizontal-sliding sash			
Right sash over left			
Left sash over right			
Pivoted and vented (Indicate pivoting and direction of venting on elevation.)			



3.2 Venting of windows in elevation [4]

Type	*Symbol*
Top hinged, projected out	
Bottom hinged, projected in	
Pivoted, horizontal	
Hinged, left side	
Hinged, right side	

[4] Windows viewed from outside.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:50Z
Check the source to verify that this is the current version before use.

4. MISCELLANEOUS SYMBOLS

Item	*Symbol*
Stud partition, unless otherwise noted	
Elevators, hatchways, openings in floor, ducts, etc.	
Louvered openings in masonry wall	
Wood louver	
Metal louver	
Louvered opening in frame wall	

Copies of this National Military Establishment Standard may be obtained by directing requests as follows:

For Department of the Army agencies, to the Office of the Chief of Engineers, Washington 25, D. C.

For Department of the Army contractors, to the Contracting Officer.

For Department of the Navy activities, to the Supply Officer in Command, Naval Supply Center, Norfolk 11, Va.

For Department of the Navy contractors, to the Bureau of Supplies and Accounts, Washington 25, D. C.

For the Marine Corps, to the Quartermaster General, Headquarters, U. S. Marine Corps, Washington 25, D. C.

For the Department of the Air Force activities and Air Force contractors, to the Commanding General, Air Matériel Command, Wright-Patterson Air Force Base, Dayton, Ohio.

Copies of this National Military Establishment Standard may be obtained for other than official use by individuals, firms and contractors.

Both the title and the identifying symbol number should be stipulated when requesting copies of National Military Establishment Standards.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:50Z
Check the source to verify that this is the current version before use.