
THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-C-22992 Document identifier of the general specification (where applicable).

THIS SPECIFICATION IS APPROVED FOR USE BY all Departments and Agencies of the Department of Defense.

Form Approved
OMB No. 0704-0188

28 volt dc two wire
-02 insert arrangement

Qty	Contact	Size	Socket M39029	Pin M39029
1	A	4/0	49-335	48-327
1	N	4/0N	49-335 See note 9	48-328

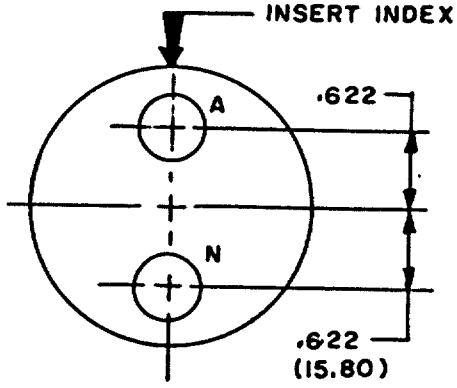


SERVICE D

-02 ICEA 2-NO. 2/0 conductor
Round type W cable 0-600 volts.

Front face of pin insert shown
(Socket insert opposite), unless
otherwise specified.

AC single phase three wire grounding
-06 insert arrangement

Qty	Contact	Size	Socket M39029	Pin M39029
2	A, B	4/0	49-335	48-327
1	N	4/0N	49-335 See note 9	48-328
3	G1, G2, G3	4G	49-332	48-322

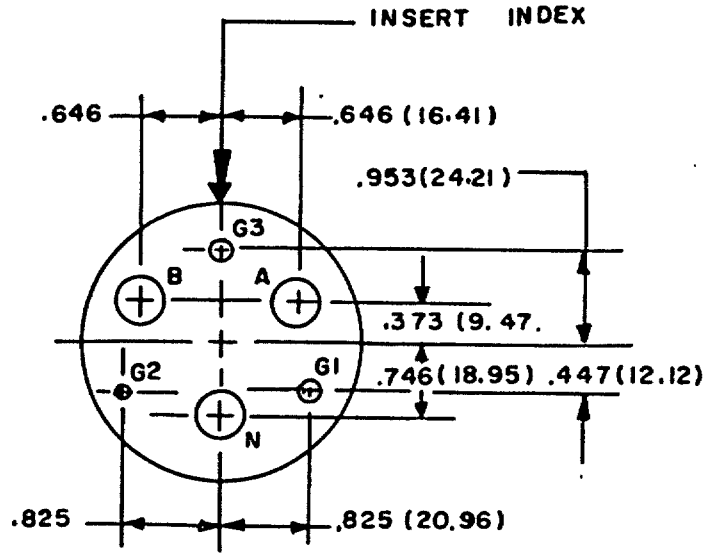

SERVICE D

-06 ICEA 3-NO. 2/0 conductor
Round type W cable 0-600 volts.

Insert arrangement	Contacts		Cable conductors MS90556 a MS90557		Contact bushings Required	
	Qty	Size	Qty	Size	Qty	P/N MS3348-
52-02	2	4/0	2	2/0	2	4/0-2/0L
52-06	3 3	4/0 4	3 3	2/0 5(G)	3 3	4/0-2/0L 4-5L

(F) denotes changes.

PREPARING ACTIVITY: NAVY-EC
CUSTODIANS: ARMY-CR NAVY-EC
AIR FORCE-85 DLA-
REVIEW: A-CR, N-AS, YD, AF-11
DLA-ES
USER: A-AT,AV,ME, N-MC,CG,SH,OS,
AF-19
PROJECT NUMBER: 5935-3733

MILITARY SPECIFICATION SHEET

TITLE
INSERT ARRANGEMENTS, ELECTRICAL CONNECTOR, SIZE 52, CLASS L, 200 AMPS

SPECIFICATION SHEET NUMBER
MS 14057F 09 Jun 89

SUPERSEDING
MS14057E, 20 Dec 82

AMSC N/A FSC 5935

DISTRIBUTION STATEMENT
A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:33Z
Click to view the full PDF of mil-s-14057f


DD Form 672, MAY 88 Previous editions are obsolete.

THIS SPECIFICATION IS APPROVED FOR USE BY all Departments and Agencies of the Department of Defense.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-C-22992

Document identifier of the general specification (where applicable).

Form Approved
OMB No. 0704-0188

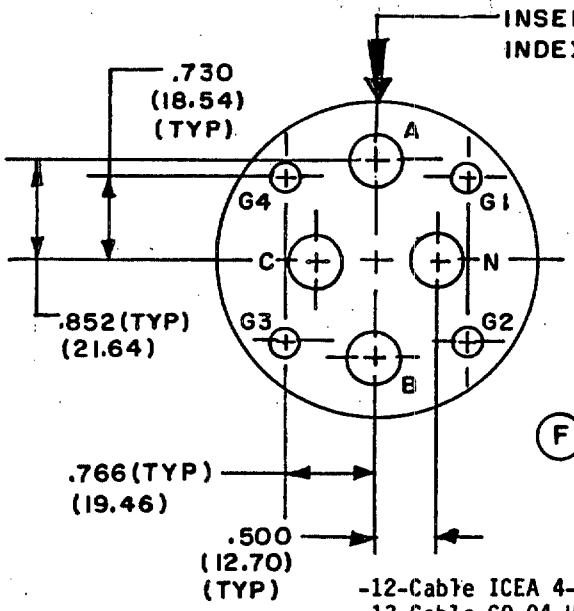

SERVICE D

AC three phase four wire grounding
-12 and -13 insert arrangement

Qty	Contact	Size	Socket M39029	Pin M39029
3	A, B, C	4/0	49-335	48-327
1	N	4/0N	49-335 See note 9	48-328
(F) 4	G1, G2, G3, G4	4G	49-332	48-322

-12-Cable ICEA 4-NO. 4/0 conductor, round type G cable 0-600 volts.
-13-Cable CO-04 HDE (4/0000-4/4R) 2380 in accordance with MIL-C-3432 52-12 shall be marked on 52-13 insert (see note 8)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Metric equivalents are in parentheses.
4. Unless otherwise specified, tolerance is ±.002 (0.05 mm).
5. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
6. Referenced documents shall be of the issue in effect on date of invitation for bid.
7. Unless otherwise specified, pin insert pattern shown. Socket inserts are the reverse.
8. Trademark and 52-( ) shall appear in available space. Contact identifying letter shall be located so as to identify relative contact.
9. Only the pin contact is lengthened and has the N (neutral) designation. The mating socket contact is the same as the power contact.

REQUIREMENTS:
1. Neutral pin (N) is not connected to shell.
2. Grounding pin (G) is connected to shell.
3. Applicable MS3348 crimp bushings shall be supplied with the contacts for insert arrangements as specified.

Insert rotation (degrees from normal)				
Arrangement number	Normal (see figure 1) dc or 60 Hz	Alternate (see figure 1) 400 Hz		
		W	X	Y
52-02	0°	---	---	---
52-06	0°	---	---	---
52-12, 52-13	0°	300°	---	---

Front face of pin insert shown (socket insert opposite), unless otherwise specified.

PREPARING ACTIVITY: NAVY-EC
CUSTODIANS: ARMY-CR, AIR FORCE-85, NAVY-EC, DLA-AF-11
REVIEW: A-CR, N-AS, YD, DLA-ES
USER: A-AT,AV,ME, N-MC,CG,SH,OS, AF-19
PROJECT NUMBER: 5935-3733

MILITARY SPECIFICATION SHEET
TITLE
INSERT ARRANGEMENTS, ELECTRICAL CONNECTOR, SIZE 52, CLASS L, 200 AMPS

SPECIFICATION SHEET NUMBER
MS 14057F
SUPERSEDING
MS14057E
AMSC N/A
FSC 5935

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:33Z
Check the source to verify that this is the current version before use.

THIS SPECIFICATION IS APPROVED FOR USE BY all Departments and Agencies of the Department of Defense.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-C-22992 Document identifier of the general specification (where applicable).


Form Approved
OMB No. 0704-0188

Insert in normal position
(60 Hz power only)

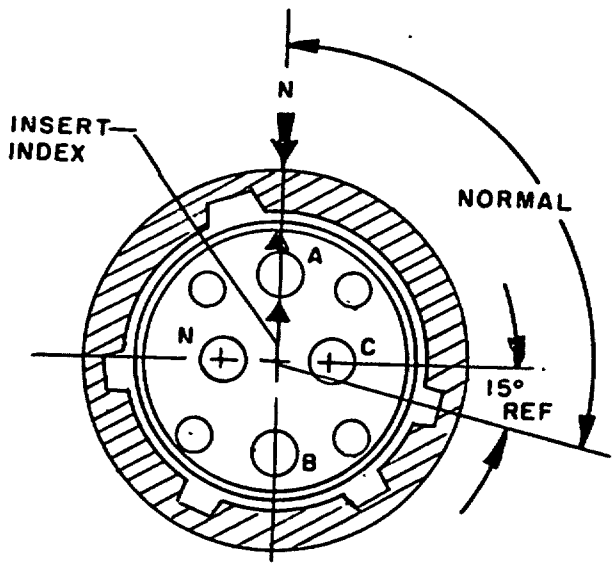


(REF. MS90555******S)
(REF. MS90557******S)
Socket contact pattern
Front face of socket insert shown

Insert in alternate position
(400 Hz power only)

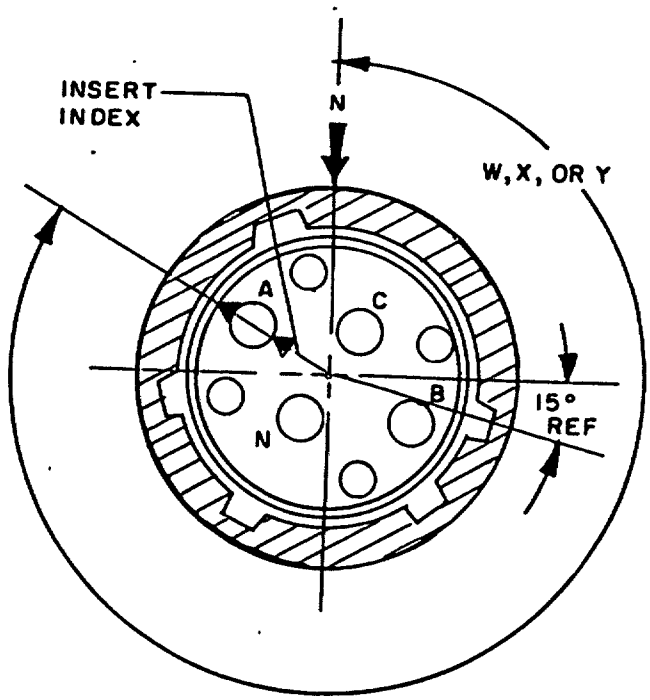


(REF. MS90555******SW)
(REF. MS90557******SW)
Socket contact pattern
Front face of socket insert shown

Insert in normal position
(60 Hz power only)

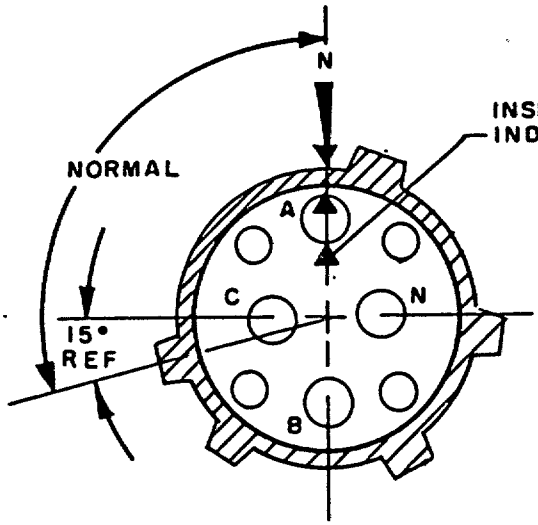

(REF. MS90556******P)
(REF. MS90558******P)
Socket contact pattern
Front face of pin insert shown

Insert in alternate position
(400 Hz power only)

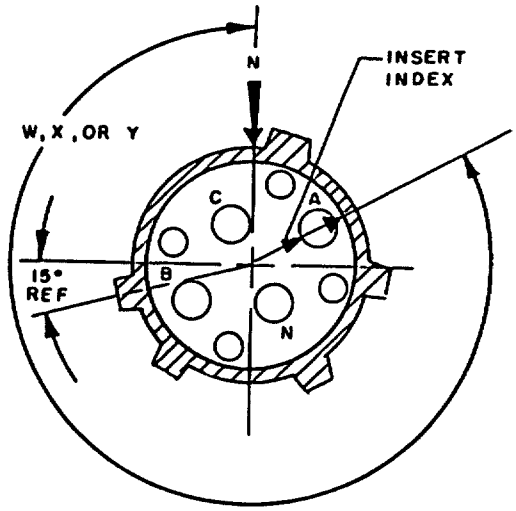

(REF. MS90556******PW)
(REF. MS90558******PW)
Socket contact pattern
Front face of pin insert shown

FIGURE 1.

PREPARING ACTIVITY: NAVY-EC CUSTODIANS: ARMY-CR NAVY-EC AIR FORCE-85 DLA- REVIEW: A-CR, N-AS, YD, AF-11 DLA-ES USER: A-AT,AV,HE, N-MC,CG,SH,OS, AF-19 PROJECT NUMBER: 5935-3733	MILITARY SPECIFICATION SHEET TITLE INSERT ARRANGEMENTS, ELECTRICAL CONNECTOR, SIZE 52, CLASS L, 200 AMPS	SPECIFICATION SHEET NUMBER MS 14057F SUPERSEDING MS14057E AMSC N/A FSC 5935
DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.		Page 3 of 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:33Z
Check to verify that this is the current version before use.