INCH-POUND

MS16628C
14 March 2012
SUPERSEDING
MS16628B
4 May 1990

DETAIL SPECIFICATION SHEET

RING, RETAINING, EXTERNAL, BOWED
(TAPERED SECTION TYPE)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and procurement specification MIL-R-21248.

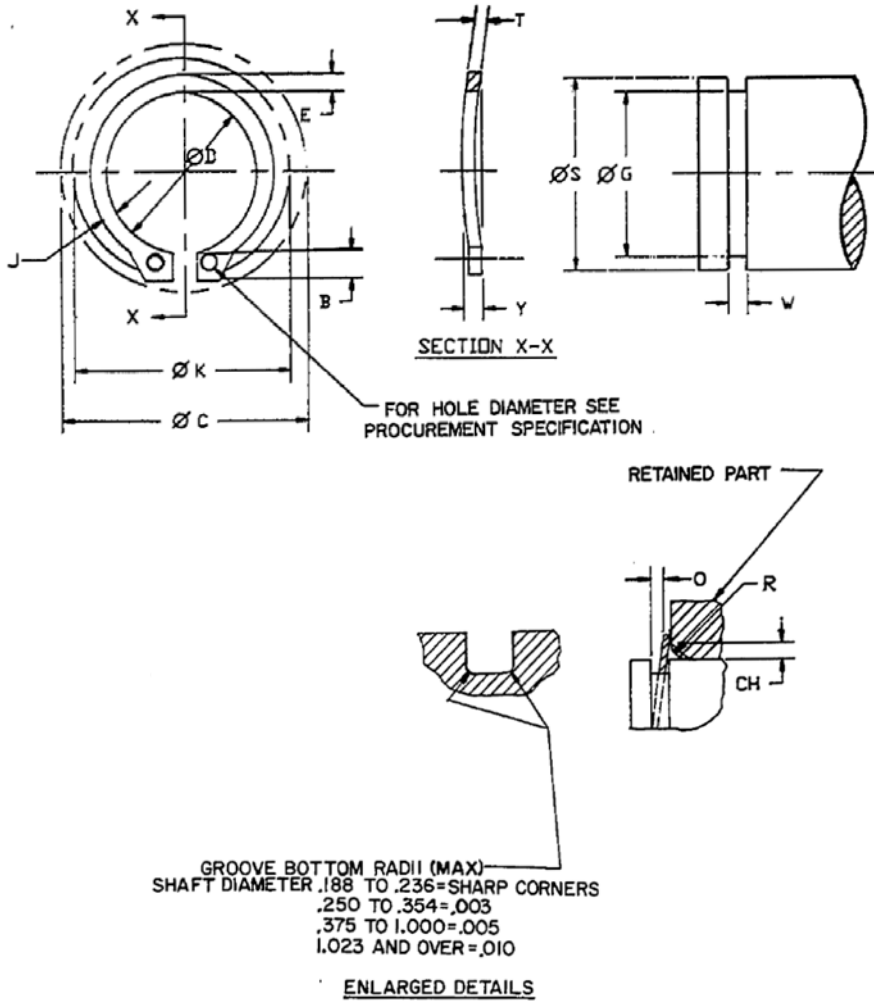


FIGURE 1. RING, RETAINING.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:59Z
Check the source to verify that this is the current version before use.

TABLE I DIMENSIONS.

ØS SHAFT (REF)		ØD FREE		B LUG HEIGHT		E LARGE SECTION HEIGHT		J SMALL SECTION HEIGHT		T 1/ THICKNESS		Y OVERALL BOW HEIGHT		ØG RECOMMENDED GROOVE (REF)		W WIDTH		ØK 3/	ØC 4/ CLEAR	O 5/ TAKE UP	R 6/ OF RETAINED PART (REF)	CH 6/ OF RETAINED PART (REF)
INCH	MM	BASIC	TOL	BASIC	TOL	BASIC	TOL	BASIC	TOL	BASIC	TOL	BASIC	TOL	BASIC	TOL	BASIC	TOL	MAX		MAX	MAX	MAX
.188	4.8	.168		.050		.025		.016		.015		.036		.175	±.0015	.030		.218	.298	.015	.014	.008
.197	5.0	.179	+.002	.056	±.002	.026	±.002	.016	±.002	.015		.036		.185	.0015	.030	+.003	.229	.319	.015	.014	.009
.219	5.6	.196	-.004	.056		.028		.017		.015		.036		.205	FIM 2/	.030	-.000	.252	.338	.015	.015	.009
.236	6.0	.215		.056		.030		.019		.015		.036		.222		.030		.272	.355	.015	.016	.010
.250	6.4	.225		.080		.035		.025		.025		.047		.230		.040		.290	.450	.015	.018	.011
.276	7.0	.250		.081		.035		.024		.025		.047		.255		.040		.315	.480	.015	.017	.010
.281	7.1	.256		.080		.038		.025		.025		.047		.261		.040		.326	.490	.015	.020	.012
.312	7.9	.281		.087		.040	±.003	.026	±.003	.025		.047	±.006	.290	±.002	.040		.357	.540	.015	.020	.012
.344	8.7	.309		.087		.042		.026		.025		.047		.321	.002	.040		.390	.570	.015	.021	.012
.354	9.0	.320		.087		.046		.029		.025		.047		.330	FIM 2/	.040		.405	.590	.015	.023	.014
.375	9.5	.338		.088		.050		.030		.025		.047		.352		.040		.433	.610	.015	.026	.015
.394	10.0	.354	+.002	.087		.052		.031		.025	±.002	.047		.369		.040		.452	.620	.015	.027	.016
.406	10.3	.366	-.005	.087	±.003	.054		.033		.025		.047		.382		.040		.468	.630	.015	.028	.017
.438	11.1	.395		.088		.055		.033		.025		.047		.412		.040		.501	.660	.015	.029	.017
.469	11.9	.428		.088		.060		.035		.025		.047		.443		.040		.540	.680	.015	.031	.018
.500	12.7	.461		.108		.065		.040		.035		.063		.468	±.002 .004	.055		.574	.770	.020	.034	.020
.551	14.0	.509		.108		.053		.036		.035		.063		.519	FIM 2/	.055		.611	.810	.020	.027	.016
.562	14.3	.521		.108		.072		.041		.035		.063		.530		.055	+.005	.644	.820	.020	.038	.023
.594	15.1	.550		.109		.076	±.004	.043	±.004	.035		.063	±.007	.559		.055	-.000	.680	.860	.020	.039	.023
.625	15.9	.579		.110		.080		.045		.035		.063		.588		.055		.715	.900	.020	.041	.025
.669	17.0	.621		.110		.082		.043		.035		.063		.629	±.003	.055		.756	.930	.020	.040	.024
.672	17.1	.621	+.005	.110		.082		.043		.035		.063		.631	.004	.055		.758	.930	.020	.040	.024
.668	17.5	.635	-.010	.136		.084		.048		.042		.073		.646	FIM 2/	.062		.779	1.010	.020	.042	.025
.750	19.0	.693		.136		.092		.051		.042		.073		.704		.062		.850	1.090	.020	.046	.027
.781	19.8	.722		.136		.094		.052		.042		.073		.733		.062		.883	1.120	.020	.047	.028
.812	20.6	.751		.136		.096	±.005	.054	±.005	.042		.073	±.008	.762		.062		.914	1.150	.020	.047	.028
.875	22.2	.810		.137		.104		.057		.042		.073		.821		.062		.987	1.210	.020	.051	.030
.938	23.8	.867		.166		.110		.063		.042		.073		.882		.062		1.054	1.340	.020	.055	.033
.984	25.0	.910		.167		.114		.064		.042		.073		.926		.062		1.106	1.390	.020	.056	.033
1.000	25.4	.925		.167		.116		.065		.042		.073		.940		.062		1.122	1.410	.020	.057	.034
1.023	26.0	.946		.168		.118		.066		.042		.073		.961		.062		1.147	1.430	.020	.058	.035
1.062	27.0	.982		.181	±.004	.122		.069		.050		.085		.998		.070		1.192	1.500	.020	.060	.036
1.125	28.6	1.041		.182		.128		.071		.050		.085		1.059		.070		1.261	1.550	.020	.063	.038
1.188	30.2	1.098		.182		.132		.072		.050		.085		1.118		.070		1.325	1.610	.020	.064	.038
1.250	31.7	1.156		.183		.140	±.006	.076	±.006	.050		.085	±.012	1.176	±.004 .005	.070		1.396	1.690	.020	.068	.041
1.312	33.3	1.214	+.010	.183		.146		.076		.050		.085		1.232	FIM 2/	.070		1.458	1.750	.020	.068	.041
1.375	34.9	1.272	-.015	.184		.152		.082		.050		.085		1.291		.070		1.529	1.800	.020	.072	.043
1.438	36.5	1.333		.184		.160		.086		.050		.085		1.350		.070		1.600	1.870	.020	.076	.045
1.500	38.1	1.387		.214		.168		.091		.050		.085		1.406		.070		1.668	1.990	.020	.079	.047

1/ T - THICKNESS "T" APPLIES TO UNPLATED RINGS. FOR CORROSION RESISTANT STEEL AND PLATED RINGS, +.002 SHOULD BE ADDED TO THE MAXIMUM TOLERANCE, i.e. ±.002 SHOULD BE +.004/-.002.

2/ FIM - (FULL INDICATOR MOVEMENT) IS THE MAXIMUM ALLOWABLE DEVIATION OF CONCENTRICITY BETWEEN THE GROOVE AND THE SHAFT.

3/ K - MAXIMUM DIAMETER WHEN THE RING IS PROPERLY SEATED IN THE GROOVE. (DESIGN REFERENCE DIMENSION).

4/ C - ACTUAL CLEARANCE DIAMETER WHEN THE RING IS SPRUNG OVER THE SHAFT PRIOR TO INSTALLATION INTO THE GROOVE. (DESIGN REFERENCE DIMENSION).

5/ O - END PLAY TAKE UP (DESIGN REFERENCE DIMENSION).

6/ R AND CH - RADII OR CHAMFERS ALLOWABLE ON PARTS TO BE RETAINED BY THE RING. THRUST LOADS OF RINGS, RETAINING PARTS WITH CORNER RADII OR CHAMFERS ARE TABULATED ON PAGE 6.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:59Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. CLASSIFICATION: RETAINING RINGS FURNISHED UNDER THIS STANDARD SHALL BE TYPE II, CLASS 2 OF THE PROCUREMENT SPECIFICATION.

2. MATERIAL:

   (a) CARBON SPRING STEEL,GRADE 1060 THRU 1095 (UNS G10600 THRU G10950) IN ACCORDANCE WITH ASTM A568/A568M OR ASTM A684/A684M.
   (b) CORROSION RESISTANT STEEL IN ACCORDANCE WITH AMS 5520 (UNS S15700).
   (c) BERYLLIUM COPPER, ALLOY NUMBER 170 (UNS C17000) OR ALLOY NUMBER 172 (UNS C17200) IN ACCORDANCE WITH ASTM B194.

3. HARDNESS:

TABLE II. HARDNESS.

ØSHAFT (REF)	CARBON STEEL	CORROSION RESISTANT STEEL	BERYLLIUM COPPER
.188 TO .236 INCL	-	-	77.9-82.0 HR15N 1/ (39-43 HRC EQUIV)
.250 TO .551 INCL	85.5-87.9 HR15N 1/ (50-55 HRC EQUIV)	83.5-85.9 HR15N 1/ (46-51 HRC EQUIV)	77.9-82.0 HR15N 1/ (39-43 HRC EQUIV)
.562 TO .669 INCL	68.5-73.0 HR30N 1/ (50-55 HRC EQUIV)	64.8-69.4 HR30N 1/ (46-51 HRC EQUIV)	58.6-62.2 HR30N 1/ (39-43 HRC EQUIV)
.688 TO 1.500 INCL	52.5-58.6 HR45N 1/ (48-53 HRC EQUIV)	50.3-56.1 HR45N 1/ (46-51 HRC EQUIV)	41.9-46.7 HR45N 1/ (39-43 HRC EQUIV)

1/ USE HIGHEST SCALE TO PROVIDE SECTION WIDTH EQUAL TO OR GREATER THAN 5 TIMES THE BRAILE IMPRESSION DIAMETER.

4. PROTECTIVE FINISH OR SURFACE TREATMENT:

   (a) CARBON STEEL – SHALL BE AS SPECIFIED (SEE TABLE III OR IV):

      (1) CADMIUM PLATE IN ACCORDANCE WITH SAE AMS-QQ-P-416, TYPE II, CLASS 3 OR ASTM B696, TYPE II, CLASS 5.

      (2) ZINC COAT IN ACCORDANCE WITH ASTM B633, TYPE II, CLASS Fe/Zn 5 OR ASTM B695, TYPE II, CLASS 5.

      (3) PHOSPHATE COAT IN ACCORDANCE WITH MIL-DTL-16232, TYPE Z, CLASS 2.

   (b) CORROSION RESISTANT STEEL – SHALL BE CLEANED, DESCALED AND PASSIVATED IN ACCORDANCE WITH SAE AMS2700.

5. PART NUMBER: THE BASIC MS PART NUMBER IS FOLLOWED BY A DASH NUMBER TAKEN FROM TABLE III AND IV.

   EXAMPLE: MS16628-1100 IS THE PART NUMBER FOR A CARBON STEEL, CADMIUM PLATE, EXTERNAL, BOWED RETAINING RING FOR USE IN A 1.000 DIAMETER SHAFT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:59Z
Check the source to verify that this is the current version before use.

TABLE III. DASH NUMBERS FOR MS16628.

ØS SHAFT (REF)	1/ CARBON STEEL CADMIUM PLATE	1/ CARBON STEEL ZINC COAT	1/ CARBON STEEL PHOSPHATE COAT	STEEL CORROSION RESISTANT	1/ BERYLLIUM COPPER	1/ BERYLLIUM COPPER CADMIUM PLATE
	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.
.188					-5018	-5018-1
.197					-5019	-5019-1
.219					-5021	-5021-1
.236					-5023	-5023-1
.250	-1025	-2025	-3025	-4025	-5025	-5025-1
.276	-1027	-2027	-3027	-4027	-5027	-5027-1
.281	-1028	-2028	-3028	-4028	-5028	-5028-1
.312	-1031	-2031	-3031	-4031	-5031	-5031-1
.344	-1034	-2034	-3034	-4034	-5034	-5034-1
.354	-1035	-2035	-3035	-4035	-5035	-5035-1
.375	-1037	-2037	-3037	-4037	-5037	-5037-1
.394	-1039	-2039	-3039	-4039	-5039	-5039-1
.406	-1040	-2040	-3040	-4040	-5040	-5040-1
.438	-1043	-2043	-3043	-4043	-5043	-5043-1
.469	-1046	-2046	-3046	-4046	-5046	-5046-1
.500	-1050	-2050	-3050	-4050	-5050	-5050-1
.551	-1055	-2055	-3055	-4055	-5055	-5055-1
.562	-1056	-2056	-3056	-4056	-5056	-5056-1
.594	-1059	-2059	-3059	-4059	-5059	-5059-1
.625	-1062	-2062	-3062	-4062	-5062	-5062-1
.669	-1066	-2066	-3066	-4066	-5066	-5066-1
.672	-1067	-2067	-3067	-4067	-5067	-5067-1
.688	-1068	-2068	-3068	-4068	-5068	-5068-1
.750	-1075	-2075	-3075	-4075	-5075	-5075-1
.781	-1078	-2078	-3078	-4078	-5078	-5078-1
.812	-1081	-2081	-3081	-4081	-5081	-5081-1
.875	-1087	-2087	-3087	-4087	-5087	-5087-1
.938	-1093	-2093	-3093	-4093	-5093	-5093-1
.984	-1098	-2098	-3098	-4098	-5098	-5098-1
1.000	-1100	-2100	-3100	-4100	-5100	-5100-1
1.023	-1102	-2102	-3102	-4102	-5102	-5102-1
1.062	-1106	-2106	-3106	-4106	-5106	-5106-1
1.125	-1112	-2112	-3112	-4112	-5112	-5112-1
1.188	-1118	-2118	-3118	-4118	-5118	-5118-1
1.250	-1125	-2125	-3125	-4125	-5125	-5125-1
1.312	-1131	-2131	-3131	-4131	-5131	-5131-1
1.375	-1137	-2137	-3137	-4137	-5137	-5137-1
1.438	-1143	-2143	-3143	-4143	-5143	-5143-1
1.500	-1150	-2150	-3150	-4150	-5150	-5150-1

1/ SUBSTITUTE CORROSION RESISTANT STEEL WHEN USED IN FOOD PROCESSING MACHINERY, OR IN FUEL OR LUBRICATION SYSTEMS, OR WHEN USED AT TEMPERATURES OVER 450°F (233°C).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:59Z
Check the source to verify that this is the current version before use.

TABLE IV. SUBSTITUTION TABLE (CROSS REFERENCE OF PART NUMBERS).

	INACTIVE	SUBSTITUTE	SUBSTITUTE	SUBSTITUTE
ØS SHAFT (REF)	CARBON STEEL	1/ CARBON STEEL CADMIUM PLATE	1/ CARBON STEEL ZINC COAT	1/ CARBON STEEL PHOSPHATE COAT
	MS16628	MS16628	MS16628	MS16628
.250	-25	-1025	-2025	-3025
.276	-27	-1027	-2027	-3027
.281	-28	-1028	-2028	-3028
.312	-31	-1031	-2031	-3031
.344	-34	-1034	-2034	-3034
.354	-35	-1035	-2035	-3035
.375	-37	-1037	-2037	-3037
.394	-39	-1039	-2039	-3039
.406	-40	-1040	-2040	-3040
.438	-43	-1043	-2043	-3043
.469	-46	-1046	-2046	-3046
.500	-50	-1050	-2050	-3050
.551	-55	-1055	-2055	-3055
.562	-56	-1056	-2056	-3056
.594	-59	-1059	-2059	-3059
.625	-62	-1062	-2062	-3062
.669	-66	-1066	-2066	-3066
.672	-67	-1067	-2067	-3067
.688	-68	-1068	-2068	-3068
.750	-75	-1075	-2075	-3075
.781	-78	-1078	-2078	-3078
.812	-81	-1081	-2081	-3081
.875	-87	-1087	-2087	-3087
.938	-93	-1093	-2093	-3093
.984	-98	-1098	-2098	-3098
1.000	-100	-1100	-2100	-3100
1.023	-102	-1102	-2102	-3102
1.062	-106	-1106	-2106	-3106
1.125	-112	-1112	-2112	-3112
1.188	-118	-1118	-2118	-3118
1.250	-125	-1125	-2125	-3125
1.312	-131	-1131	-2131	-3131
1.375	-137	-1137	-2137	-3137
1.438	-143	-1143	-2143	-3143
1.500	-150	-1150	-2150	-3150

1/ SUBSTITUTE CORROSION RESISTANT STEEL WHEN USED IN FOOD PROCESSING MACHINERY, OR IN FUEL OR LUBRICATION SYSTEMS, OR WHEN USED AT TEMPERATURES OVER 450°F (233°C).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:59Z
Check the source to verify that this is the current version before use.

NOTES:

1. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES.

2. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.

3. RECOMMENDED DESIGN LIMITATIONS AND USAGE:

(a) INTENDED USE - TO PROVIDE SHOULDERS FOR POSITIONING AND RETAINING MACHINE COMPONENTS ON SHAFTS. THE RINGS ARE BENT LIKE A BOW OUT OF PLANE. FREE ENDS AND OPPOSITE EDGE ABUT MACHINE PART, MID-SECTION OF RING ABUTS OUTER GROOVE WALL. RING WILL TAKE UP END PLAY RESILIENTLY. THE RING WILL COUNTERACT CONSIDERABLE CENTRIFUGAL FORCES. THE USE OF THE FOLLOWING FORMULAS ARE BASED ON THE FACT THAT THE RING MATERIAL WILL NOT FAIL IN COMPRESSION.

LIMITATION ON USE – THE FOLLOWING FORMULAS ARE NOT TO BE USED FOR BRITTLE MATERIALS SUCH AS CAST IRON, ETC.

WARNING: RINGS SHOULD NOT BE OVER EXPANDED DURING INSTALLATION SINCE THIS WILL LEAD TO RING FAILURE. IF THE RING HAS PLAY BETWEEN THE GROOVE DIAMETER AND THE INSIDE RING DIAMETER THIS INDICATES THAT THE RING HAS BEEN OVER EXPANDED, (PROVIDING THE GROOVE DIAMETER HAS BEEN MACHINED TO RECOMMENDED DIMENSIONS).

FOR APPROXIMATE SAFETY RPM LIMITS SEE TABLE V.

TABLE V. APPROXIMATE SAFETY RPM LIMITS.

Ø SHAFT (INCHES)		.250	.500	1	1.500
CARBON STEEL AND CORROSION RESISTANT STEEL	RPM LIMIT	80,000	40,000	20,000	15,000
BERYLLIUM COPPER	RPM LIMIT	50,000	25,000	13,000	11,000

(b) ALLOWABLE THRUST LOAD CAPACITY OF THE RING (ABUTTING COMPONENTS TO HAVE SHARP CORNERS) =

$$P = \frac{\pi STX}{F}$$

WHERE:

P = ALLOWABLE THRUST LOAD (POUNDS)
S = SHAFT DIAMETER (INCHES)
T = RING, THICKNESS (INCHES)
X = ULTIMATE SHEAR STRENGTH OF THE RING MATERIAL (PSI) 1/
F = FACTOR OF SAFETY.

A FACTOR OF SAFETY, F=4, IS RECOMMENDED SINCE THE RING UNDER LOAD IS SUBJECTED NOT ONLY TO PURE SHEAR STRESSES, BUT ALSO TO BENDING STRESSES.

(c) ALLOWABLE LOAD CAPACITY OF GROOVE WALL =

$$P = \frac{\pi SdY}{F}.$$

WHERE:

P = ALLOWABLE COMPRESSION LOAD (POUNDS)
S = SHAFT DIAMETER (INCHES)
d = GROOVE DEPTH (INCHES)
Y = YIELD STRENGTH IN COMPRESSION OF THE GROOVE MATERIAL (PSI)
F = FACTOR OF SAFETY

TO INSURE A SAFE WORKING LOAD A SAFETY FACTOR, F=2, IS RECOMMENDED.

(d) MINIMUM DISTANCE BETWEEN OUTER GROOVE WALL AND END OF HOUSING =

$$Z = 3d$$

WHERE:

Z = MINIMUM DISTANCE BEWTWEEN OUTER GROOVE WALL AND END OF SHAFT (INCHES)
d = GROOVE DEPTH (INCHES)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:59Z
Check the source to verify that this is the current version before use.

(e) LOCATION OF GROOVE =


$L_{MAX} = {}^{M}_{MIN} + {}^{T}_{MIN}$ + TAKE-UP (AS LISTED)

$L_{MIN} = {}^{M}_{MAX} + {}^{T}_{MAX}$ + .005 2/

TAKE-UP $\geq {}^{\Delta}L + {}^{\Delta}M + {}^{\Delta}T$ + .005 WHERE: ${}^{\Delta}L = {}^{L}_{MAX} - {}^{L}_{MIN}$

${}^{\Delta}M = {}^{M}_{MAX} - {}^{M}_{MIN}$

${}^{\Delta}T = {}^{T}_{MAX} - {}^{T}_{MIN}$



1/ X = 120,000 PSI ULTIMATE SHEAR STRENGTH FOR RINGS UP TO AND INCLUDING .672 INCH SHAFT DIAMETER OF CARBON STEEL OR CORROSION RESISTANT STEEL.
X = 150,000 PSI ULTIMATE SHEAR STRENGTH FOR RINGS .688 INCH AND OVER SHAFT DIAMETER OF CARBON STEEL OR CORROSION RESISTANT STEEL.
X = 110,000 PSI ULTIMATE SHEAR STRENGTH FOR RINGS OF ALL SHAFT DIAMETERS AND OF BERYLLIUM COPPER.

2/ IT IS ADVISABLE FOR SAFER RING ASSEMBLY TO CALCULATE ${}^{L}_{MIN}$ WITH ADDITIONAL .005" IN ORDER THAT THE RING IS NOT FLATTENED OUT COMPLETELY IN ADVERSE TOLERANCE CASES.

(f) VIBRATION =
A RETAINING RING WILL BE SECURE AGAINST VIBRATION IF ITS SHEAR FATIGUE STRENGTH EQUALS OR EXCEEDS THE FORCE CREATED BY THE MASS OF THE PART BEING REPEATEDLY ACCELERATED AGAINST THE RING.

(1) SHEAR STRENGTH OF RING (CRITICAL) (ABUTTING COMPONENTS TO HAVE SHARP CORNERS) =

$XT\ 1.1\ S \geq \frac{W}{g} a$

OR FOR HARMONIC MOTION

$a = \delta w^2$

$XT\ 1.1\ S \geq \frac{W}{g} \delta w^2$

WHERE:

X = ULTIMATE SHEAR STRENGTH OF RING MATERIAL (PSI) 3/
T = RING THICKNESS (INCHES)
S = SHAFT DIAMETER (INCHES)
W = WEIGHT OF ABUTTING PARTS (POUNDS)
g = ACCELERATION DUE TO GRAVITY (IN/SEC^2)
δ= AMPLITUDE OF VIBRATION (INCHES)
w = ANGULAR SPEED (RAD/SEC)
a = ACCELERATION (IN/SEC^2)

(2) COMPRESSIVE STRENGTH OF GROOVE MATERIAL (CRITICAL) =

$1.65YdS \geq \frac{W}{g} \delta^2$

WHERE:

Y = YIELD STRENGTH IN COMPRESSION OF THE GROOVE MATERIAL (PSI)
d = GROOVE DEPTH (INCHES)
OTHER SYMBOLS AS SHOWN IN (1)

(g) IMPACT CAPACITY OF RING OR GROOVE WALL =

$I_R = \frac{PT}{2}$ FOR THE RING (INCH POUNDS) (ABUTTING COMPONENTS TO HAVE SHARP CORNERS)

$I_G = \frac{Pd}{2}$ FOR THE GROOVE (INCH POUNDS)

WHERE:

P = ALLOWABLE THRUST LOAD OF RING OR GROOVE (POUNDS)
T = RING THICKNESS (INCHES)
I_G = IMPACT CAPACITY OF GROOVE WALL (INCH POUNDS)
d = GROOVE DEPTH (INCHES)
I_R = IMPACT CAPACITY OF RING (INCH POUNDS)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:59Z
Check the source to verify that this is the current version before use.

(h) LOAD CAPACITY, WITH THE RETAINED PART RADIUSED OR CHAMFERED =

WHEN THE RADIUS OR CHAMFER OF THE RETAINED PART DOES NOT EXCEED THE MAXIMUM RADIUS ALLOWED FOR THE BOTTOM OF THE RING GROOVE, THE LESSER LOAD CAPACITY COMPUTED FROM THE FORMULA ON PAGE 6 WILL APPLY. THE CORNER RADII AND CHAMFERS LISTED ON PAGE 2 WERE CHOSEN AS LARGE AS POSSIBLE FOR THE RING SIZES INVOLVED AND ARE RELATED TO THE MAXIMUM THRUST LOADS LISTED IN TABLE VI.

IF THE CORNER RADII OR CHAMFERS ARE SMALLER THAN THOSE LISTED, THEN THE THRUST LOADS INCREASE PROPORTIONALLY IN ACCORDANCE WITH THE FOLLOWING FORMULAS:

$$P^1 = \frac{P\,CH}{CH^1}$$

OR

$$P^1 = \frac{PR}{R^1}$$

WHERE:

P^1 = NEW ALLOWABLE THRUST LOAD
P = LISTED ALLOWABLE THRUST LOAD
CH^1 = NEW (SMALLER) CHAMFER
CH = LISTED CHAMFER
R^1 = NEW (SMALLER) CORNER RADIUS
R = LISTED CORNER RADIUS.

LIMIT LOADS LISTED IN TABLE VI ARE BASED ON RINGS OF AND OF BERYLLIUM COPPER (WORKING STRESS 180,000 PSI) FOR ALL SIZES AND ON RINGS OF CARBON STEEL OR CORROSION RESISTANT STEEL (WORKING STRESS 250,000 PSI) FOR SIZES .250 AND LARGER. IF THE ALLOWABLE GROOVE CAPACITY LOADS AS CALCULATED BY USING THE FORMULA ON PAGE 6 ARE LESS THEN THEY SHOULD BE USED.

TABLE VI. LIMIT LOADS.

NOMINAL RING SIZE		ALLOWABLE THRUST LOAD FOR RING ASSEMBLIES WITH PARTS HAVING MAXIMUM CORNER RADII OR CHAMFERS	
FROM	TO	CARBON STEEL OR CORROSION RESISTANT STEEL	BERYLLIUM COPPER
.188	.236		105 LB
.250	.469	470 LB	340 LB
.500	.672	910 LB	650 LB
.688	1.023	1340 LB	950 LB
1.062	1.500	1950 LB	1400 LB

3/ X = 120,000 PSI ULTIMATE SHEAR STRENGTH FOR RINGS UP TO AND INCLUDING .675 INCH SHAFT DIAMETER OF CARBON STEEL OR CORROSION RESISTANT STEEL.
X = 150,000 PSI ULTIMATE SHEAR STRENGTH FOR RINGS .688 INCH AND OVER SHAFT DIAMETER OF CARBON STEEL OR CORROSION RESISTANT STEEL.
X = 110,000 PSI WORKING STRESS FOR RINGS OF ALL SHAFT DIAMETERS AND OF BERYLLIUM COPPER.

4. CHANGES FROM PREVIOUS ISSUE. MARGINAL NOTATIONS ARE NOT USED IN THIS REVISION TO IDENTIFY CHANGES WITH RESPECT TO THE PREVIOUS ISSUE DUE TO THE EXTENT OF THE CHANGES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:59Z
Check the source to verify that this is the current version before use.

MILITARY INTEREST

Custodians:
Army - AR
Navy - OS
Air Force - 99

Preparing activity:
DLA - IS

(Project 5325-2012-001)

Review activities:
Army – AV, MI

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:59Z
Check the source to verify that this is the current version before use.