DISTRIBUTION STATEMENT A: APPROVED FOR PUBLIC RELEASE.
DISTRIBUTION IS UNLIMITED. This military standard is approved by NAVAL AIR SYSTEMS COMMAND, Department of the Navy and shall be used by that activity. All other military activities are required to employ this standard where suitable.


"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

REVIEWER SYMBOLS:

USER SYMBOLS:

FED. SUP CLASS
6125

APPROVED 9 December 1963 REVISED (A) 26 September 1970 (B) 3 February 1984 (C) 12 December 1986 (D) 30 september 1988

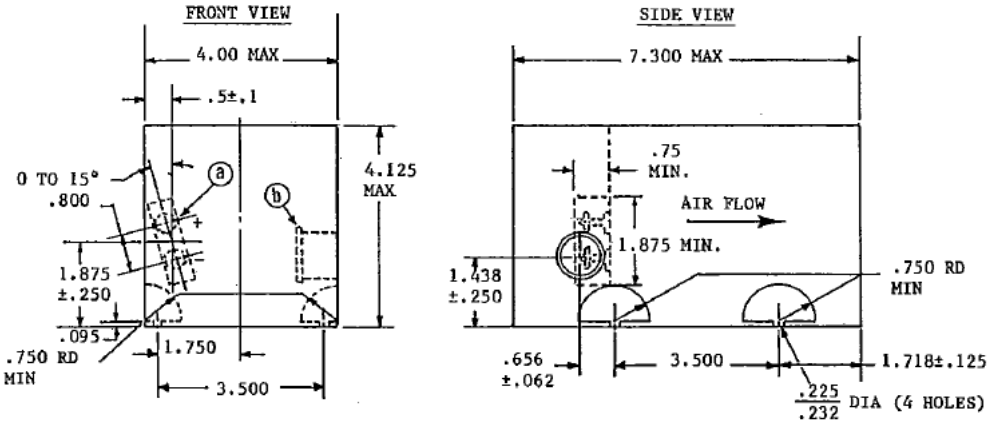

(a) 1/4-28 UNF-3A TERMINAL STUDS (2 REQ'D)

(b) RECEPTACLE TO FIT PLUG MS 3106R-16S-8S OR MS3459W-16S-8S

AC INPUT	
VOLTAGE (RANGE)	112.5-117.5 VOLTS
FREQUENCY	380-420 HERTZ
DC OUTPUT	
VOLTAGE	SEE FIGURE 2
MAXIMUM LOAD CURRENT	50 AMPERES
MINIMUM LOAD CURRENT	0.5 AMPERES
WEIGHT (LBS)	5.75 (MAX)

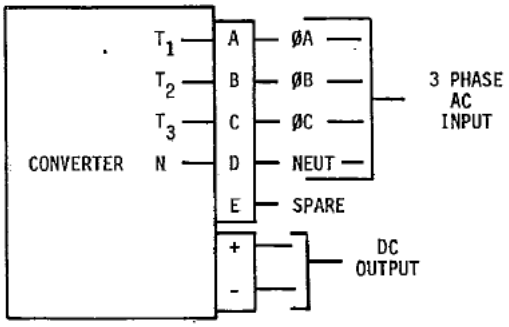


FIGURE 1. CONNECTION DIAGRAM.

MS PART NO.
MS-18103-2

INPUT PHASE ROTATION
A,B,C
DC NEGATIVE AND INPUT
NEUTRAL GROUNDED EXTERNALLY

(D) ENTIRE STANDARD REVISED

P.A. NAVY – AS Other Cust.	TITLE **CONVERTER, 50 AMPERE, CLASS C NONREGULATED, AIRCRAFT, FAN COOLED**	**MILITARY STANDARD** **MS18103(AS)**
PROCUREMENT SPECIFICATION MIL-C-7115	SUPERSEDES	SHEET 1 OF 3


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:14Z
Check the source to verify that this is the current version before use.

DISTRIBUTION STATEMENT A: APPROVED FOR PUBLIC RELEASE.
DISTRIBUTION IS UNLIMITED. This military standard is approved By NAVAL AIR SYSTEMS COMMAND, Department of the Navy and shall be used by that activity. All other military activities are required to employ this standard where suitable.

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

REVIEWER SYMBOLS:

USER SYMBOLS:

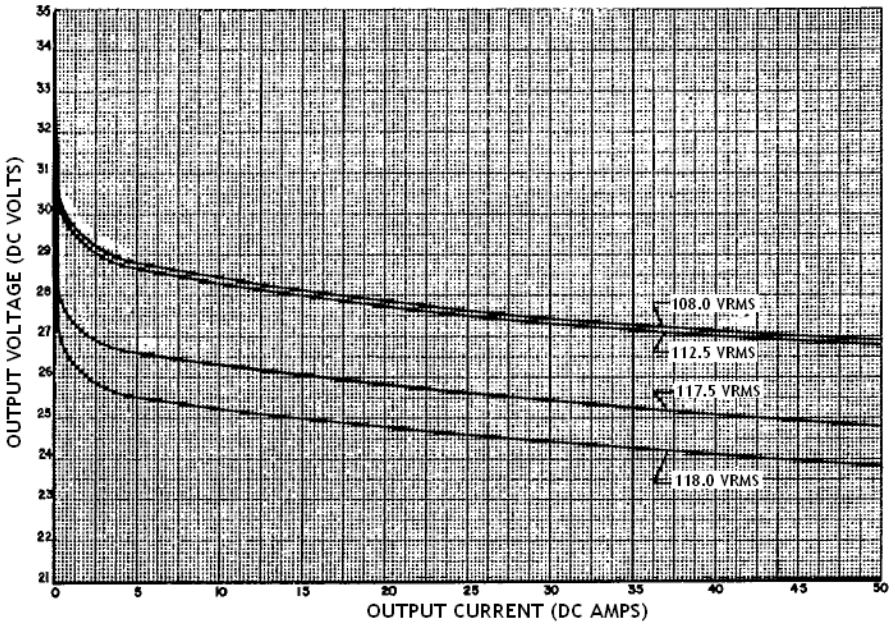

INPUT OUTPUT	AMPS DC	108.0 VRMS MIN. VDC	112.5 VRMS MIN. VDC	117.5 VRMS MAX VDC	118.0 VRMS MAX. VDC
	*0.0	29.4	30.6	33.1	33.2
	0.5	26.9	28.0	30.1	30.2
	5.0	25.5	26.6	28.7	28.8
	12.5	25.1	26.2	28.1	28.2
	25.0	24.6	25.6	27.5	27.6
	37.5	24.2	25.2	27.1	27.2
	50.0	23.8	24.8	26.8	26.9

FIGURE 2. OUTPUT VOLTAGE LIMITS.

* ZERO LOAD READINGS FOR INFORMATION ONLY.

APPROVED 9 December 1963 REVISED (A) 26 September 1970 (B) 3 February 1984 (C) 12 December 1986 (D) 30 september 1988

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:14Z
Check the source to verify that this is the current version before use.

DISTRIBUTION STATEMENT A: APPROVED FOR PUBLIC RELEASE.
DISTRIBUTION IS UNLIMITED. This military standard is approved By NAVAL AIR SYSTEMS COMMAND, Department of the Navy and shall be used by that activity. All other military activities are required to employ this standard where suitable.

USER SYMBOLS: REVIEWER SYMBOLS:

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

REQUIREMENTS:

THE CONVERTER SHALL MEET THE REQUIREMENTS OF MIL-C-7115 AS MODIFIED BELOW. (PARAGRAPH NUMBERS REFER TO MIL-C-7115)

3.4.1.3.3 COLOR. DELETE "COLOR NUMBER 17875 (WHITE)" OF FIRST SENTENCE AND ADD "COLOR NUMBER 37038 (BLACK)."

3.7.1.2.3 OUTPUT STARTING VOLTAGE. ADD TO SECOND SENTENCE: "EXCEPT FOR THE FIRST 1.50 SECONDS FROM THE ONSET OF THE TRANSIENT, WHEN A MAXIMUM VOLTAGE OF 45 VOLTS SHALL BE ALLOWED."

3.7.1.4.2 TYPE II, NONREGULATED CONVERTERS. ADD: "EXCEPT THE CONDUCTED EMISSIONS REQUIREMENTS OF CE-03, MIL-STD-461 SHALL BE RELAXED 15 AND 25 db, RESPECTIVELY FOR THE POSITIVE AND NEGATIVE LEADS FROM 150 Khz TO 1.0 MHz."

3.7.1.5 ACOUSTICAL NOISE. NOT APPLICABLE

3.7.2.2 ACCELERATION. NOT APPLICABLE.

3.7.2.9 EXPLOSIVE ATMOSPHERE. NOT APPLICABLE.

4.7.2.2.3 VOLTAGE REGULATION AT MINIMUM TEMPERATURE-ALTITUDE CONDITIONS. DELATE "-30°C" AND REPLACE WITH "-55°C".

4.7.2.6 INPUT CURRENT BALANCE. DELETE "25 PERCENT" AND REPLACE WITH "50 PERCENT".

4.7.2.10 OVERLOAD AND SHORT CIRCUIT CAPACITY. ADD TO FIRST SENTENCE. "EXCEPR THAT THE MAXIMUM AMBIENT TEMPERATURE SHALL NOT EXCEED 85°C."

4.7.2.15 ACOUSTICAL NOISE. NOT APPLICABLE.

4.7.2.18 ACCELERATION. NOT APPLICABLE.

4.7.2.25 EXPLOSIVE ATMOSPHERE. NOT APPLICABLE.

NOTES:

1. DIMENSIONS ARE IN INCHES. TOLERANCE IS ±.015 UNLESS OTHERWISE SPECIFIED.
2. THE COMPLETE REQUIREMENTS FOR PROCURING THE CONVERTER DESCRIBED HEREIN SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF MIL-C-7115.
3. MS18103-2 SUPERSEDES MS18103-1.

APPROVED 9 December 1963 REVISED (A) 26 September 1970 (B) 3 February 1984 (C) 12 December 1986 (D) 30 september 1988

P.A. NAVY – AS Other Cust.	TITLE **CONVERTER, 50 AMPERE, CLASS C NONREGULATED, AIRCRAFT, FAN COOLED**	**MILITARY STANDARD** **MS18103(AS)**
PROCUREMENT SPECIFICATION MIL-C-7115	SUPERSEDES	SHEET 3 OF 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:14Z
Check the source to verify that this is the current version before use.