


FED SUP CLASS
5935

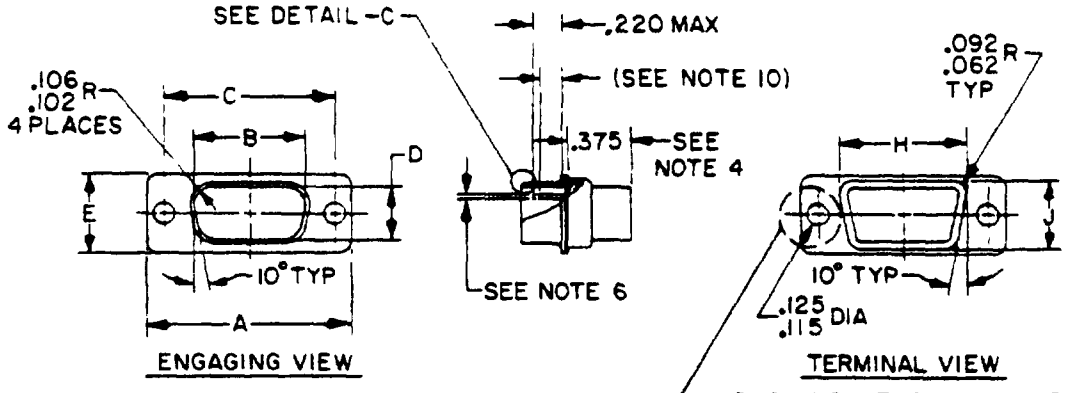


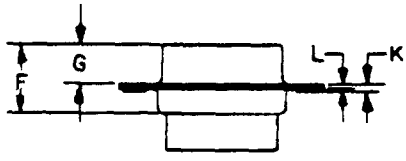




ALTERNATE METHOD OF SECURING SHELL


DETAIL-A-



DETAIL-C-

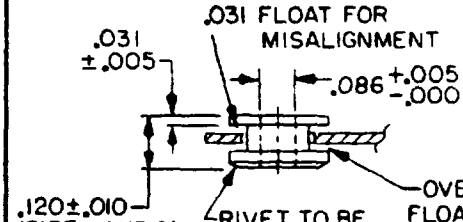

DETAIL-B-
FLOATING MOUNTING BUSHING

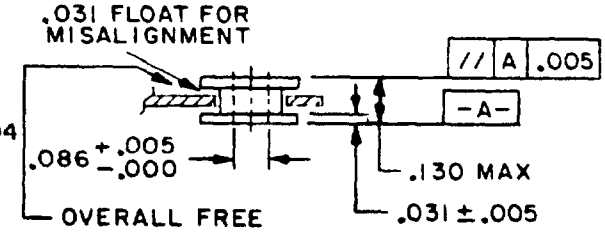

DETAIL-D- (F)
DUAL FLOATING MOUNTING BUSHING

Inches	mm	Inches	mm	Inches	mm
004	0 10	062	1 57	115	2 92
.005	0 13	.065	1.65	.120	3 05
.008	0.20	070	1 78	.125	3 18
010	0 25	086	2 18	129	3 28
030	0 76	092	2 34	.130	3 30
031	0 79	102	2.59	.220	5 59
040	1 02	106	2 69	375	9.52

(F) DENOTES CHANGE

P A NAVY-EC Other Cust AF-85 ARMY-CR	International interest	TITLE CONNECTORS, ELECTRIC, RECTANGULAR, MINIATURE, POLARIZED SHELL, RACK AND PANEL, SHELL, PLUG, PIN CONTACTS, CRIMP TYPE	MILITARY STANDARD MS18271
Procurement Specification MIL-C-24308		SUPERSEDES	PAGE 1 OF 4

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5935-3611-03

AMSC N/A

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

REVISED (A) 21 MAR 69 (B) 20 OCT 69 (C) 10 OCT 70 (D) 13 JUN 73 (E) 13 NOV 78 (F) 26 JAN 89

APPROVED 30 NOV 67

User activities: Army - AT, Navy - MC, CG, SH, Air Force

Review activities: Army - MI, Navy - AS, Air Force, DLA-ES

11, 99

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:18Z
Check the source to verify that this is the current version before use.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

Review activities: Army - MI; Navy - AS; Air Force - DLA-ES

User activities: Army - AT; Navy - MC, CG, SH; Air Force

11, 99

DD FORM 1 MAY 72 672 (Coordinated) previous editions of this form are obsolete

P A NAVY-EC
Other Cust AF-85 ARMY-CR

Procurement Specification MIL-C-24308

Interim revision

SUPERSEDES

TITLE CONNECTORS, ELECTRIC, RECTANGULAR, MINIATURE, POLARIZED SHELL, RACK AND PANEL, SHELL, PLUG, PIN CONTACTS, CRIMP TYPE

MILITARY STANDARD

MS18271

PAGE 2 OF 4

MS number	Shell size	Dimensions (F)										
		A	B	C	1/ D	E	F	G	H	J	K	L
MS18271-1	1	1.228 (31.19) 1.198 (30.43)	.671 (17.04) .661 (16.79)	.989 (25.12) .979 (24 87)	.334 (8.48) .324 (8.23)	.509 (12.93) .479 (12.17)	.432 (10.97) .412 (10.46)	.241 (6.12) .229 (5.82)	.769 (19.53) .749 (19.02)	.432 (10.97) .412 (10.46)	.060 (1.52) .035 (0.89)	.040 (1.02) .020 (0.51)
MS18271-2	2	1.556 (39.52) 1.526 (38.76)	.999 (25.37) .989 (25.12)	1.317 (33.45) 1.307 (33.20)	.334 (8.48) .324 (8.23)	.509 (12.93) .479 (12.17)	.432 (10.97) .412 (10.46)	.241 (6.12) .229 (5.82)	1.093 (27.76) 1.073 (27.25)	.432 (10.97) .412 (10.46)	.060 (1.52) .035 (0.89)	.040 (1.02) .020 (0.31)
MS18271-3	3	2.103 (53.42) 2.073 (52.65)	1.539 (39.09) 1.529 (38.84)	1.857 (47.17) 1.847 (46.91)	.334 (8.48) .324 (8.23)	.509 (12.93) .479 (12.17)	.436 (11.07) .416 (10.57)	.236 (5.99) .224 (5.69)	1.635 (41.53) 1.615 (41.02)	.432 (10.97) .412 (10.46)	.070 (1.78) .050 (1.27)	.049 (1.24) .029 (0.74)
MS18271-4	4	2.744 (69.70) 2.714 (68.94)	2.187 (55.55) 2.177 (55.30)	2.505 (63.63) 2.495 (63.37)	.334 (8.48) .324 (8.23)	.509 (12.93) .479 (12.17)	.436 (11.07) .416 (10.57)	.236 (5.99) .224 (5.69)	2.282 (57.96) 2.262 (57.45)	.432 (10.97) .412 (10.46)	.070 (1.78) .050 (1.27)	.049 (1.24) .029 (0.74)
MS18271-5	5 2/	2.650 (67.31) 2.620 (66.55)	2.084 (52.93) 2.074 (52.68)	2.411 (61.24) 2.401 (60.99)	.441 (11.20) .431 (10.95)	.620 (15.75) .590 (14.99)	.436 (11.07) .416 (10.57)	.236 (5.99) .224 (5.69)	2.188 (55.58) 2.168 (55.07)	.544 (13.82) .524 (13.31)	.070 (1.78) .050 (1.27)	.049 (1.24) .029 (0.74)
MS18271-6	6	2.744 (69.70) 2.714 (68.94)	2.217 (56.31) 2.207 (56.06)	2.505 (63.63) 2.495 (63.37)	.508 (12.90) .498 (12.65)	.683 (17.35) .653 (16.59)	.436 (11.07) .416 (10 57)	.236 (5.99) .224 (5.69)	2.312 (58.72) 2.292 (58.22)	.606 (15.39) .586 (14.88)	.070 (1.78) .050 (1.27)	.049 (1.24) .029 (0.74)

APPROVED 30 NOV 67

REVISED (F) FOR CHANGES SEE PAGES 1, 2, AND 3

FED SUP CLASS 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:18Z
Check the source to verify that this is the current version before use.

This military standard is approved for use by all Departments and Agencies of the Department of Defense Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

Review activities Army - MI
Navy - AS
Air Force - 11, 99
DLA-ES

User activities Army AT
Navy - MC, CG, SH
Air Force

(F)

MS number	Shell size	Dimensions										
		A	B	C	1/ D	E	F	G	H	J	K	L
MS18271-7	1	Same as MS18271-1 except per detail B										
-8	2	MS18271-2										
-9	3	MS18271-3										
-10	4	MS18271-4										
-11	5	MS18271-5										
-12	6	MS18271-6										
-13	1	Same as MS18271-1 except per detail D										
-14	2	MS18271-2										
-15	3	MS18271-3										
-16	4	MS18271-4										
-17	5	MS18271-5										
-18	6	MS18271-6										

(F) 1/ Part numbers MS18271-7 through MS18271-12 are inactive. For new design use MS18271-13 through MS18271-18.

(F) 2/ See note 9.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:18Z
Check the source to verify that this is the current version before use.

This military standard is approved for use by all Departments and Agencies of the Department of Defense Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

Review activities Army - MI
Navy - AS
Air Force - 11, 99
DLA-ES

User activities Army - AT
Navy - MC, CG, SH
Air Force

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Procurement Specification MIL-C-24338

P A NAVY-EC
Other Cust AF-85 ARMY-CR

International interest

SUPERSEDES

TITLE CONNECTORS, ELECTRIC, RECTANGULAR, MINIATURE, POLARIZED SHELL, RACK AND PANEL, SHELL, PLUG, PIN CONTACTS, CRIMP TYPE

MILITARY STANDARD

MS18271

PAGE 4 OF 4

FED SUP CLASS 5935

NOTES

1. Dimensions are in inches
2. Metric equivalents are in parentheses.
3. Metric equivalents are given for general information only.
4. Insulator may project .375 (9.52 mm) maximum.
5. Wire insulation .072 (1.83 mm) maximum for arragements MS18273-1, MS18274-1, MS18275-1, MS18276-1 and MS18277-1. Wire insulation .054 (1.37 mm) maximum for arrangements MS18273-2, MS18274-2, MS18275-2, MS18276-2, MS18277-2 and MS14004-1.
6. Pin diameter .041/.039 (1.04/0.99 mm) for arrangements MS18273-1, MS18274-1, MS18275-1, MS18276-1 and MS18277-1. Pin diameter .0305/.0295 (0.775/0.749 mm) for arrangements MS18273-2, MS18274-2, MS18275-2, MS18276-2, MS18277-2 and MS14004-1.
7. Patent notice. The Government has a royalty free license under the U.S. Patents listed below for the benefit of manufacturers of the items disclosed and described herein, either for the Government or for use in equipment delivered to the Government.

Patent numbers

2790153 expires April 23, 1974
3110093 expires November 12, 1980
3158424 expires November 24, 1981

8. Copyright notice. All information disclosed in this military standard which is or may be copyrighted by ITT Cannon Electric is reproduced herein with the express permission of the copyright owner.
9. "D" dimension for shell size 5 will change from .441 - .431 (11.20 - 10.95 mm) to .446 - .436 (11.33 - 11.07 mm) effective 1 July 1980.
10. Dimensions are .155 (3.94 mm) minimum full pin diameter extension (sizes 3 through 6) and .164 (4.17 mm) minimum full pin diameter extension (sizes 1 and 2)
11. In the event of a conflict between the text of this standard and the references cited herein, the text of this standard shall take precedence.
12. Referenced Government documents of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation form a part of this standard to the extent specified herein.

APPROVED 30 NOV 67 REVISED (F) FOR CHANGES SEE PAGES 1, 2, AND 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:18Z
Check the source to verify that this is the current version before use.