

FED. SUP CLASS
1660

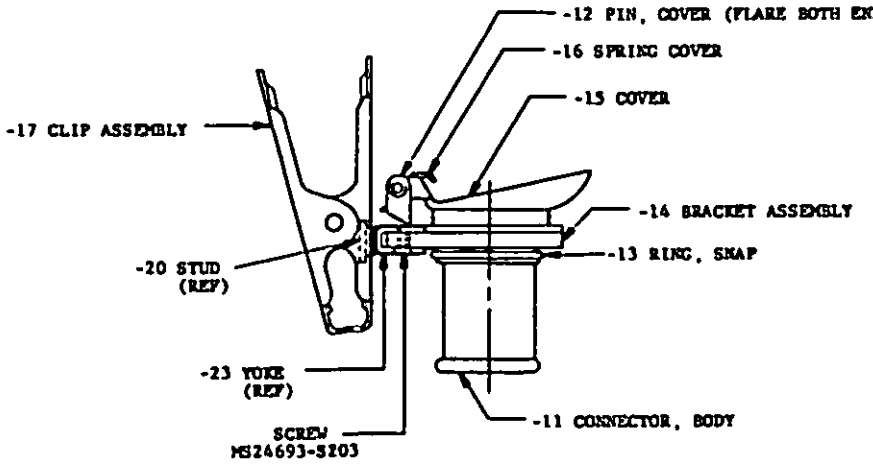

-1 ASSY

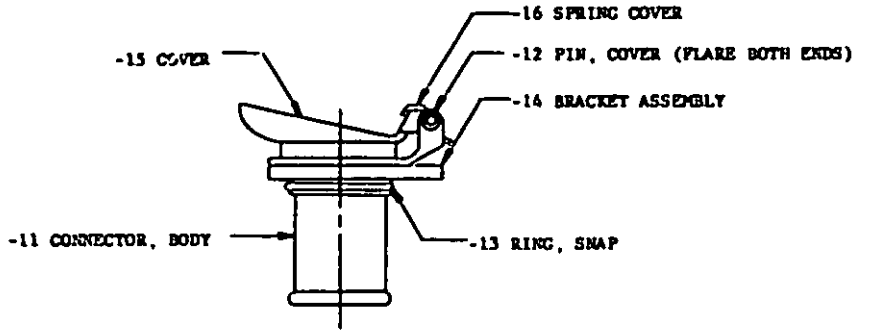

-2 ASSY

DASH NO.	TYPE
-1 ASSY	I
-2 ASSY	II

NOTE:

1. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.010, ANGLES ±1°.

   EXAMPLE OF PART NUMBERS: MS22058-1-CONNECTOR, OXYGEN HOSE TO REGULATOR, TYPE I.
   MS22058-2-CONNECTOR, OXYGEN HOSE TO REGULATOR, TYPE II.

FOR DESIGN FEATURE PURPOSES THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

© DENOTES CHANGES

P.A. NAVY - AS Other Cust ARMY - AV USAF - 99	TITLE: CONNECTOR, OXYGEN HOSE TO REGULATOR	MILITARY STANDARD MS22058
PROCUREMENT SPECIFICATION MIL-C-19064	SUPERSEDES AN6002, ACEL DWG 33H777, USAF 54B3735	SHEET 1 OF 7

DD FORM 1 MAR 72 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

AMSC- N/A

PROJECT NO. 1660-0529

APPROVED 30 APR 63 REVISED (8) 22 MAR 73 (C) 31 JAN 86

REVIEWER SYMBOLS: USAF - 11,71 ARMY - GI.

USER SYMBOLS:

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft supplement should be based on the information in the current DODISS."


DISTRIBUTION STATEMENT A: Approved for public release, distribution is unlimited.

DISTRIBUTION STATEMENT A APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED.

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:45Z
Check the source to verify that this is the current version before use.


FED. SUP CLASS
1660

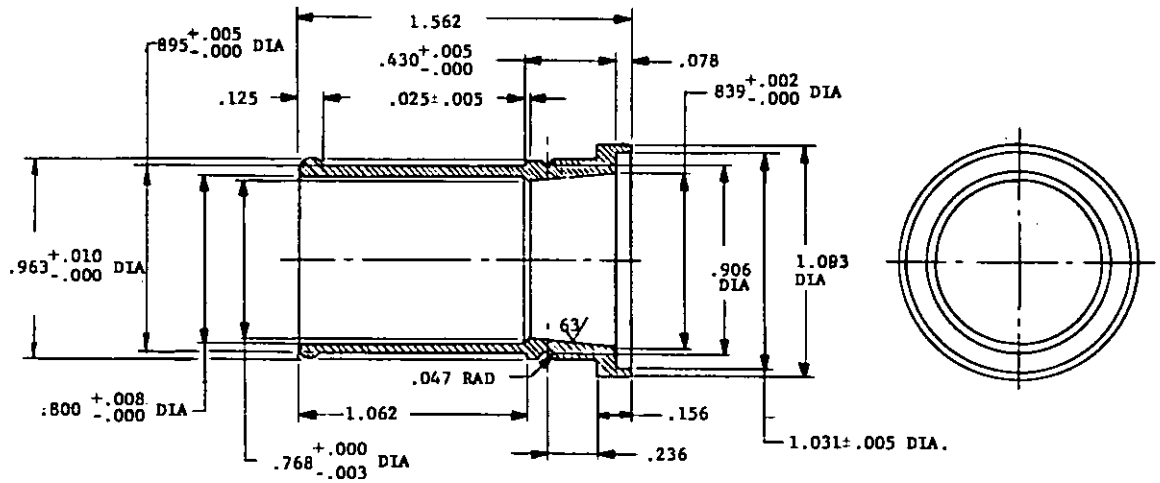

NOTES:

1. MATERIAL: BRASS, QQ-B-626, COMP 22, 1/2 HARD.
2. (C) FINISH: CADMIUM PLATE, QQ-P-416, TYPE I, CLASS 1. OPTIONAL FINISH: ZINC PLATE, ASTM B663, FE/ZN 13,TYPE I OR NICKEL PLATE, MIL-C-26074, CLASS I, GRADE B.
3. BREAK SHARP EDGES .005 MAX RAD.
4. SURFACE TEXTURE SHALL BE IN ACCORDANCE WITH ANSI B46.1.


-11 CONNECTOR, BODY

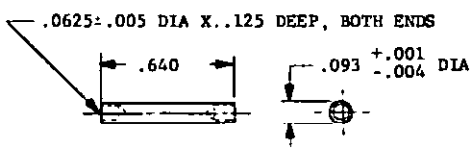

NOTES:

1. MATERIAL: BRASS, QQ-B-626, COMP 22, 1/2 HARD, OR BRASS TUBING, MEETING ABOVE REQUIREMENTS.
2. (C) FINISH: CADMIUM PLATE, QQ-P-416, TYPE I, CLASS 1 OR ZINC PLATE, ASTM B663, FE/ZN 13, TYPE I OR NICKEL PLATE, MIL-C-26074, CLASS 1, GRADE B.

-12 FIN, COVER

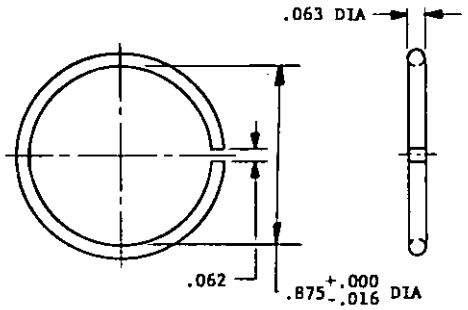

NOTES:

1. MATERIAL: MUSIC WIRE, QQ-W-470.
2. (C) FINISH: CADMIUM PLATE, QQ-P-416, TYPE I, CLASS 1 OR ZINC PLATE, ASTM B663, FE/ZN 13, TYPE I OR NICKEL PLATE, MIL-C-26074, CLASS I, GRADE B.
3. HEAT RING 500° TO 550°F FOR 20 MINUTES AFTER FORMING.

-13 RING, SNAP

APPROVED 30 APR 63 REVISED (C) FOR CHANGES SEE SHEETS 2,3,4,6 AND 7

P.A. NAVY - AS Other Cust ARMY - AV USAF - 99	TITLE CONNECTOR, OXYGEN HOSE TO REGULATOR	MILITARY STANDARD MS22058
PROCUREMENT SPECIFICATION MIL-C-19064	SUPERSEDES: AN6002, ACEL DWG 33H777, USAF 54B3735	SHEET 2 OF 7

DD FORM 1 MAR 72 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PLATE NO 22058

USER SYMBOLS:

REVIEWER SYMBOLS:
USAF - 11,71
ARMY - GL

* "Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:45Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
1660

USER SYMBOLS:

REVIEWER SYMBOLS:
USAF - 11,71
ARMY - GL

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

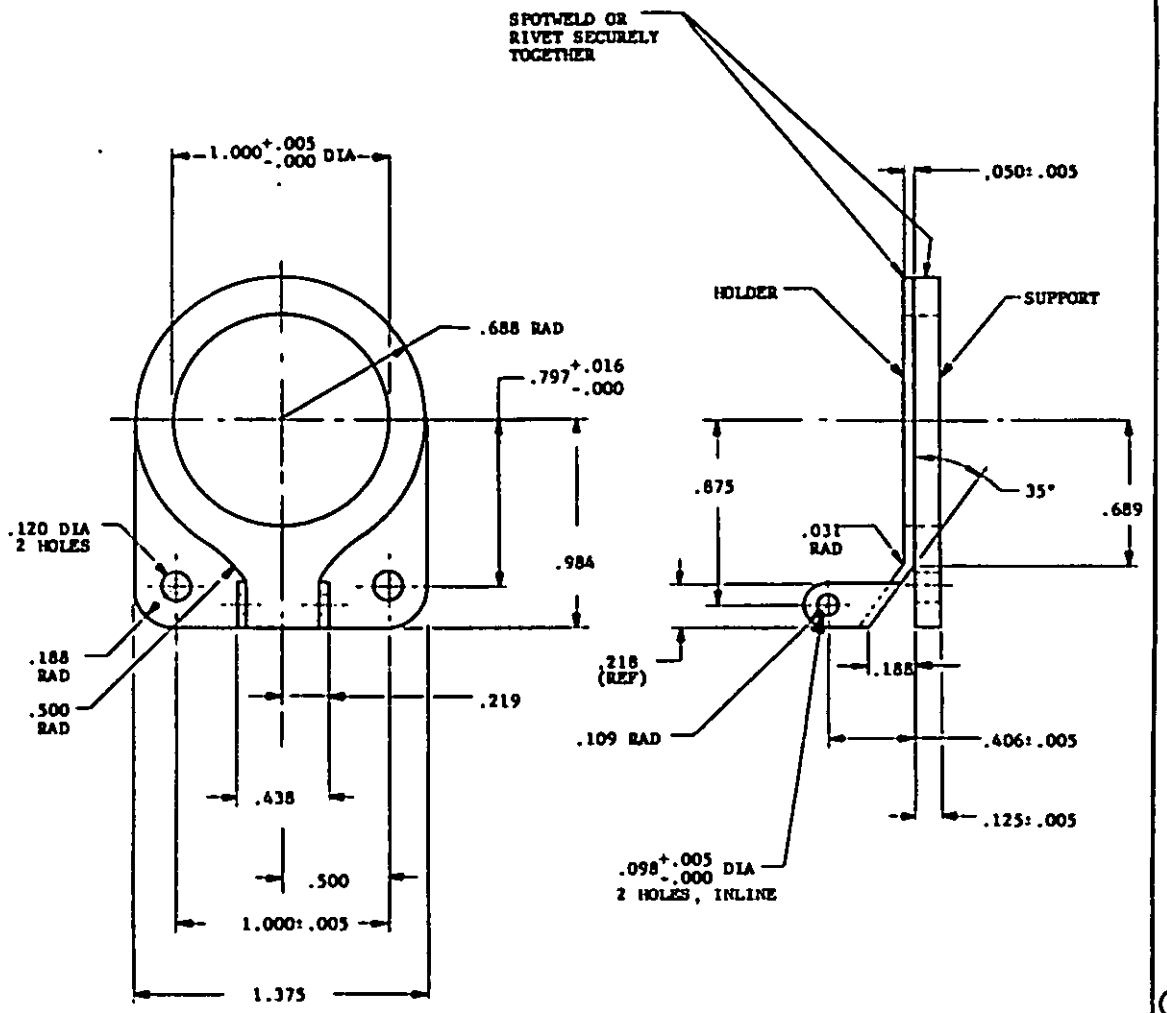

-14 BRACKET ASSEMBLY

NOTES:

(C) 1. MATERIAL: STEEL, ASTM A606, COLD ROLLED, CONDITION AS ROLLED OR STEEL BARS, ASTM A108, GRADE 1020.

(C) 2. FINISH: CADMIUM PLATE, QQ-P-416, TYPE I, CLASS 1, OR ZINC PLATE, ASTM B663, FE/ZN 13, TYPE I OR NICKEL PLATE MIL-C-26074, CLASS I, GRADE B.

3. REMOVE ALL BURRS AND SHARP EDGES.

APPROVED 30 APR 63 REVISED (C) FOR CHANGES SEE SHEETS 2,3,4,6 AND 7


This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. NAVY - AS Other Cust ARMY - AV USAF - 99	TITLE CONNECTOR, OXYGEN HOSE TO REGULATOR	MILITARY STANDARD MS22058
PROCUREMENT SPECIFICATION MIL-C-1906A	SUPERSEDES AN6002, ACEL DWG 33H777, USAF 54B3735	SHEET 3 OF 7

DD FORM 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. PLATE NO. 22388

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:45Z
Check the source to verify that this is the current version before use.


FED. SUP CLASS
1660

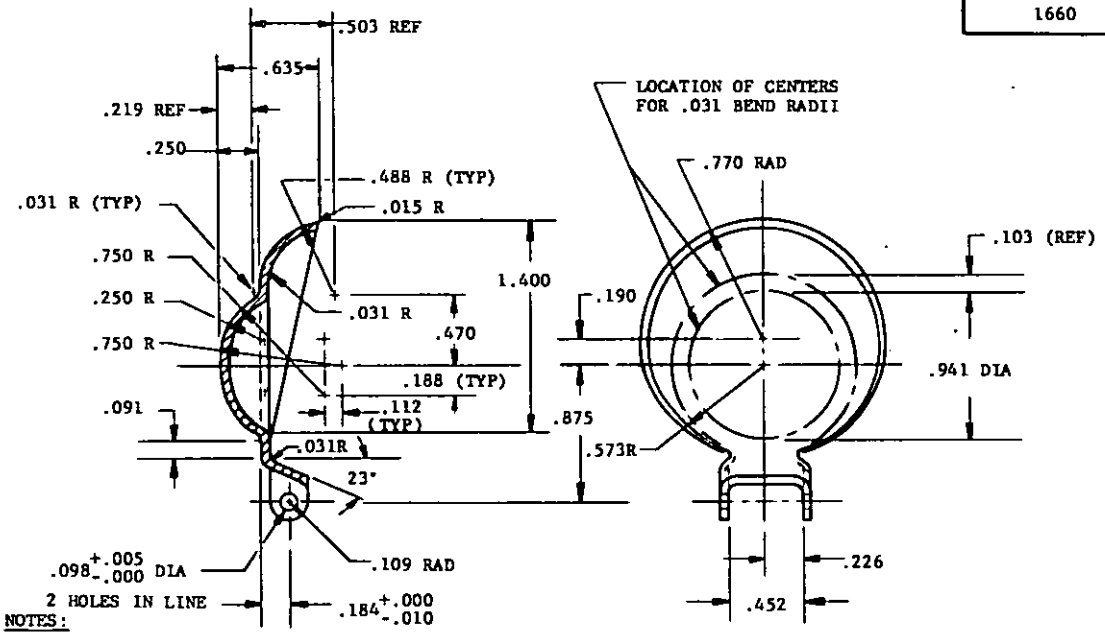

NOTES:

1. MATERIAL: ALUMINUM ALLOY, QQ-A-250/5e, TEMPER O, .051 THICK.
2. FINISH: ANODIZE, TYPE I, MIL-A-8625.
3. HEAT TREAT: AFTER FORMING TO CONDITION T4.
4. REMOVE ALL BURRS AND SHARP EDGES .010 MIN RADIUS.

-15 COVER

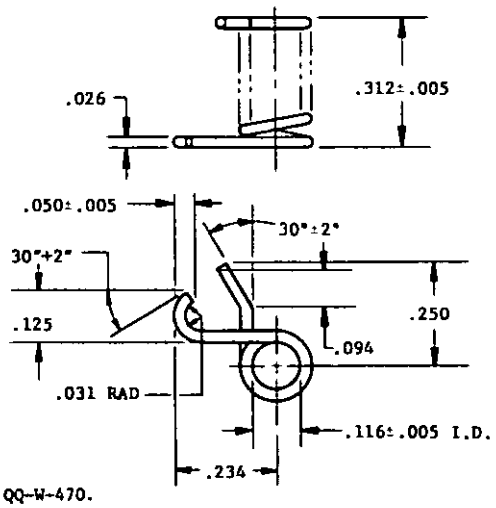

NOTES:

1. MATERIAL: STEEL QQ-W-470.
2. (C) FINISH: CADMIUM PLATE, QQ-P-416, TYPE I, CLASS 1 OR ZINC PLATE, ASTM B663, FE/ZN 13,TYPE I OR NICKEL PLATE, MIL-C-26074, CLASS I, GRADE. B.
3. NUMBER OF COILS: 7.
4. LOAD NOT CRITICAL, HEAT SPRING 500° TO 550°F FOR FIVE MINUTES AFTER FORMING.

-16 SPRING, COVER

APPROVED 30 APR 63 REVISED (C) FOR CHANGES SEE SHEET 2,3,4,6 AND 7

USER SYMBOLS:

REVIEWER SYMBOLS:
USAF - 11,71
ARMY - GL

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. NAVY - AS Other Cust ARMY - AV USAF - 99	TITLE CONNECTOR, OXYGEN HOSE TO REGULATOR	MILITARY STANDARD MS22058
PROCUREMENT SPECIFICATION MIL-C-19064	SUPERSEDES: AN6002, ACEL DWG 33H777, USAF 54B3735	SHEET 4 OF 7


DD FORM 1 MAR 72 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.


PLATE NO. 22058


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:45Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
1660

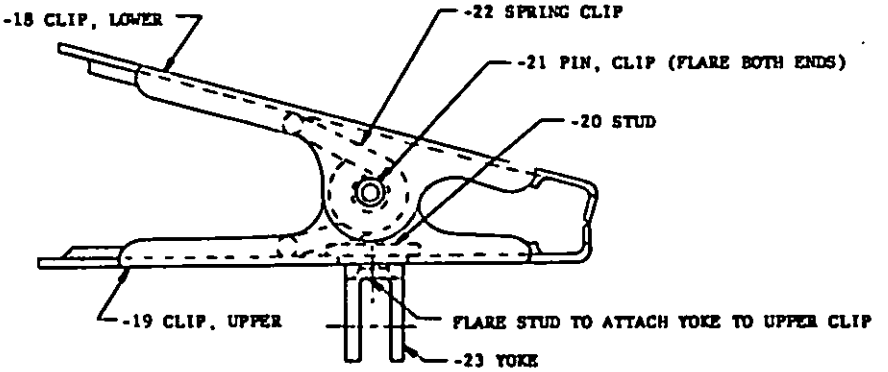

-17 CLIP ASSEMBLY

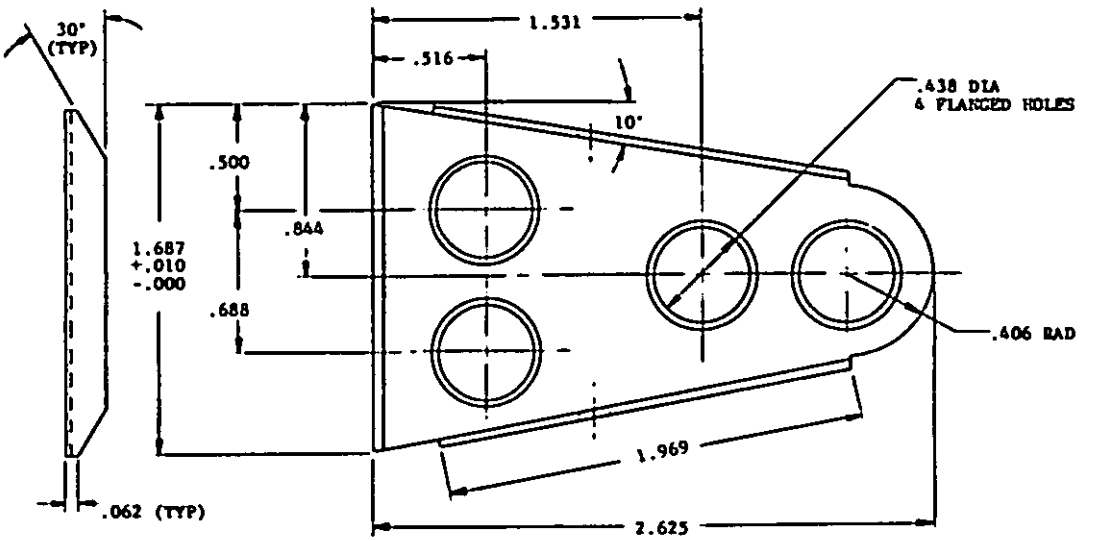

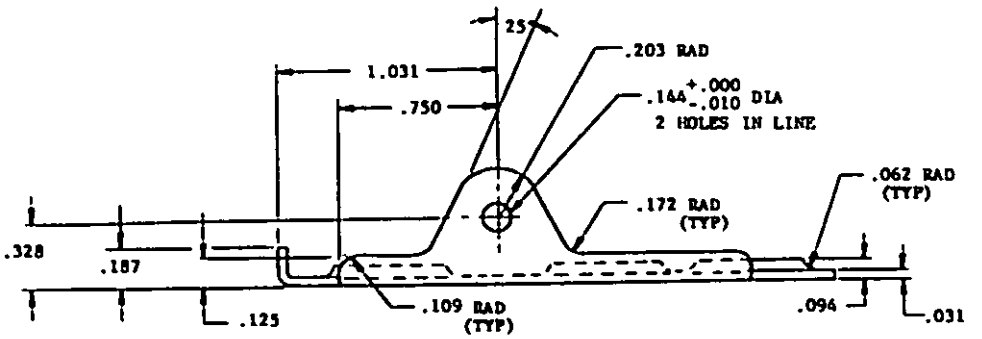

-18 CLIP, LOWER

FOR NOTES SEE SHEET 6

REVISED © FOR CHANGES SEE SHEETS 2,3,4,6 AND 7
APPROVED 30 APR 63

USER SYMBOLS

REVIEWER SYMBOLS
USAF - 11,71
ARMY - GL

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft direction should be based on the information in the current DODISS."

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use should be made from this document.

P.A. NAVY - AS Other Cust ARMY - AV USAF - 99	TITLE CONNECTOR, OXYGEN HOSE TO REGULATOR	MILITARY STANDARD MS22058
PROCUREMENT SPECIFICATION MIL-C-19064	SUPERSEDES AN6002, ACFI, DWG 33H777, USAF 54B3735	SHEET 5 OF 7


DD FORM 1 MAR 72 672-1 (Coordinated)


PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PLATE NO. 22058

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:45Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
1660

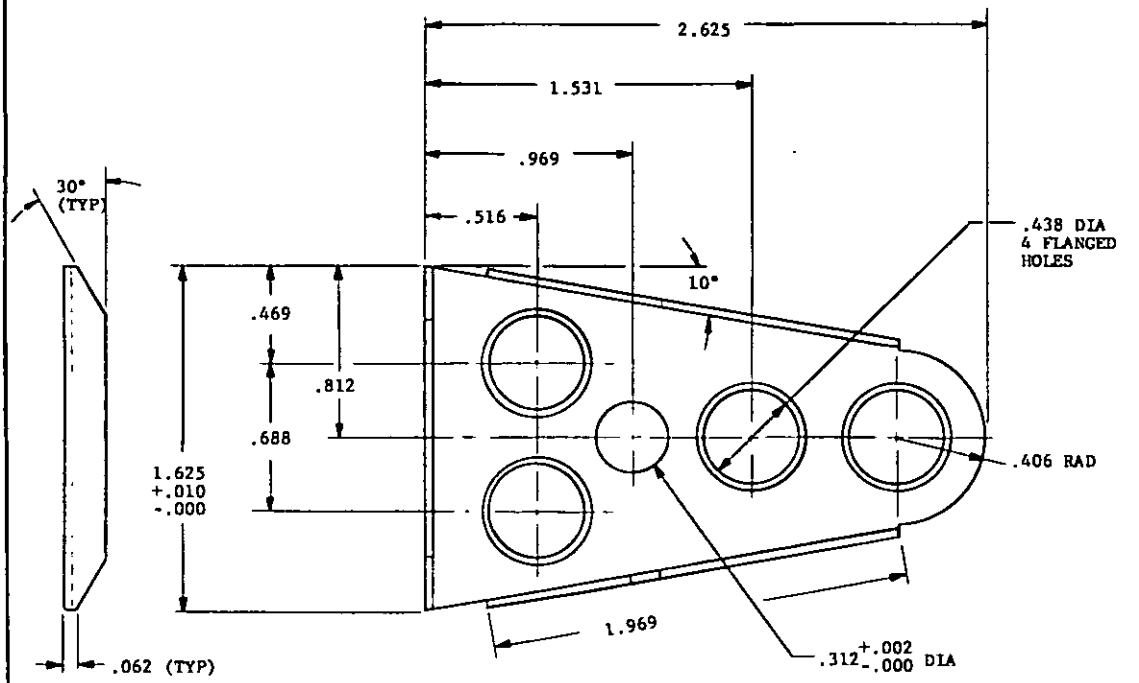

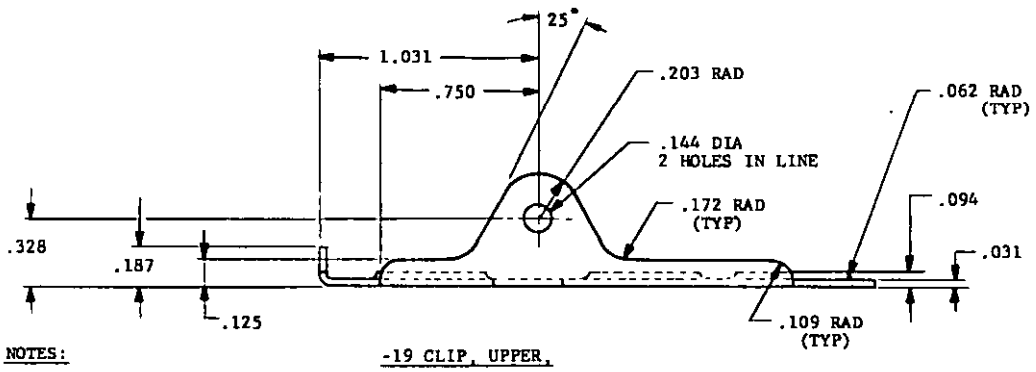

NOTES:

-19 CLIP, UPPER.

(C) 1. MATERIAL: STEEL, ASTM A606, COLD ROLLED, CONDITION AS ROLLED OR STEEL BARS, ASTM A108, GRADE 1020.

(C) 2. FINISH: CADMIUM PLATE, QQ-P-416, TYPE I, CLASS 1, OR ZINC PLATE, ASTM B663, FE/ZN 13, TYPE I OR NICKEL PLATE, MIL-C-26074, CLASS I, GRADE B.

3. ALL BENDS .016 RAD UNLESS OTHERWISE SPECIFIED.

4. REMOVE ALL BURRS.

APPROVED 30 APR 63 REVISED (C) FOR CHANGES SEE SHEETS 2,3,4,6 AND 7

USER SYMBOLS:

REVIEWER SYMBOLS:
USAF - 11,71
ARMY - GL

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. NAVY - AS Other Cust: ARMY - AV USAF - 99	TITLE: CONNECTOR, OXYGEN HOSE TO REGULATOR	MILITARY STANDARD MS22058
PROCUREMENT SPECIFICATION: MIL-C-19064	SUPERSEDES: AN6002, ACEL DWG 33H777, USAF 54B3735	SHEET 6 OF 7


DD FORM 1 MAR 72 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PLATE NO. 23065

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:45Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
1660

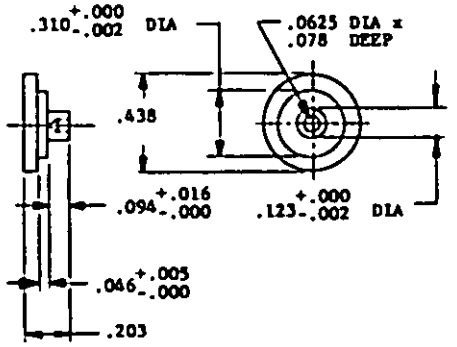


-20 STUD

NOTES:

(C) 1. MATERIAL: STEEL, ASTM A606, COLD ROLLED, CONDITION AS ROLLED OR STEEL BARS ASTM A108, GRADE 1020.

(C) 2. FINISH: CADMIUM PLATE, QQ-P-416, TYPE I, CLASS 1 OR ZINC PLATE, ASTM B663, FE/ZN 13, TYPE I OR NICKLE PLATE, MIL-C-26074, CLASS 1, GRADE B.

3. BREAK SHARP EDGES .005 MAX RAD.

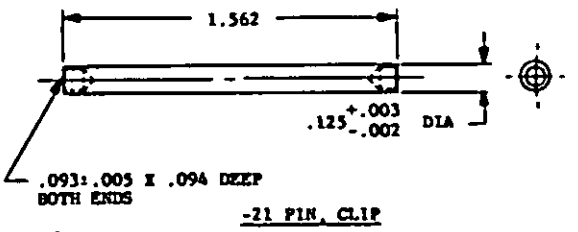

-21 PIN, CLIP


NOTES:

1. MATERIAL: BRASS, QQ-B-626, COMP 22, TEMPER 1/2 HARD.

2. OPTIONAL MATERIAL: BRASS TUBING, WW-T-791.

(C) 3. FINISH: ZINC PLATE, ASTM B663, FE/ZN-13, TYPE I.

(C) 4. OPTICIAL FINISH: CADMIUM PLATE, QQ-P-416, TYPE I, CLASS 1 OR NICKEL PLATE, MIL-C-26074, CLASS I, GRADE B.

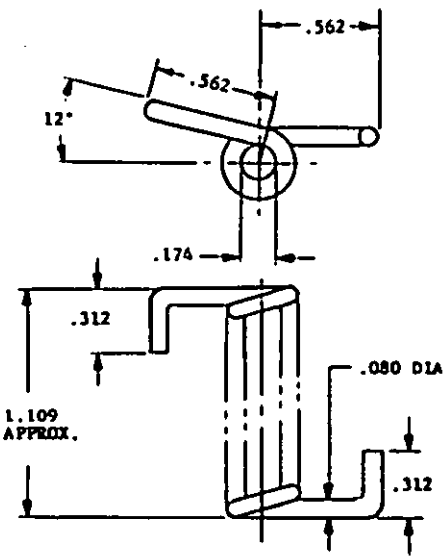

NOTES:


1. MATERIAL: STEEL MUSIC WIRE, QQ-W-470.


(C) 2. FINISH: CADMIUM PLATE, QQ-P-416 TYPE I, CLASS 1 OR ZINC PLATE, ASTM B663, FE/ZN 13, TYPE I OR NICKEL PLATE, MIL-C-26074, CLASS 1, GRADE B.

3. HEAT SPRING 500° TO 550°F FOR 20 MINUTES AFTER FORMING.

4. THIRTEEN TURNS CLOSE WOUND, LOAD NOT CRITICAL.

-22 SPRING CLIP

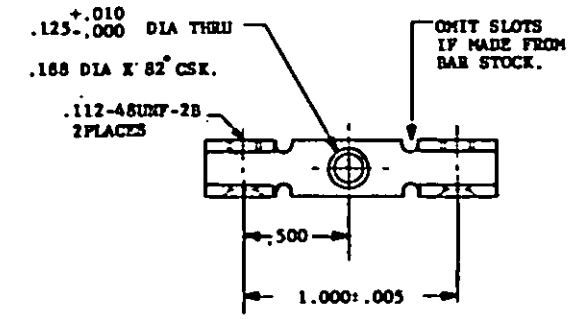

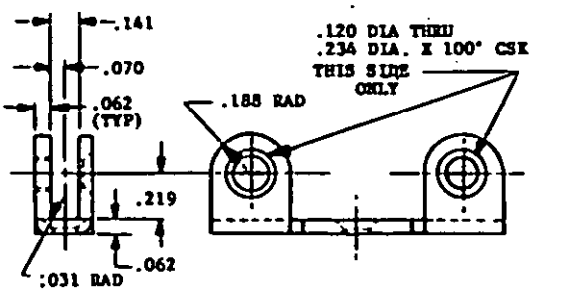

-23 YOKE

NOTES:

(C) 1. MATERIAL: STEEL, ASTM A606, COLD ROLLED, CONDITION AS ROLLED OR STEEL BARS ASTM A108, GRADE 1020.

(C) 2. FINISH: CADMIUM PLATE, QQ-P-416, TYPE I, CLASS 1 OR ZINC PLATE, ASTM B663, FE/ZN 13, TYPE I OR NICKEL PLATE, MIL-C-26074, CLASS 1, GRADE B.

3. BREAK SHARP CORNERS .005 MAX RAD

(C) 4. THREADS SHALL BE IN ACCORDANCE WITH FED-STD-H28.

USER SYMBOLS:

REVIEWER SYMBOLS:
USAF - 11.71
ARMY - GL

"Position/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Distribution for all engineering and design applications and for repetition are shall be made from this document

APPROVED 30 APR 63 REVISED (C) FOR CHANGES SEE SHEETS 2,3,4,6 AND 7

P.A. NAVY - AS Other Cust ARMY - AV USAF - 99	TITLE: CONNECTOR, OXYGEN HOSE TO REGULATOR	MILITARY STANDARD MS22058
PROCUREMENT SPECIFICATION MIL-C-19064	SUPERSEDES AN6002, ACEL DWG 33H777, USAF 54B3735	SHEET 7 OF 7

DD FORM 1 MAR 72 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PLATE NO. ZD08

U.S. GOVERNMENT PRINTING OFFICE: 1986 - 603-036/41008

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:45Z
Check the source to verify that this is the current version before use.