
FED SUP CLASS
4730

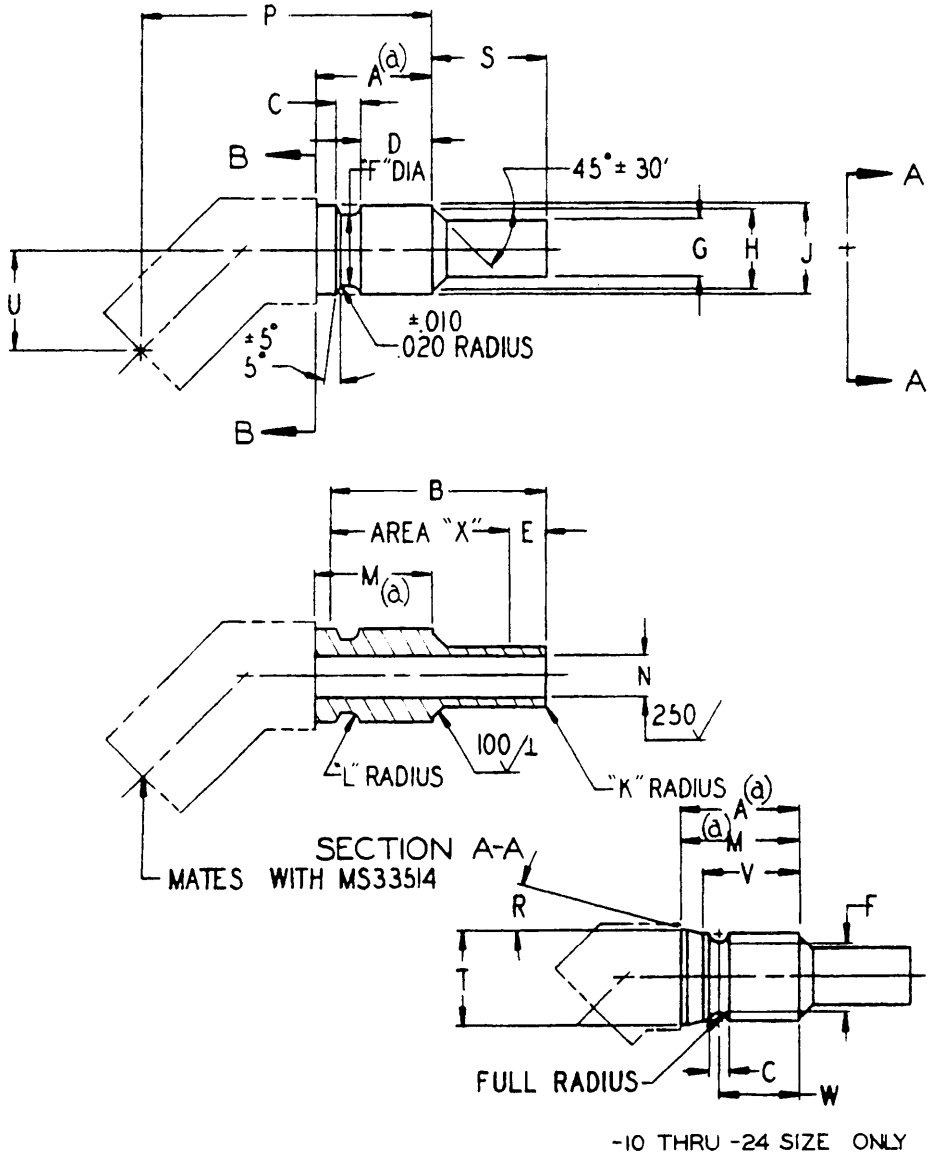

User Activities:
Army-WC, MC, MI

Review Activities:
Army-AV
Navy-AS
Air Force-82

APPROVED 2 May 66 REVISED (A) 30 Jun 72

Note: The Government has a royalty free license under the following listed patents for the benefit of Manufacturer of the item for the Government or for use in equipment to be delivered to the Government. (U.S. Patent Nos. 2,833,567; 3,044,163; 3,055,682)

The military standard is approved by the Department of Defense and is mandatory for all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

PA Air Force-11 Other Cust Army-AV Navy-AS (A)	TITLE ELBOW, FLARELESS, TUBE TO HOSE - 45° SWIVEL NUT	MILITARY STANDARD MS27395
Procurement Specification MIL-F-27272	SUPERSEDES	SHEET 1 OF 3

DD FORM 1 SEP 87 672 (Coordinated) previous editions ... obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:23Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
4730

DASH NO. STEEL	DASH NO. ALUM	"A" MIN	B MIN	C		D +.005 −.000	E		F		G +.005 −.000
(A) -3/-4C	——	.515	.870	.106	±.010	.307	.25	±.05	.288	+.005 −.000	.205
-4C	——										
-5C	——	.520	.890	.116		.322			.316		.268
-6C	——	.555							.391		.330
-8C	-8D	.630	1.030	.140	±.020	.335	.32	±.12	.497		.426
-10C	-10D	.654	1.130	.098	+.004 −.000	——	.35	±.15	.586		.526
-12C	-12D	.755	1.240	.128	+.005 −.000	——			.674		.650
-16C	-16D	.831	1.340			——	.39	±.19	1.001	+.008 −.000	.900
-20C	-20D	.881	1.570			——	.48	±.28	1.255		1.151
-24C	-24D	1.035	1.720			——	.50	±.30	1.490	+.005 −.000	1.401

H ±.005	J +.005 −.000	K		L ±.004	"M" MIN	N STEEL	N ALUM	N	P		"R" MAX
.295	.373	.015	+.005 −.000	.036	.485	.161	——	+.005 −.000	1.227	±.020	——
							——		1.219		——
.360	.416			.040	.501	.224	——		1.258		——
.425	.491				.521	.261	——		1.361		——
.530	.616	.020		.047	.583	.345	.345	+.006 −.000	1.877		——
.625	.706	.030	±.005	——	.620	.440	.440		1.674	±.035	——
.760	.826			——	.720	.560	.560		2.114		15° 30'
1.040	1.150			——	.796	.828	.828		2.188		10° 30'
1.275	1.405			——	.846	1.058	1.058		2.445		15° 30'
1.550	1.635	.035		——	1.000	1.253	1.282	±.005 .050	2.849		

S		"T" MAX	U		V		"W" +.005 −.000 STEEL	"W" +.005 −.000 ALUM
.480	± .010	——	.432	±.020	——	——	——	——
		——	.424		——	——	——	——
		——	.448		——	——	——	——
		——	.526		——	——	——	——
.600		——	.622		——	——	——	——
.650	± .015	——	.725	±.035	——	——	.420	.427
.675	± .025	.900	.800		.625	±.010	.500	.500
.730		1.190	.854		.670		.545	.545
.935		1.485	.962		.695		.565	.571
.980		1.750	1.155		.795		.665	.665

APPROVED 2 May 66 REVISED (A) FOR CHANGES SEE SHEETS 1, 2 AND 3.

NOTE: The Government has a royalty free license under the following listed patents for the benefit of Manufacturers of the item either for the Government or for use in equipment to be delivered to the Government. (U.S. Patent Nos. 2,833,567; 3,044,163; 3,055,682)

User Activities:
Army - WC, ME, MI

Review Activities:
Army - AV
Navy - AS
Air Force - 82

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

PA Air Force - 11 (A) Other Cust Army - AV Navy - AS	ELBOW, FLARELESS, TUBE TO HOSE - 45° SWIVEL NUT	MILITARY STANDARD MS27395
Procurement Specification MIL-F-27272	SUPERSEDES	SHEET 2 OF 3

DD FORM SEP 67 672 Coordinated

Source: https://assist.dla.mil -- Downloaded: 202610-23T15:23Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
4730

MATERIAL CORROSION RESISTING STEEL , CLASS 304 OR 321 COLD FIN CONDITION "A" SPECIFICATION QQ-S-763
ALUMINUM ALLOY : 6061-T6 OR T651
SPECIFICATION QQ-A-367 OR QQ-A-225/8

FINISH CORROSION RESISTING STEEL ; PASSIVATE PER MIL-F-27272.
ALUMINUM ALLOY : ANODIZE, SPECIFICATION MIL-A-8625 TYPE II, DYE YELLOW.

DRY FILM LUBRICATE AREA "X" IN ACCORDANCE WITH MIL-L-8937, NO OVERSPRAY ALLOWED.

(A) DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED : RADIUS OR BREAK ALL CORNERS .005 + .005 -.000. REMOVE ALL BURRS AND SLIVERS. SURFACE ROUGHNESS PER ANSI B46.1- 1962 NOT TO EXCEED 125 AA . ALL DIAMETERS WITHIN LENGTH "A" PLUS "S" MUST BE CONCENTRIC WITHIN .005 TIR.

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.

THIS IS A DESIGN STANDARD FOR MANUFACTURING PURPOSES THE ITEM IS ONLY PROCURED AS AN INTEGRAL PART OF ADAPTER ASSEMBLIES.

(a) USE "A" DIM. WHEN THE ADJACENT DIA TO THE LEFT OF PLANE B-B IS GREATER THAN "J" DIM. WHEN THE ADJACENT DIA IS EQUAL TO OR LESS THAN "J" DIM. "M" DIM. MAY BE USED IN PLACE OF "A" DIM.

THE BORE OF THE ELBOW, -10 THRU -24 SIZE, SHALL NOT BE LESS THAN THE ID OF THE NIPPLE. OVALITY SHALL NOT EXCEED 7.5 PERCENT OF NOMINAL TUBING OD.

ANY DESIGN OF THE ELBOW TO THE LEFT OF PLANE B-B IS ACCEPTABLE PROVIDED DIM'S "P" AND "U" THE MATERIALS SPECIFIED AND THE FABRICATION NOTES OF THIS STANDARD ARE MET.

(A) ANY FORGED DESIGN IS ACCEPTABLE FOR 3/4 THRU 8 SIZE. ANY BENT TUBE DESIGN IS ACCEPTABLE FOR -10 THRU -24 SIZE.

(A) NEXT ASSEMBLY MS27389-3/4 THRU -8 SIZE AND MS27387-10 THRU -24 SIZE.

APPROVED 2 May 66 REVISED (A) FOR CHANGES SEE SHEETS 1, 2 AND 3 .

User Activities:
Army-WC, ME, MI

Review Activities:
Army-AV
Navy-AS
Air Force-82

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. Air Force-11 (A) Other Cust Army-AV Navy-AS	TITLE ELBOW, FLARELESS, TUBE TO HOSE - 45° SWIVEL NUT	MILITARY STANDARD MS27395
Procurement Specification MIL-F-27272	SUPERSEDES	SHEET 3 OF 3

DD FORM 1 SEP 67 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

DATE

NOTE: The Government has a royalty free license under the following listed patents for the benefit of Manufacturers of the item either for the Government or for use in equipment to be delivered to the Government. (U.S. Patent Nos. 2,833,567; 3,044,163; 3,055,682)

Source: https://assist.dla.mil -- Downloaded: 202610-23T15:23Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:23Z
Check the source to verify that this is the current version before use.