
FED. SUP CLASS
6610

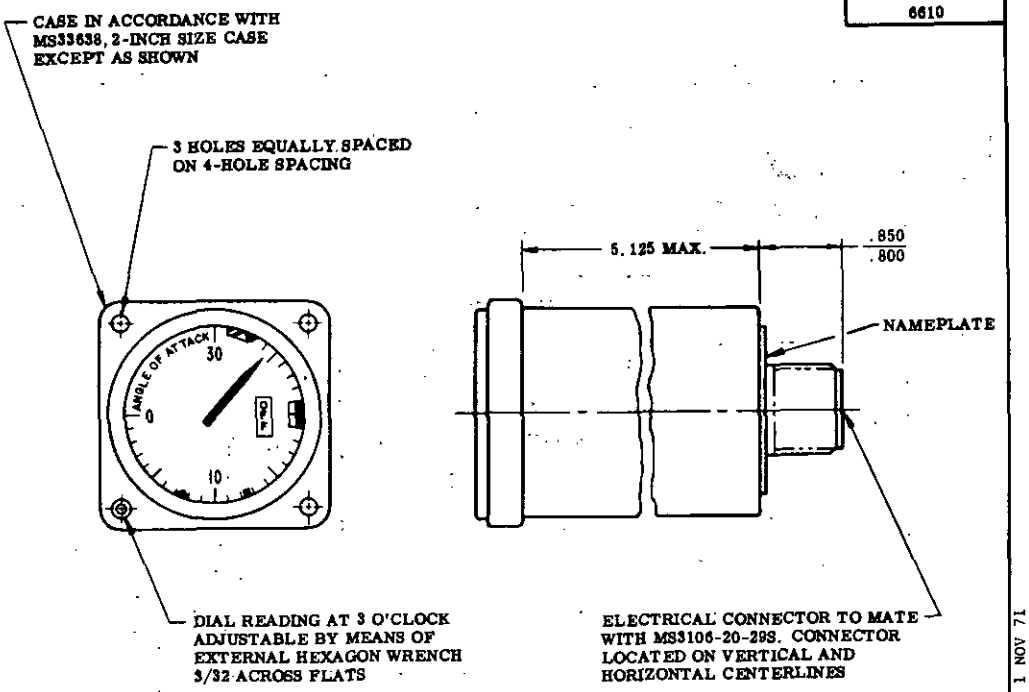

PART NO.	DESCRIPTION	WEIGHT
MS28067-2	UNLIGHTED(WIRING DIAGRAM SHEET 2)	1.6 LB MAX

NOTES:

1. DIMENSIONS IN INCHES.
2. DIAL AND INDICES SHOWN FOR REFERENCE ONLY. SEE PROCUREMENT SPECIFICATION FOR DETAIL REQUIREMENTS.

MS28067-1 CANCELLED. NO SUPERSEDING STANDARD

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 8 DEC 1965 REVISED (A) 2 MAY 1980 (B) 27 OCT 1969 (C) 1 NOV 71

(C) REVISED

P.A. NAVY - AS Other Cust USAF - 71 ARMY - AV	TITLE INDICATOR, ANGLE OF ATTACK 1-7/8 DIAL, 28 VOLT D. C.	MILITARY STANDARD MS28067
PROCUREMENT SPECIFICATION MIL-I-18856	SUPERSEDES: MS28067 (AS)	SHEET 1 OF 7

DD FORM 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. PLATE

USER SYMBOLS:


REVIEWER SYMBOLS:

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:56Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
6610

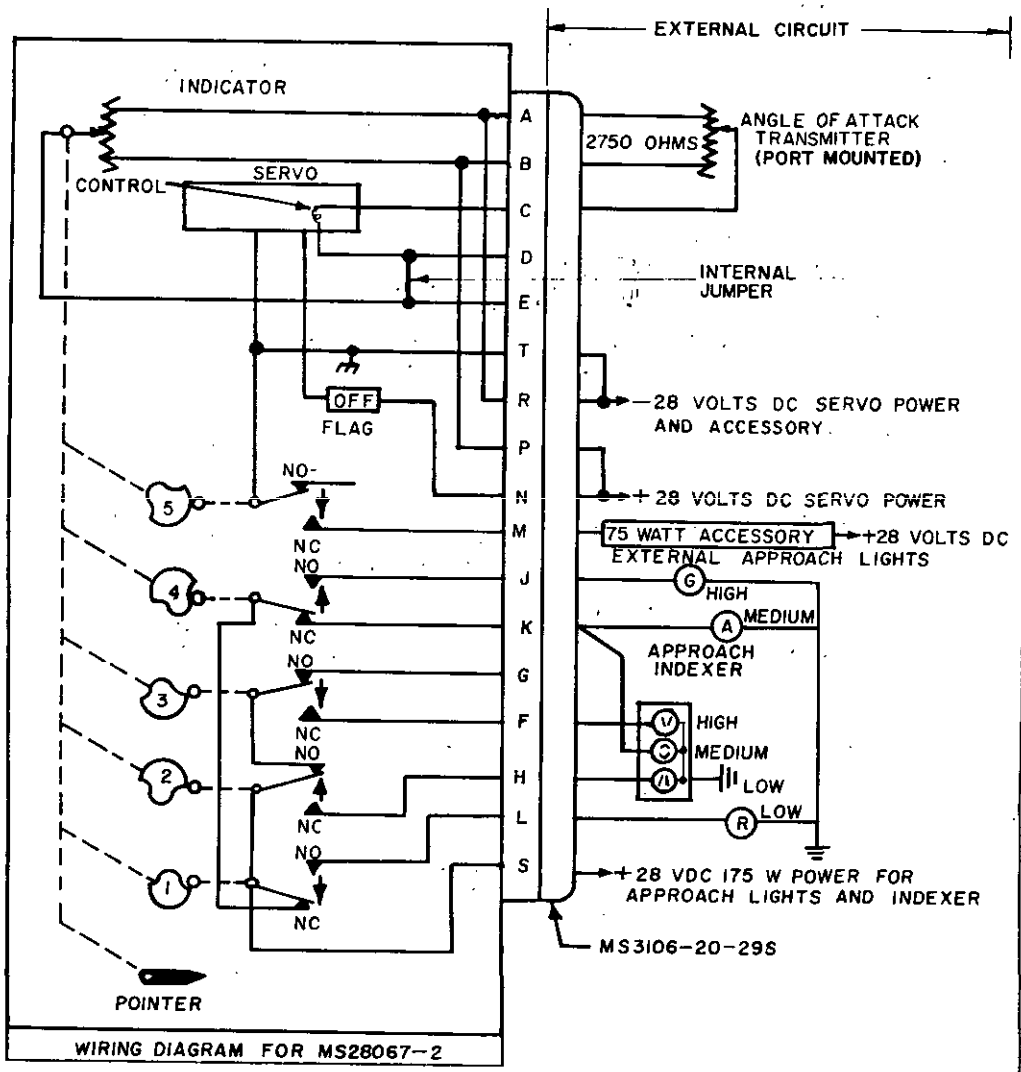

WIRING DIAGRAM FOR MS28067-2

NOTES:

1 CAMS ARE NUMBERED 1 THROUGH 5 STARTING FROM DIAL END.

2.POSITION OF CAMS IS SHOWN FOR THE INDICATOR POINTER AT THE "3 O'CLOCK" POSITION.

3.EXTERNAL CIRCUIT NOT PART OF INDICATOR.

APPROVED : DEC 1 : REVISED (C) FOR CHANGES SEE SHEET 1

P.A. NAVY - AS Other Cust USAF - 71 ARMY - AV	TITLE INDICATOR, ANGLE OF ATTACK 1-7/8 DIAL, 28 VOLT D.C.	MILITARY STANDARD MS 28067 SHEET 2
PROCUREMENT SPECIFICATION MIL-I-18856	SUPERSEDES MS28067(AS)	

DD FORM 1 SEP 67 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PLATE NO. 13709

USER SYMBOLS:


REVIEWER SYMBOLS:

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repairing use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:56Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
6610

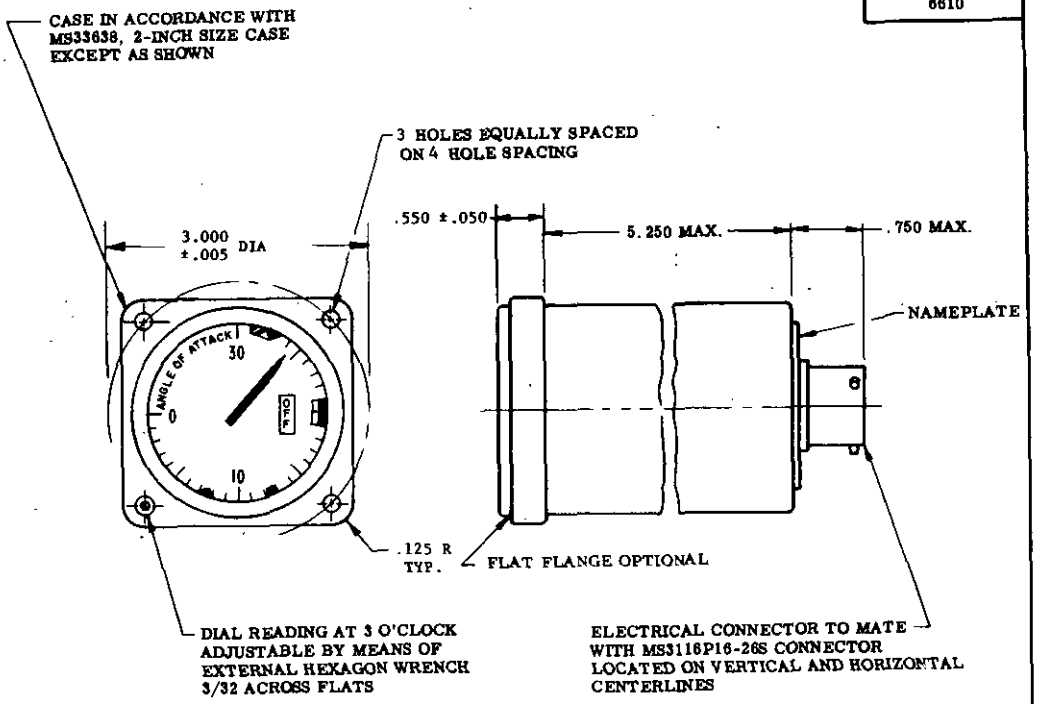

ANA TYPE NO.	PART NO.	DESCRIPTION	WEIGHT
ARK-10/A24G-8	MS28067-2	RED LIGHTED (WIRING DIAGRAM SHEET 4)	1.7 LB
ARK-10A/A24G-8	MS28067-3A	RED LIGHTED (WIRING DIAGRAM SHEET 5) HIGH IMPEDANCE SERVO INPUT 100 KIL-OHM MIN	1.7 LB

NOTE:

1. USE MS28067-3A FOR DUAL INDICATOR OPERATION FROM ONE POTENTIOMETER INPUT SIGNAL WITHOUT INTERACTION BETWEEN INDICATORS.
2. MS28067-3A CAN REPLACE MS28067-3 IN SINGLE INDICATOR INSTALLATIONS.

APPROVED 6 DEC 1955 REVISED (C) FOR CHANGES SEE SH 1

USER SYMBOLS:

REVIEWER SYMBOLS:

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. NAVY - AS Other Cust USAF - 71 ARMY - AV	TITLE INDICATOR, ANGLE OF ATTACK 1-7/8 DIAL, 28 VOLT D.C.	MILITARY STANDARD MS28067
PROCUREMENT SPECIFICATION MIL-I-18856	SUPERSEDES: MS28067 (AS)	SHEET 3


DD FORM 1 SEP 67 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PLATE NO. 17709

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:56Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
6610

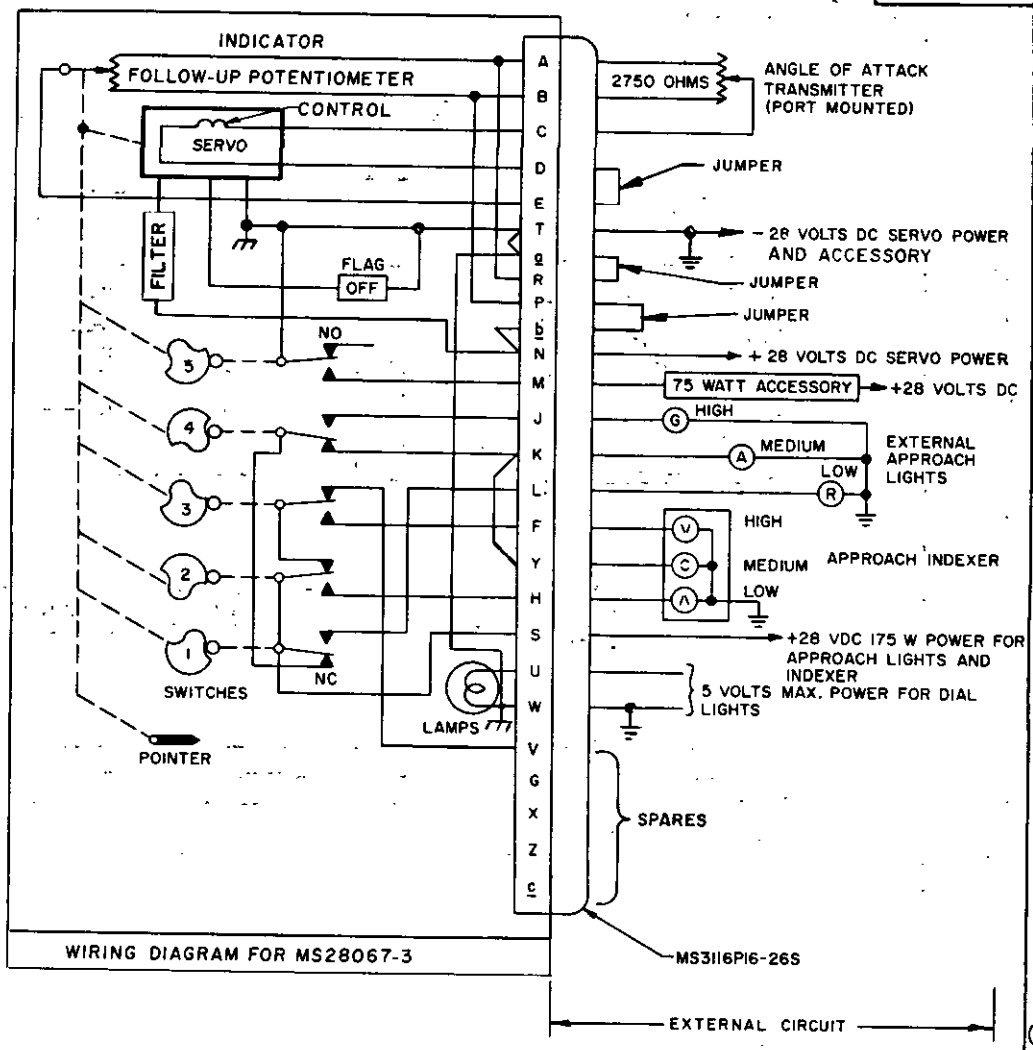

WIRING DIAGRAM FOR MS28067-3

NOTES:

1. CAMS ARE NUMBERED 1 THROUGH 5 STARTING FROM DIAL END.
2. POSITION OF CAMS IS SHOWN FOR THE INDICATOR AT THE "3 O'CLOCK" POSITION.
3. EXTERNAL CIRCUIT NOT PART OF INDICATOR.

APPROVED 8 DEC 1955 REVISED © FOR CHANGES SEE SH 1


P.A. (NAVY - AS) Other Cust (USAF - 97JS) (ARM - AVN)	TITLE: INDICATOR, ANGLE OF ATTACK 1-7/8 DIAL, 28 VOLT D.C.	MILITARY-STANDARD MS28067
PROCUREMENT SPECIFICATION: MIL-I-18856	SUPERSEDES: MS28067(AS)	SHEET 4

DD FORM 1 SEP 57 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. PLATE NO. 17704

USER SYMBOLS:
REVIEWER SYMBOLS:
"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."
This military standard is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:56Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
6610

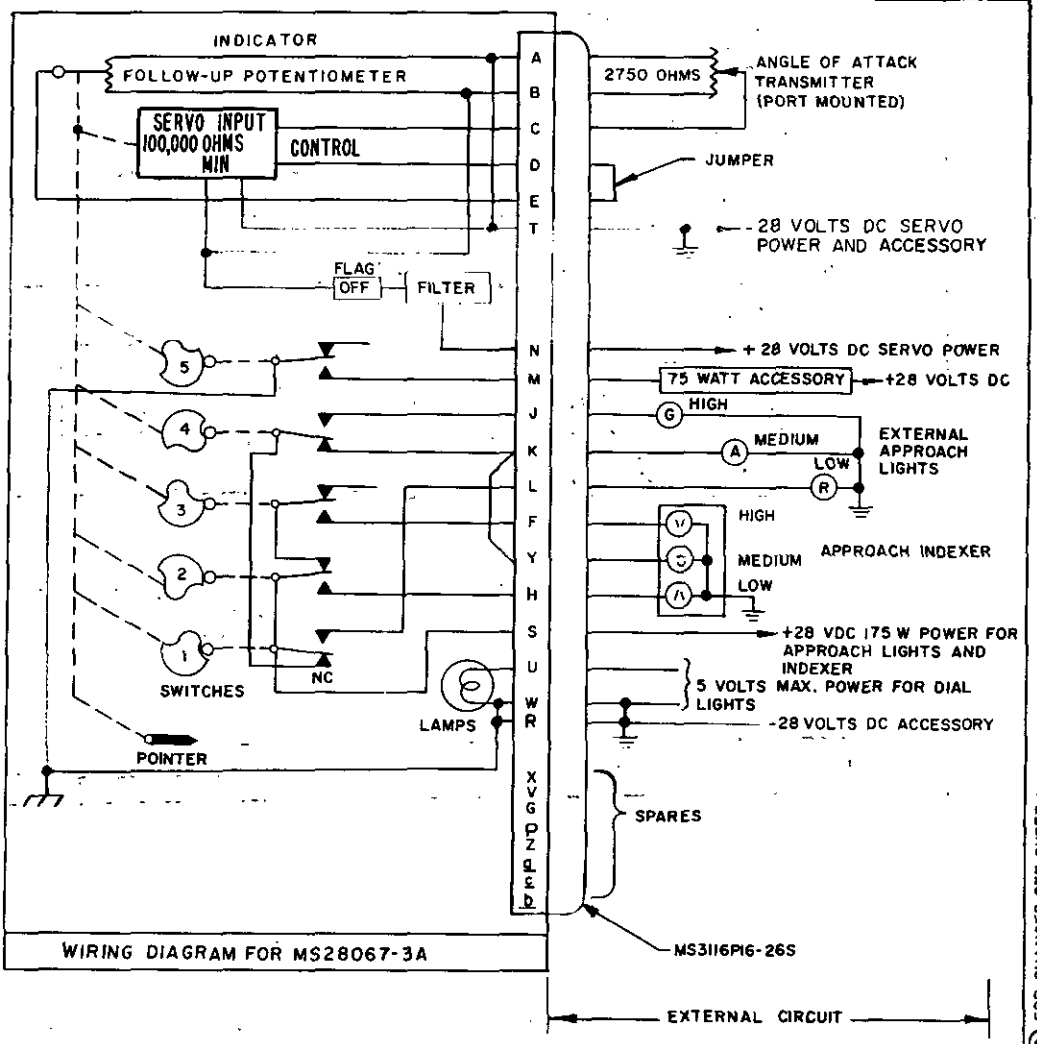

WIRING DIAGRAM FOR MS28067-3A

NOTES:

1. CAMS ARE NUMBERED 1 THRU 5 STARTING FROM DIAL END.
2. POSITION OF CAMS IS SHOWN FOR THE INDICATOR AT THE "3 O'CLOCK" POSITION.
3. EXTERNAL CIRCUIT NOT PART OF INDICATOR.

APPROVED 8 DEC 1955. REVISED © FOR CHANGES SEE SHEET 1

USER SYMBOLS:

REVIEWER SYMBOLS:

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.


P.A. NAVY – AS Other Cust USAF – 71 ARMY – AV	TITLE INDICATOR, ANGLE OF ATTACK 1-7/8 DIAL, 28 VOLT D. C.	MILITARY STANDARD MS28067
PROCUREMENT SPECIFICATION MIL-I-18856	SUPERSEDES: MS28067(AS)	SHEET 5

DD FORM 1 SEP 57 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. PLATE NO. 17709

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:56Z
Check the source to verify that this is the current version before use.

USER SYMBOLS:
REVIEWER SYMBOLS:
"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."
This military standard is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

FED. SUP CLASS
6610

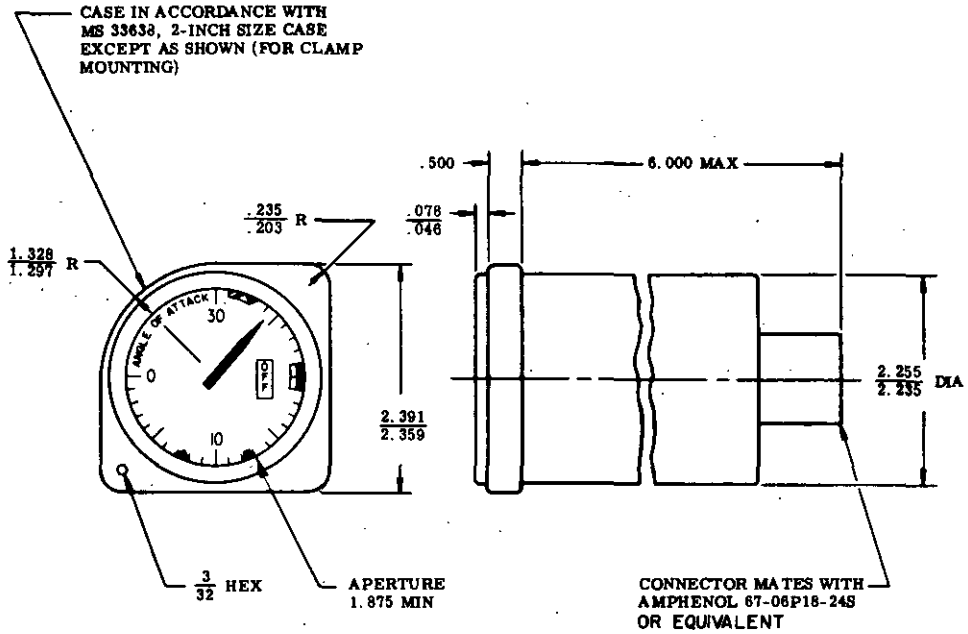

ANA TYPE NO.	PART NO	DESCRIPTION	WEIGHT
ARU-23/A	MS28067-4	RED LIGHTED (WIRING DIAGRAM SHEET 7)	1.75 LB MAX

NOTE:

1. USED ONLY IN MODEL A-6 AIRCRAFT. MS28067-4 IS EQUIVALENT TO GRUMMAN AIRCRAFT ENGINEERING CORP PART NO. 128SCAV112-1.

APPROVED 8 DEC 1955 REVISED © FOR CHANGES SEE SH 1

P.A. NAVY - AS Other Cust USAF - 71 ARMY - AV	TITLE INDICATOR, ANGLE OF ATTACK 1-7 8 DIAL, 28 VOLT D.C.	MILITARY STANDARD MS28067
PROCUREMENT SPECIFICATION MIL-I-18856	SUPERSEDES MS28067(AS)	SHEET 6


DD FORM 1 SEP 57 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PLATE NO. 12709

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:56Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
6610

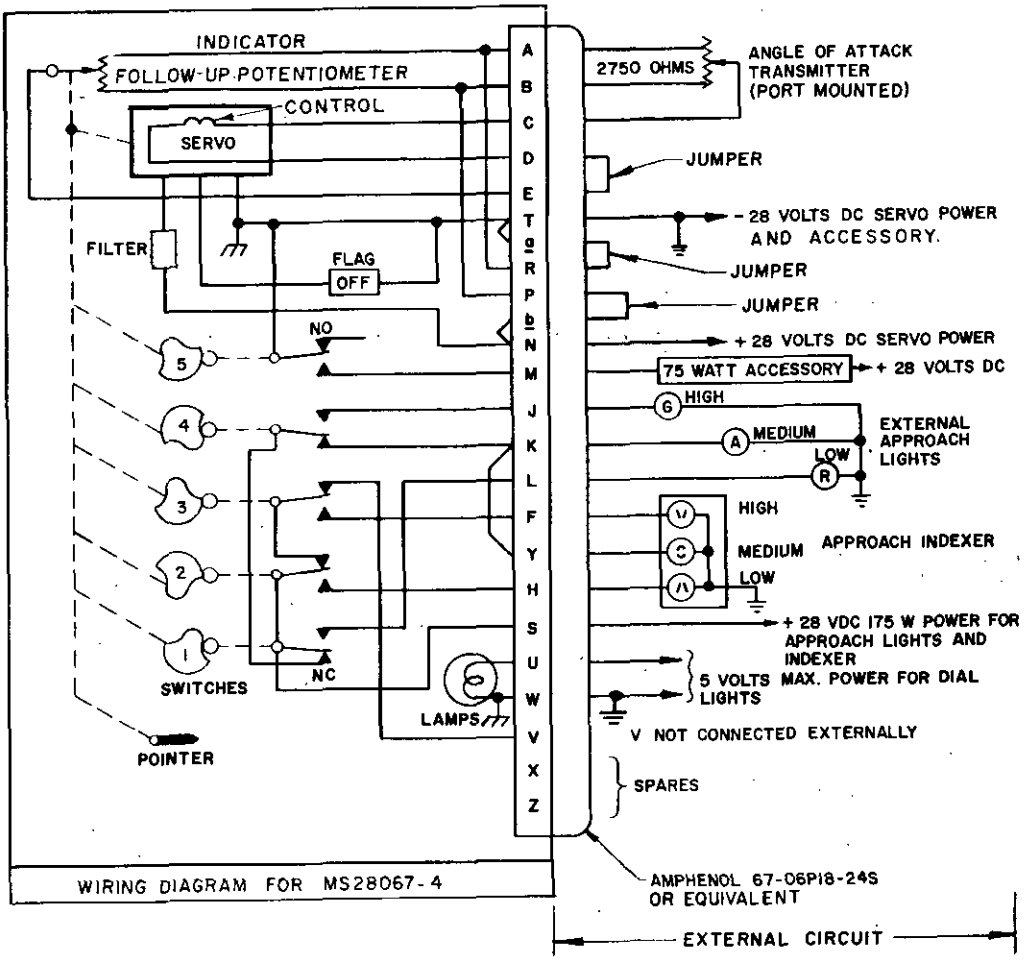

WIRING DIAGRAM FOR MS28067-4

NOTES:

1. CAMS ARE NUMBERED 1 THROUGH 5 STARTING FROM DIAL END.
2. POSITION OF CAMS IS SHOWN FOR THE INDICATOR AT THE "3 O'CLOCK" POSITION.
3. EXTERNAL CIRCUIT NOT PART OF INDICATOR.

☆ U. S. GOVERNMENT PRINTING OFFICE: 1971-714-160 3422

APPROVED 8 DEC 1955 REVISED (C) FOR CHANGES SEE SH 1

P.A. NAVY - AS
Other Cust
USAF - 71
ARMY - AV

TITLE
INDICATOR, ANGLE OF ATTACK
1-7/8 DIAL, 28 VOLT D.C.

MILITARY STANDARD
MS28067
SHEET

PROCUREMENT SPECIFICATION
MIL-I-18856

SUPERSEDING
MS28067(AS)

DD FORM 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PLATE NO. 17708

USER SYMBOLS:

REVIEWER SYMBOLS:

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:56Z
Check the source to verify that this is the current version before use.