THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-V-19069

Form approved
OMB No. 0704-0188

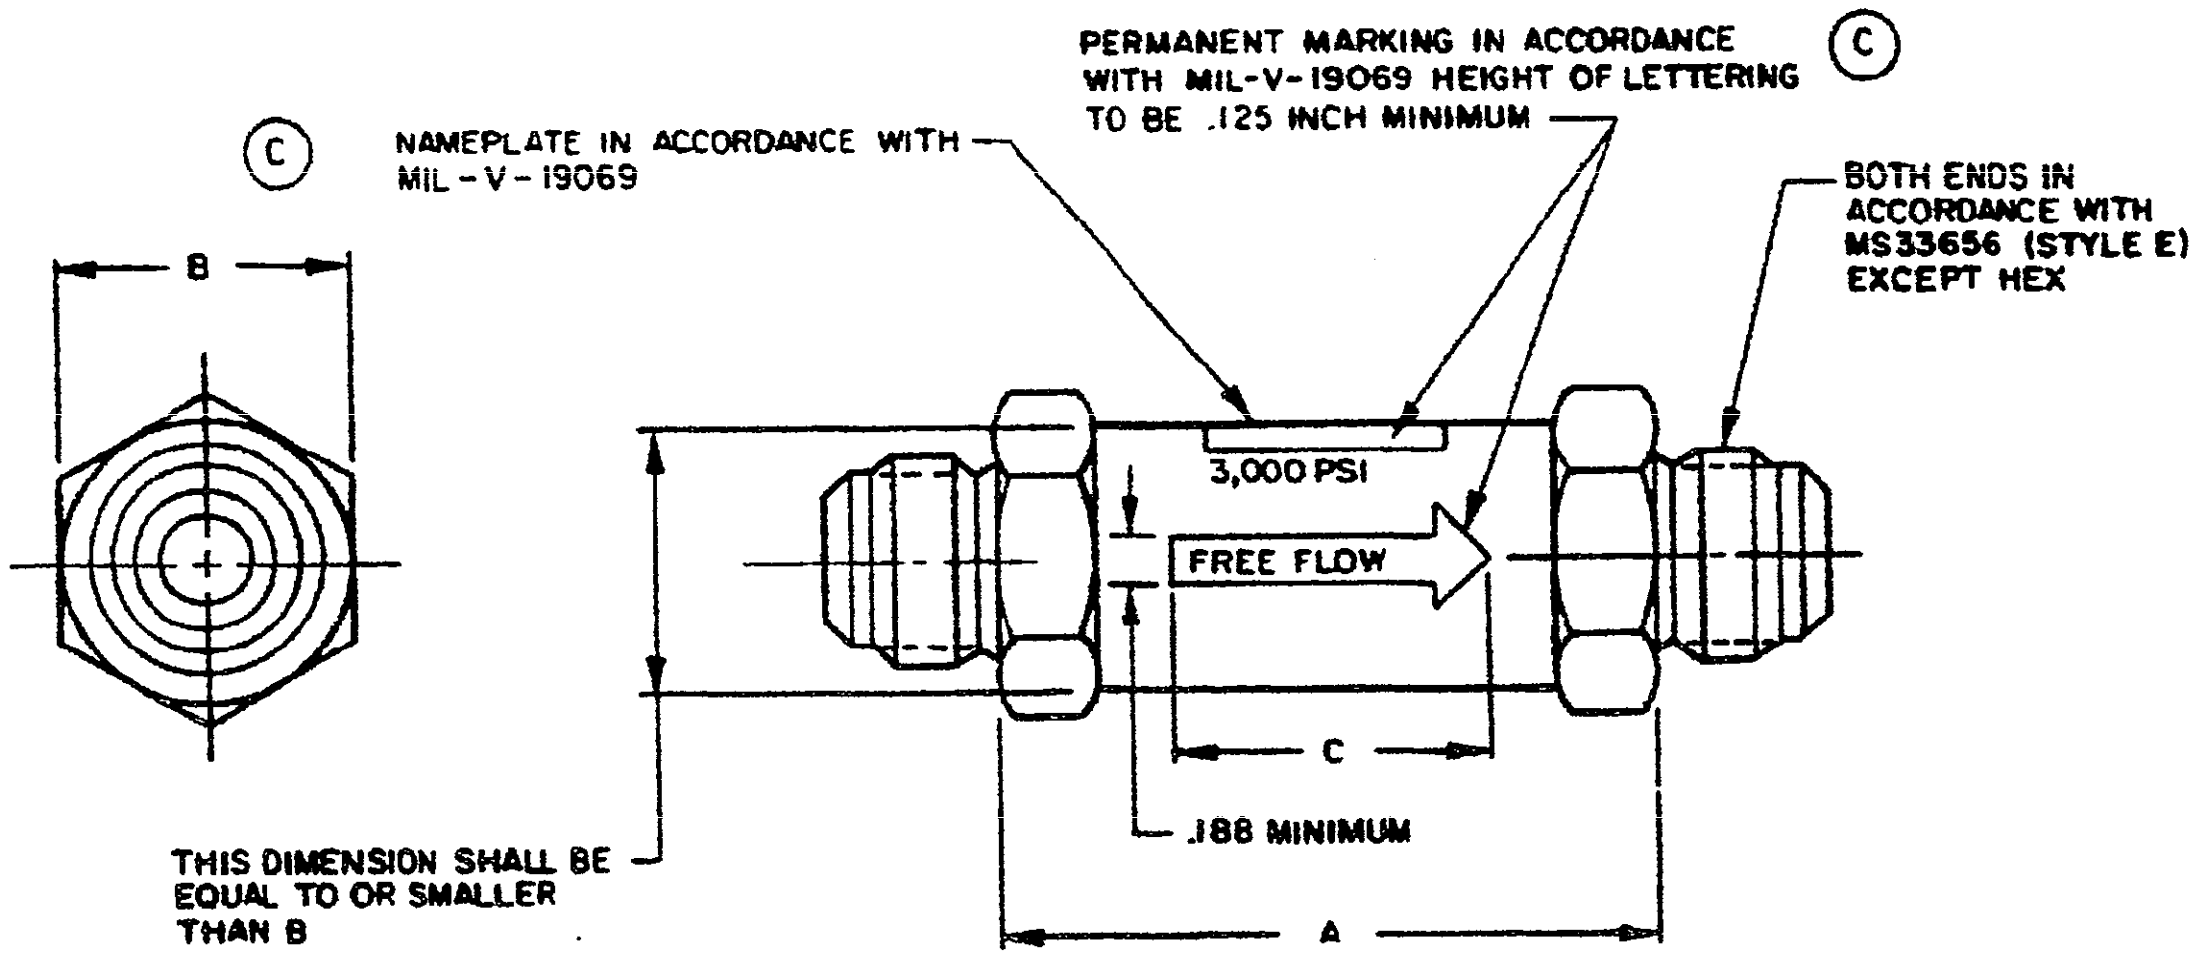
Ⓒ
PERMANENT MARKING IN ACCORDANCE WITH MIL-V-19069 HEIGHT OF LETTERING TO BE .125 INCH MINIMUM
Ⓒ
NAMEPLATE IN ACCORDANCE WITH MIL-V-19069
BOTH ENDS IN ACCORDANCE WITH MS33656 (STYLE E) EXCEPT HEX
B
3,000 PSI
FREE FLOW
C
.188 MINIMUM
THIS DIMENSION SHALL BE EQUAL TO OR SMALLER THAN B
A

TABLE I. DASH NUMBERS AND DIMENSIONS. Ⓒ

DASH NO.		TUBING OD Ⓒ	RATED FLOW CAPACITY GPM	A ±.031	B		C MIN
CRES	ALUMINUM						
-4SS	-4AL	.250	1.2	1.531	.688	+.003 -.006	.875
-5SS	-5AL	.313	2.3	1.750	.813		1.000
-6SS	-6AL	.375	3.5				
-8SS	-8AL	.500	6.0	2.219	1.063		
-10SS	-10AL	.625	10.5	2.406	1.125		
-12SS	-12AL	.750	16.0	2.750	1.438		
-16SS	-16AL	1.000	29.0	3.312	1.688	+.008 -.016	

REQUIREMENTS:

1. MATERIALS: CRES - AS SPECIFIED IN MIL-H-8775 AND IN ACCORDANCE WITH ASTM-A-582, CLASS 304.
   ALUMINUM - AS SPECIFIED IN MIL-H-8775.
2. FINISH: CRES - AS SPECIFIED IN MIL-H-8775 AND PASSIVATED IN ACCORDANCE WITH QQ-P-35.
   ALUMINUM - AS SPECIFIED IN MIL-H-8775 AND IN ACCORDANCE WITH QQ-A-225/9 (7075), TEMPER T-73.

NOTES:

1. DIMENSIONS ARE IN INCHES.
2. EXAMPLE OF PART NUMBER:

   MS28771 - 6 AL
   "SS" INDICATES CRES, "AL" INDICATES ALUMINUM
   DASH NUMBER INDICATES SIZE
   BASIC MILITARY SPECIFICATION SHEET NUMBER Ⓒ
3. AT OPTION OF MANUFACTURER, DIMENSION "B" MAY BE MADE TO CONFORM TO DIMENSION "E" OF MS33656.
4. FOR DESIGN FEATURE PURPOSES, THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. Ⓒ
5. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS, OR REQUEST FOR PROPOSAL, EXCEPT THAT REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED.

Ⓒ DENOTES CHANGES

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

PREPARING ACTIVITY: AS Ⓒ
CUSTODIANS: ARMY- NAVY-AS
AIR FORCE-99 DLA-
REVIEW: ARMY-MI, AIR FORCE-99 Ⓒ
USER: ARMY-ME, DLA-CS
PROJECT NUMBER: 1650-0451

MILITARY SPECIFICATION SHEET

TITLE
VALVE, CHECK, HYDRAULIC, FLARED, 3,000 PSI, TYPE II SYSTEMS

SPECIFICATION SHEET NUMBER
MS28771C 28 MAR 1991
SUPERSEDING
MS28771B 1 MAY 1986
AMSC- N/A FSC 1650

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Page 1 of 1

DD FORM 672 MAY 1988 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 202610-23T16:59Z
Check the source to verify that this is the currentversion before use.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-V-19069

Form approved
OMB No. 0704-0188

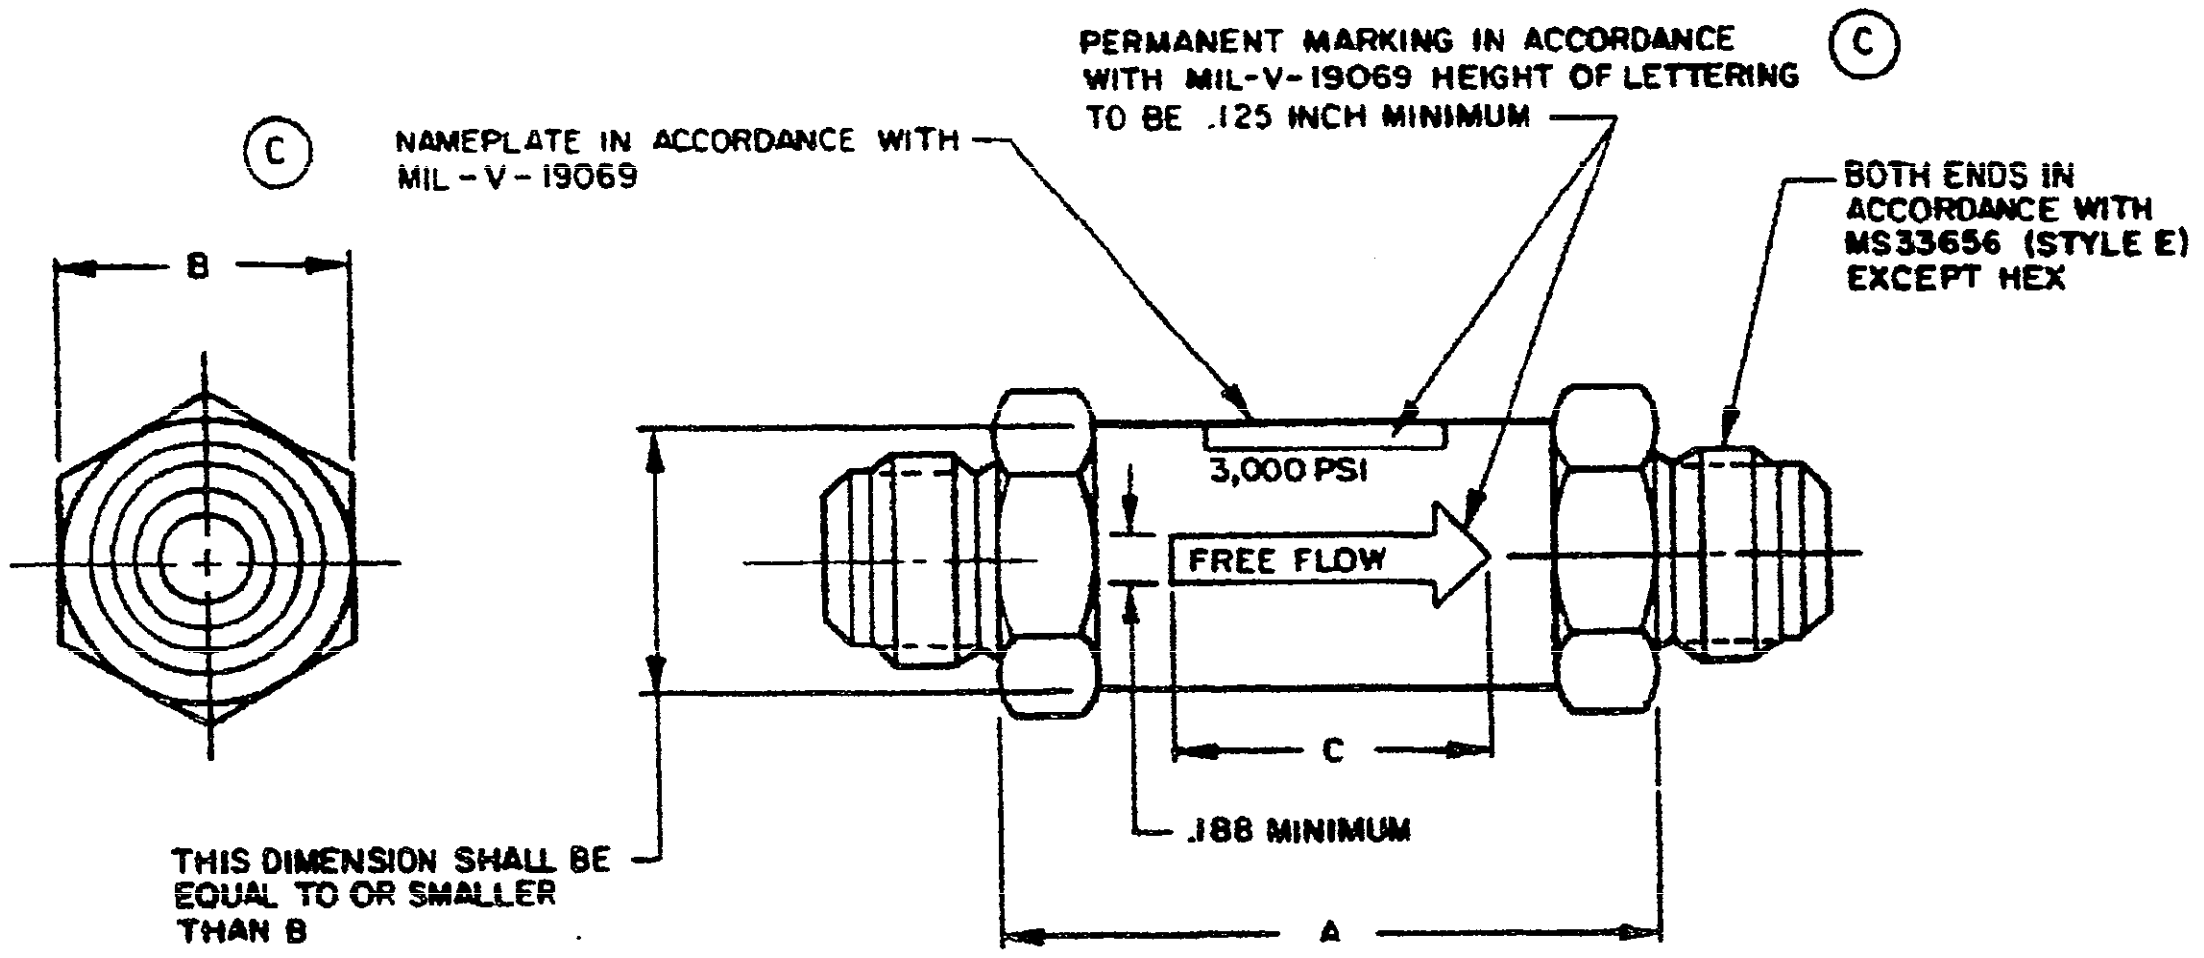
Ⓒ NAMEPLATE IN ACCORDANCE WITH MIL-V-19069
PERMANENT MARKING IN ACCORDANCE WITH MIL-V-19069 HEIGHT OF LETTERING TO BE .125 INCH MINIMUM Ⓒ
BOTH ENDS IN ACCORDANCE WITH MS33656 (STYLE E) EXCEPT HEX
B
3,000 PSI
FREE FLOW
C
.188 MINIMUM
A
THIS DIMENSION SHALL BE EQUAL TO OR SMALLER THAN B

TABLE I. DASH NUMBERS AND DIMENSIONS. Ⓒ

DASH NO.		TUBING OD Ⓒ	RATED FLOW CAPACITY GPM	A ±.031	B		C MIN
CRES	ALUMINUM						
-4SS	-4AL	.250	1.2	1.531	.688	+.003 -.006	.875
-5SS	-5AL	.313	2.3	1.750	.813		1.000
-6SS	-6AL	.375	3.5				
-8SS	-8AL	.500	6.0	2.219	1.063		
-10SS	-10AL	.625	10.5	2.406	1.125		
-12SS	-12AL	.750	16.0	2.750	1.438		
-16SS	-16AL	1.000	29.0	3.312	1.688	+.008 -.016	

REQUIREMENTS:

1. MATERIALS: CRES - AS SPECIFIED IN MIL-H-8775 AND IN ACCORDANCE WITH ASTM-A-582, CLASS 304.
   ALUMINUM - AS SPECIFIED IN MIL-H-8775.
2. FINISH: CRES - AS SPECIFIED IN MIL-H-8775 AND PASSIVATED IN ACCORDANCE WITH QQ-P-35.
   ALUMINUM - AS SPECIFIED IN MIL-H-8775 AND IN ACCORDANCE WITH QQ-A-225/9 (7075), TEMPER T-73.

NOTES:

1. DIMENSIONS ARE IN INCHES.
2. EXAMPLE OF PART NUMBER:

```
MS28771 - 6 AL
   |      |  |_______ "SS" INDICATES CRES, "AL" INDICATES ALUMINUM
   |      |__________ DASH NUMBER INDICATES SIZE
   |_________________ BASIC MILITARY SPECIFICATION SHEET NUMBER Ⓒ
```

3. AT OPTION OF MANUFACTURER, DIMENSION "B" MAY BE MADE TO CONFORM TO DIMENSION "E" OF MS33656.
4. FOR DESIGN FEATURE PURPOSES, THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. Ⓒ
5. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS, OR REQUEST FOR PROPOSAL, EXCEPT THAT REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED.

Ⓒ DENOTES CHANGES

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

PREPARING ACTIVITY: AS Ⓒ
CUSTODIANS: ARMY– NAVY–AS
AIR FORCE–99 DLA–
REVIEW: ARMY-MI, AIR FORCE-99 Ⓒ
USER: ARMY-ME, DLA-CS
PROJECT NUMBER: 1650-0451

MILITARY SPECIFICATION SHEET

TITLE
VALVE, CHECK, HYDRAULIC, FLARED, 3,000 PSI, TYPE II SYSTEMS

SPECIFICATION SHEET NUMBER
MS28771C 28 MAR 1991

SUPERSEDING
MS28771B 1 MAY 1986

AMSC– N/A FSC 1650

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:59Z
Check the source to verify that this is the current version before use.