INCH-POUND

MS3127L
w/AMENDMENT 2
19 October 2017
SUPERSEDING
MS3127L
w/AMENDMENT 1
29 April 2009

DETAIL SPECIFICATION SHEET

CONNECTORS, RECEPTACLE, ELECTRICAL, SERIES 1, CRIMP TYPE, BOX MOUNTING, FLANGE, NO. 4/6 HOLES, BAYONET COUPLING, CLASS E

Inactive for new design as of 5 September 1975.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-26482.

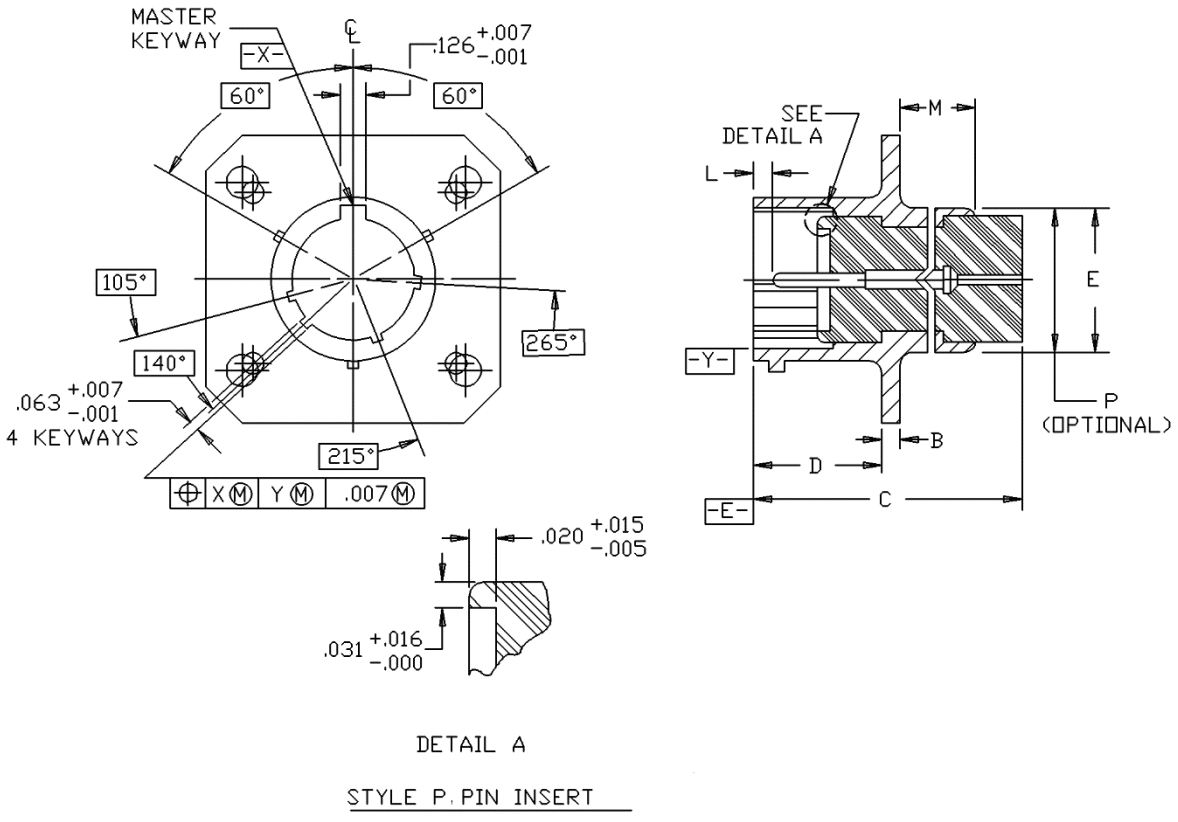


FIGURE 1. Receptacle, dimensions, class E.

AMSC N/A

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:59Z
Check the source to verify that this is the current version before use.

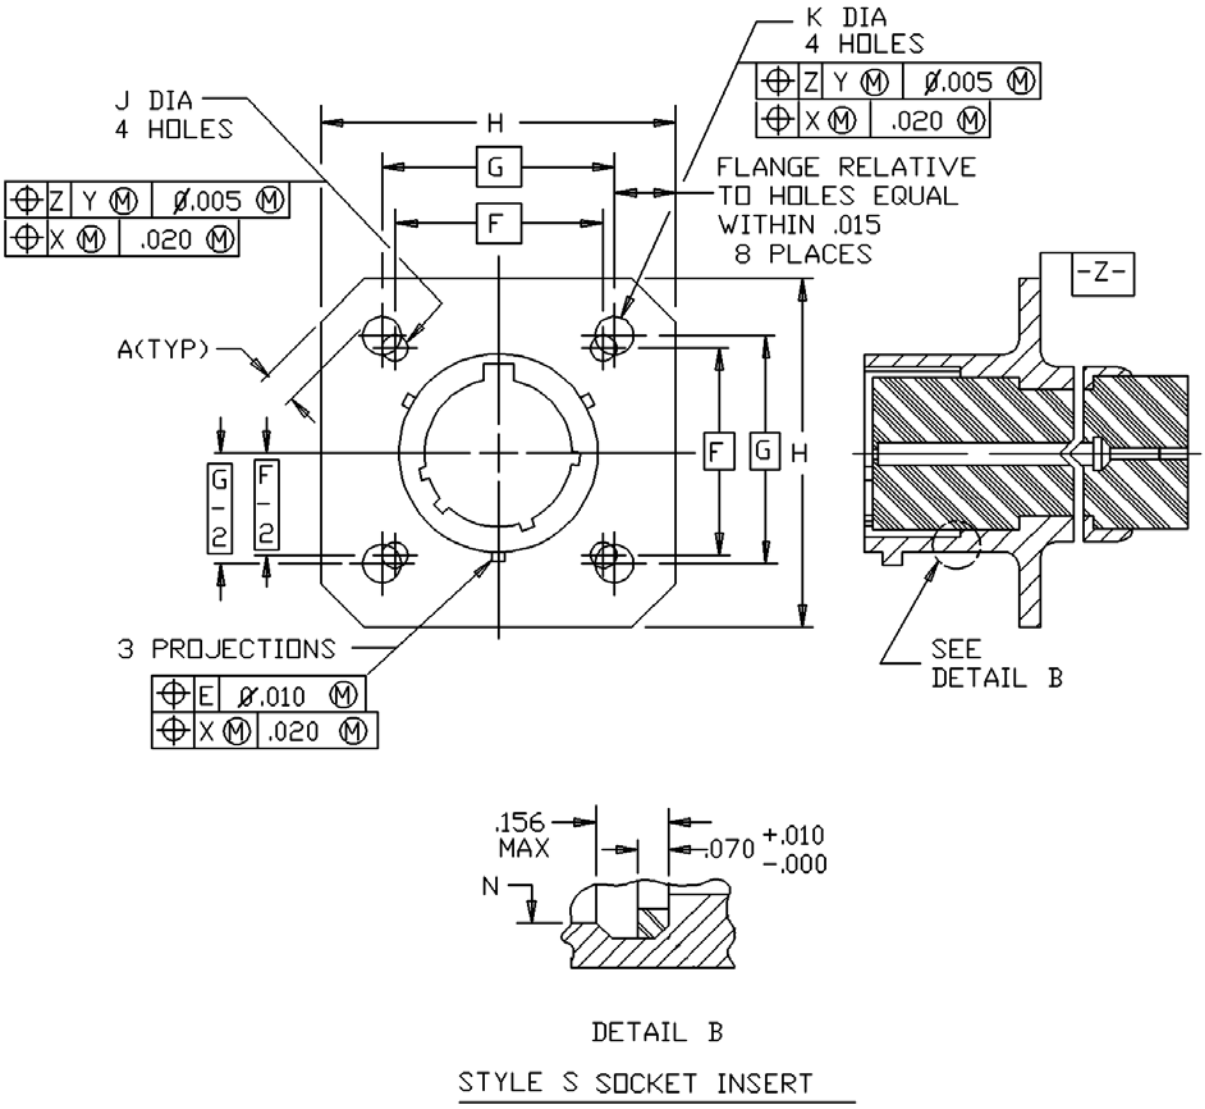


FIGURE 1. Receptacle, dimensions, class E - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:59Z
Check the source to verify that this is the current version before use.

Shell size	A min edge distance	B ± .016 thick mounting flange	C max overall length	D + .031 - .000 mounting flange location	E dia. + .031 - .024 OD	F (TP) mounting holes	G (TP) mounting holes
10	.035	.062	1.320	.462	.562	.719	.812
12					.688	.812	.938
14					.812	.906	1.031
16					.938	.969	1.125
18					1.062	1.062	1.203
20	.050	.094	1.367	.556	1.188	1.156	1.297
22					1.312	1.250	1.375
24			1.418	.589	1.438	1.375	1.500

FIGURE 1. Receptacle, dimensions, class E - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:59Z
Check the source to verify that this is the current version before use.

Shell size	H max length	J ±.005 dia mounting holes	K ±.005 dia mounting holes	L +.010 -.020 pin contact location	M max	N max ID gasket	P UNEF-2A thread (optional)
10	1.141	.120	.150	.085	.406	.457	.5625-24
12	1.266					.564	.6875-24
14	1.360					.689	.8125-20
16	1.453					.814	.9375-20
18	1.532					.907	1.0625-18
20	1.688			.147		1.039	1.1875-18
22	1.766					1.164	1.3125-18
24	1.891	.147				1.289	1.4375-18

FIGURE 1. Receptacle, dimensions, class E - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:59Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.001	0.03	.126	3.20	.907	23.04	1.320	33.53
.005	0.13	.147	3.73	.938	23.83	1.360	34.54
.007	0.18	.150	3.82	.969	24.61	1.367	34.72
.010	0.28	.156	3.96	1.031	26.19	1.375	34.93
.015	0.39	.406	10.31	1.039	26.39	1.418	36.02
.016	0.41	.457	11.61	1.062	26.97	1.438	36.53
.020	0.51	.462	11.73	1.125	28.58	1.453	36.91
.024	0.61	.556	14.12	1.141	28.98	1.500	38.10
.031	0.79	.562	14.27	1.156	29.36	1.532	38.91
.035	0.89	.564	14.33	1.164	29.57	1.688	42.88
.050	1.28	.589	14.96	1.188	30.18	1.766	44.86
.062	1.57	.688	17.48	1.203	30.56	1.891	48.03
.063	1.60	.689	17.50	1.250	31.75		
.070	1.78	.719	18.26	1.266	32.16		
.085	2.16	.812	20.62	1.289	32.74		
.094	2.39	.814	20.68	1.297	32.94		
.120	3.05	.906	23.01	1.312	33.32		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerance for all angles is ± 1/2°.
4. True position (TP) tolerance shall be in accordance with ASME Y14.5.
5. Intermatebility dimensions shall be in accordance with MIL-DTL-26482.

FIGURE 1. Receptacle, dimensions, class E - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:59Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figure 1.

This connector mates with MS3121 and MS3126.

Insert arrangements shall be in accordance with MIL-STD-1669.

Connector accessories: See SAE-AS85049.


Packing material shall be in accordance with ASTM-D2000.

Finishes: A finish designator shall not be included in the PIN when finish W is required. See MIL-DTL-26482 for alternative finishes D, T and Z for class E.

Material:

a. Shell - aluminum alloy.
b. Bayonet pins (B dia) - stainless steel, passivated.

Part or Identifying Number (PIN) example:

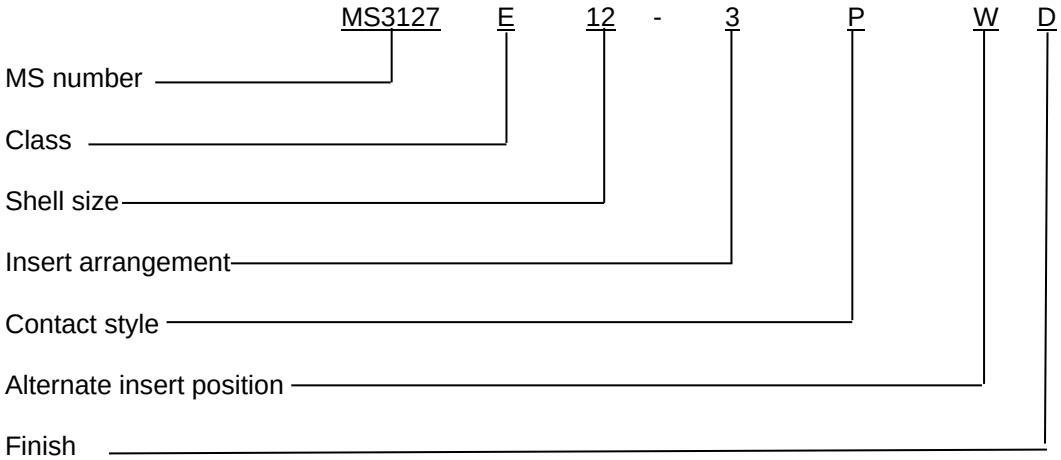

Note: When finish W is required, no finish designator is used (finish W is the default finish). In the PIN, a dash symbol ("-") shall be placed between the shell size and insert arrangement for classes E, F and P.

Amendment Notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:59Z
Check the source to verify that this is the current version before use.

Referenced documents. In addition to MIL-DTL-26482, this document references the following:

MS3121
MS3126
MIL-STD-1669
ASME Y14.5
ASTM-D2000
SAE-AS85049

CONCLUDING MATERIAL

Custodians:
Army -CR
Navy - AS
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-2017-118)

Review activities:
Army - AV, MI
Navy - EC, SH
Air Force - 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organization and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:59Z
Check the source to verify that this is the current version before use.