REVIEWER SYMBOLS:

ARMY - MI
NAVY - EC, OS
DLA - ES

USER SYMBOLS:

ARMY - ME
NAVY - OS
USAF

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

FED. SUP CLASS
5935

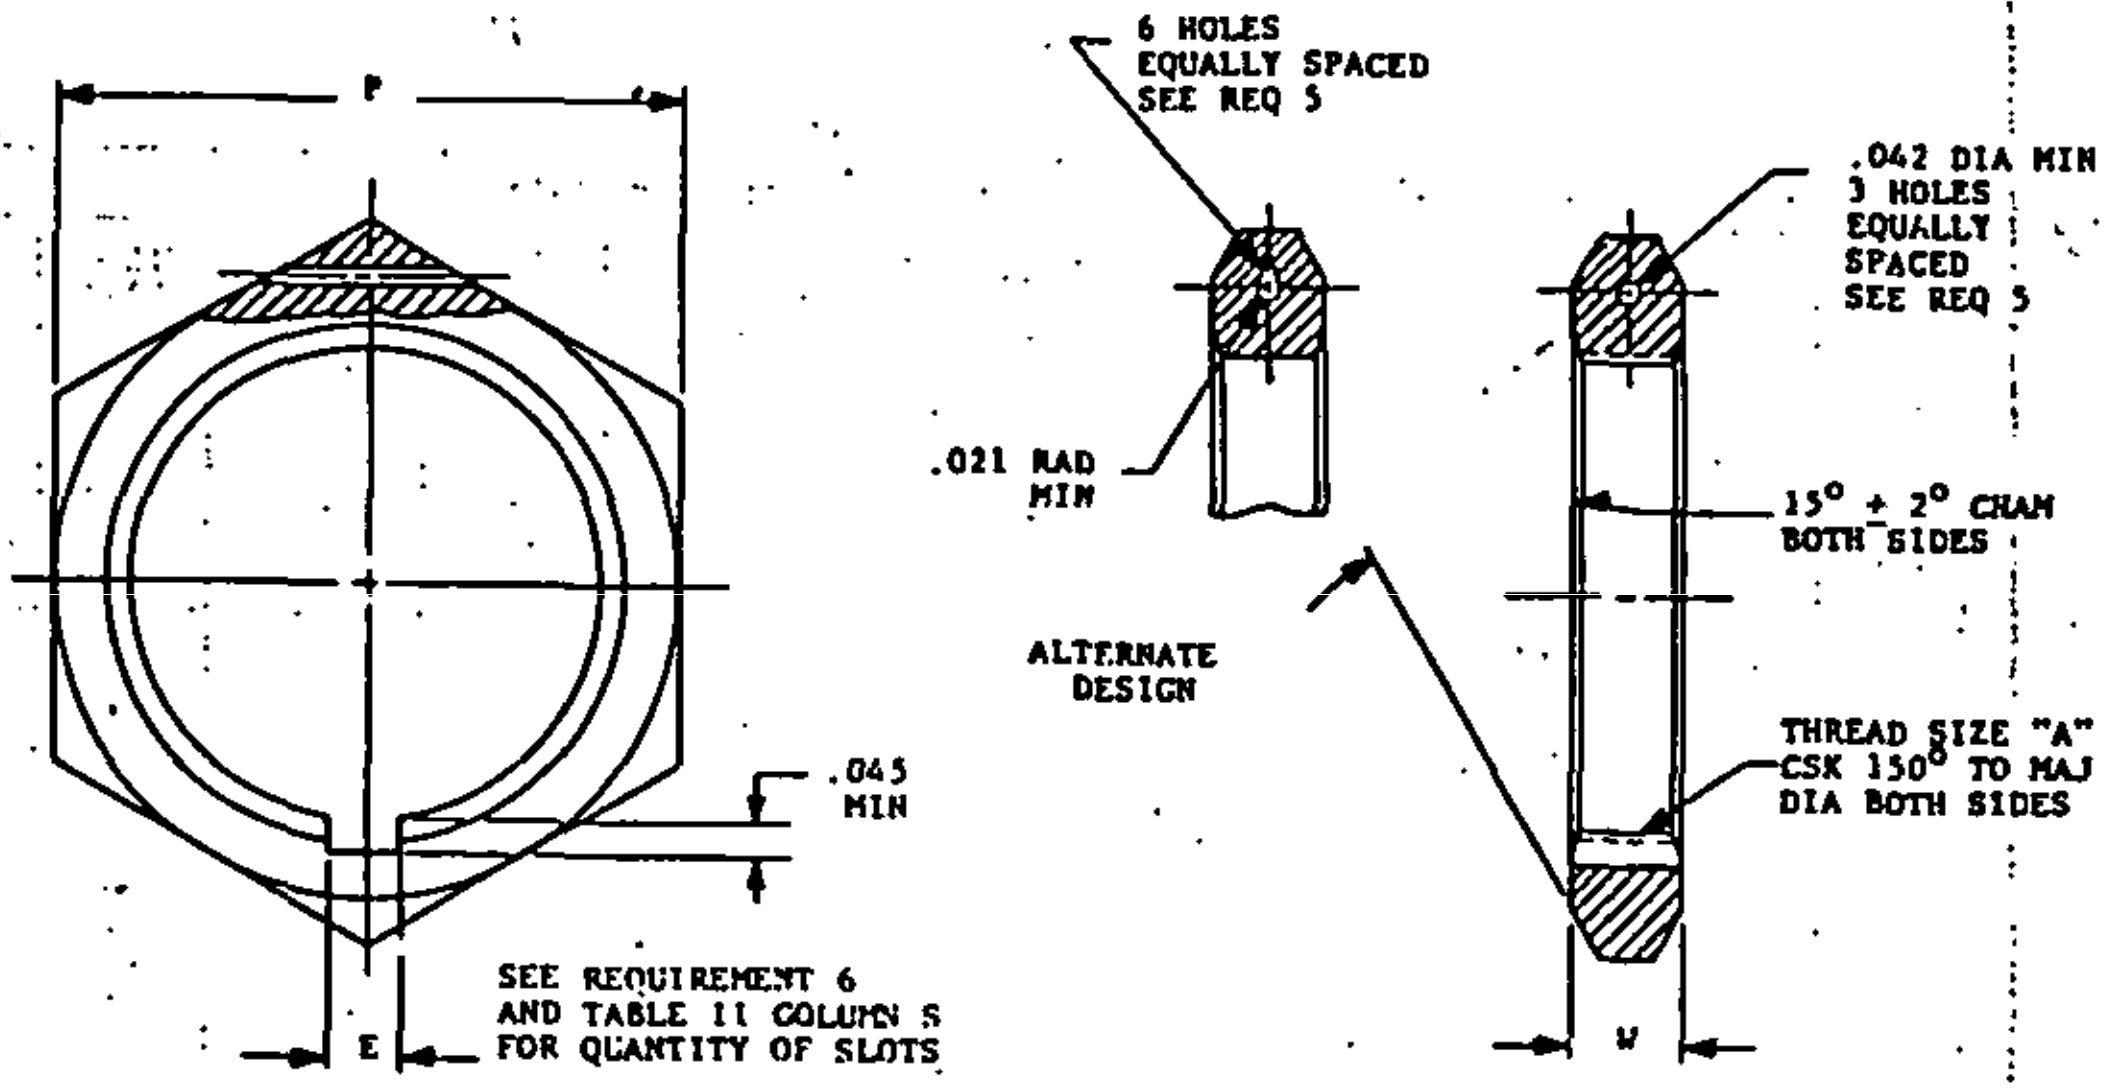

REQUIREMENTS:

1. The material and finish shall meet the requirements of the connector for which the mounting nut is being used.
2. Material:

   A - Heat treatable wrought aluminum (for use on aluminum shell connectors).

   S - Steel, cold rolled, commercial quality (for use on steel shell connectors). 1/

   C - CRES per QQ-S-764 (for use on CRES shell connectors).
3. Finish:

   A - Anodic coating, color black, in accordance with MIL-A-8625.

   B - Cadmium over corrosion resistant steel, color black, in accordance with QQ-P-416.

   N - Electroless nickel in accordance with MIL-C-26074. (Space Use Only)

   P - Passivated.

   W - Cadmium over nickel, color olive drab, in accordance with QQ-P-416.
4. Threads shall be in accordance with MIL-S-7742.
5. Remove all burrs and sharp edges.
6. Safety wire holes shall be capable of withstanding a 30-pound pull in any direction when using the .020 minimum diameter wire specified in MS33540. Two pulls should be made, one parallel with axis of the nut and one perpendicular to axis at nut.
7. Slots shall be 120° apart, orientation optional with respect to hexagon configuration. Slot dimension shall provide sufficient clearance for mounting on applicable jam-nut connector.

Ⓓ Example of Part No.:

```
MS3186   A   113   B
  |      |    |    |___ Finish (See Req. 3)
  |      |    |________ Dash Number
  |      |_____________ Material
  |____________________ Military Standard
```

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER ACQUISITION DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON THE DATE OF INVITATION FOR BID.

Ⓓ COMPLETELY REVISED 1/ Bright cadmium (QQ-P-416) plated aluminum nut may be used in lieu of steel nuts.

APPROVED 20 SEPT 66 REVISED Ⓐ 19 AUG 70 Ⓑ 13 AUG 73 Ⓒ 13 JAN 78 Ⓓ 6 APR 84

P.A. NAVY - AS Other Cust ARMY - CR USAF - 85	TITLE CONNECTOR MOUNTING TO CONNECTORS, MOUNTING NUTS, PLAIN HEXAGON	MILITARY STANDARD MS 3186
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 1 OF 5

DD FORM 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. PROJECT NO. 5935-3356 PLATE NO. 17709

FED. SUP CLASS
5935

USER SYMBOLS:
ARMY - IE
NAVY - OS
USAF

REVIEWER SYMBOLS:
ARMY - MI
NAVY - EC, OS
DLA - ES

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

TABLE I

DASH NO.	MATERIAL (SEE REQ 1)	FOR CONNECTOR SHELL SIZE (REF) MIL-C-5015	MIL-C-26482	MIL-C-26500	MIL-C-83723 I	MIL-C-83723 III	MIL-C-38999 I	MIL-C-38999 II	MIL-C-28840	MIL-C-27599
101	A	8S	--	--	--	--	--	--	--	--
	S	8S	--	--	--	--	--	--	--	--
	C	8S	--	--	--	--	--	--	--	--
102	A	--	8	--	8	--	--	--	--	--
	S	--	8	--	8	--	--	--	--	--
	C	--	8	--	8	--	--	--	--	--
103	A	10S, 10SL	--	--	--	--	--	--	--	--
	S	10S, 10SL	--	--	--	--	--	--	--	--
	C	10S, 10SL	--	--	--	--	--	--	--	--
104	A	--	--	8	--	--	--	--	--	--
	S	--	--	8	--	--	--	--	--	--
	C	--	--	8	--	--	--	--	--	--
105	A	--	--	--	--	8	--	--	--	--
	S	--	--	--	--	8	--	--	--	--
	C	--	--	--	--	8	--	--	--	--
106	A	--	10	--	10	--	9	--	--	9
	S	--	10	--	10	--	9	--	--	9
	C	--	10	--	10	--	9	--	--	9
107	A	12S, 12	--	10	--	10	--	--	--	--
	S	12S, 12	--	10	--	10	--	--	--	--
	C	12S, 12	--	10	--	10	--	--	--	--
108	A	--	--	--	--	--	11	--	--	11
	S	--	--	--	--	--	11	--	--	11
	C	--	--	--	--	--	11	--	--	11
109	A	14S, 14	12	--	12	--	--	8	11	8
	S	14S, 14	12	--	12	--	--	8	11	8
	C	14S, 14	12	--	12	--	--	8	11	8
110	A	--	--	12	--	12	--	--	--	--
	S	--	--	12	--	12	--	--	--	--
	C	--	--	12	--	12	--	--	--	--
111	A	16S, 16	14	14	14	14	13	10	13	10 13
	S	16S, 16	14	14	14	14	13	10	13	10 13
	C	16S, 16	14	14	14	14	13	10	13	10 13
112	A	--	--	16	--	16 1/	--	--	--	--
	S	--	--	16	--	16 1/	--	--	--	--
	C	--	--	16	--	16 1/	--	--	--	--
113	A	18	16	--	16	16 2/	15	12	--	12 15
	S	18	16	--	16	16 2/	15	12	--	12 15
	C	18	16	--	16	16 2/	15	12	--	12 15
114	A	--	--	--	--	--	--	--	15	--
	S	--	--	--	--	--	--	--	15	--
	C	--	--	--	--	--	--	--	15	--
115	A	--	--	18	--	--	--	--	--	14 17
	S	--	--	18	--	--	--	--	--	14 17
	C	--	--	18	--	--	--	--	--	14 17

NOTES: 1. Dimensions in inches.
2. Finish: See Req 2.

1/ For Bayonet Coupling Only
2/ For Threaded Coupling Only

APPROVED 20 SEPT 66 REVISED (D) FOR CHANGES SEE SHEETS 1 THRU 5

P.A. NAVY-AS Other Cust ARMY - CR USAF - 85	TITLE CONNECTOR MOUNTING TO CONNECTORS, MOUNTING NUTS, PLAIN HEXAGON	MILITARY STANDARD MS 3186
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 2 OF 5

DD FORM 1 SEP 71 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PLATE NO. 17709

FED. SUP CLASS
5935

TABLE I (continued)

DASH NO.	MATERIAL (SEE REQ 1)	FOR CONNECTOR SHELL SIZE (REF)								
		MIL-C-5015	MIL-C-26482	MIL-C-26500	MIL-C-83723 I	MIL-C-83723 III	MIL-C-38999 I	MIL-C-38999 II	MIL-C-28840	MIL-C-27599
116	A S C	20 20 20	18 18 18	-- -- --	18 18 18	18 18 18	17 17 17	14 14 14	17 17 17	-- -- --
117	A S C	22 22 22	20 20 20	20 20 20	20 20 20	20 20 20	19 19 19	16 16 16	-- -- --	16 19 16 19 16 19
118	A S C	-- -- --	-- -- --	-- -- --	-- -- --	-- -- --	-- -- --	-- -- --	19 19 19	-- -- --
119	A S C	-- -- --	-- -- --	22 22 22	-- -- --	-- -- --	-- -- --	-- -- --	-- -- --	-- -- --
120	A S C	24 24 24	22 22 22	-- -- --	22 22 22	22 22 22	21 21 21	18 18 18	-- -- --	18 21 18 21 18 21
121	A S C	-- -- --	24 24 24	24 24 24	24 24 24	24 24 24	23 23 23	20 20 20	23 23 23	20 23 20 23 20 23
122	A S C	28 28 28	-- -- --	-- -- --	-- -- --	-- -- --	25 25 25	22 22 22	25 25 25	22 25 22 25 22 25
123	A S C	-- -- --	-- -- --	-- -- --	-- -- --	-- -- --	-- -- --	24 24 24	-- -- --	24 24 24
124	A S C	-- -- --	-- -- --	-- -- --	-- -- --	-- -- --	-- -- --	-- -- --	29 29 29	-- -- --
125	A S C	32 32 32	-- -- --	-- -- --	-- -- --	-- -- --	-- -- --	-- -- --	-- -- --	-- -- --
126	A S C	-- -- --	-- -- --	-- -- --	-- -- --	-- -- --	-- -- --	-- -- --	33 33 33	-- -- --
127	A S C	36 36 36	-- -- --	-- -- --	-- -- --	-- -- --	-- -- --	-- -- --	-- -- --	-- -- --
128	A S C	40 40 40	-- -- --	-- -- --	-- -- --	-- -- --	-- -- --	-- -- --	-- -- --	-- -- --
129	A S C	44 44 44	-- -- --	-- -- --	-- -- --	-- -- --	-- -- --	-- -- --	-- -- --	-- -- --
130	A S C	48 48 48	-- -- --	-- -- --	-- -- --	-- -- --	-- -- --	-- -- --	-- -- --	-- -- --

NOTES: 1. Dimensions in inches.
2. Finish: See Req 2.

CUSTODIANS
ARMY - MI
NAVY - EC, OS
DLA - ES

USER ACTIVITIES
ARMY - ME
NAVY - OS
USAF

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

"Standard part information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

APPROVED 28 SEPT 66 Ⓓ FOR CHANGES SEE SHEETS 1 THRU 5

P.A.
NAVY — AS
Other Cust
ARMY - CR
USAF - 85

TITLE
CONNECTOR MOUNTING TO CONNECTORS, MOUNTING NUTS, PLAIN HEXAGON

MILITARY STANDARD
MS 3186

PROCUREMENT SPECIFICATION
NONE

SUPERSEDED:

SHEET 3 OF 5

FED. SUP CLASS
5935

ARMY - ME
NAVY - OS
USAF -

ARMY - MI
NAVY - EC, OS
DLA - ES

APPROVED 28 SEPT 66 REVISED Ⓓ FOR CHANGES SEE SHEETS 1 THRU 5

TABLE II

DASH NO.	MATERIAL (SEE REQ 1)	A THREAD SIZE	E MAX	P ±.017	S MIN. NO. OF SLOTS	W ±.017	SUPERSEDES DASH NO.
101	A S C	.500-28UNEF-2B	NONE	.687	NONE	.125	-25 -26 -27
102	A S C	.5625-24UNEF-2B	.135	.750	2	.125	-28 -29 -30
103	A S C	.625-24UNEF-2B	NONE	.812	NONE	.125	-31 -32 -33
104	A S C	.625-20UN-2B	NONE	.812	NONE	.125	--- --- ---
105	A S C	.625-20UN-2B	NONE	.812	NONE	.125	--- --- ---
106	A S C	.6875-24UNEF-2B	.135	.875	1	.125	-34 -35 -36
107	A S C	.750-20UNEF-2B	NONE	.937	NONE	.125	-37 -38 -39
108	A S C	.8125-20UNEF-2B	.135	1.000	1	.125	--- --- ---
109	A S C	.875-20UNEF-2B	.135	1.062	1	.125	-40 -41 -42
110	A S C	.9375-20UNEF-2B	NONE	1.123	NONE	.125	--- --- ---
111	A S C	1.000-20UNEF-2B	.135	1.188	1	.125	-43 -44 -45
112	A S C	1.125-20UN-2B	NONE	1.312	NONE	.125	--- --- ---
113	A S C	1.125-18UNEF-2B	.135	1.312	1	.125	-46 -47 -48
114	A S C	1.1875-18UNEF-2B	NONE	1.375	NONE	.125	--- --- ---
115	A S C	1.250-20UN-2B	NONE	1.438	NONE	.125	--- --- ---

NOTES:
1. Dimensions in inches.
2. Finish: See Req 2.

P.A. NAVY – AS Other Cust ARMY – CR USAF – 85	TITLE CONNECTOR MOUNTING TO CONNECTORS, MOUNTING NUTS, PLAIN HEXAGON	MILITARY STANDARD MS 3186
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 4 OF 5

FED. SUP CLASS
5935

[illegible]
ARMY - MI
NAVY - EC, OS
DLA - ES

[illegible]
ARMY - ME
NAVY - OS
USAF - -

TABLE II (continued)

DASH NO.	MATERIAL (SEE REQ 1)	A THREAD SIZE	E MAX	P ±.017	S MIN. NO. OF SLOTS	W ±.017	SUPERSEDES DASH NO.
116	A S C	1.250-18UNEF-2B	.135	1.438	1	.125	-49 -50 -51
117	A S C	1.375-18UNEF-2B	.192	1.562	1	.125	-52 -53 -54
118	A S C	1.4375-18UNEF-2B	NONE	1.625	NONE	.125	--- --- ---
119	A S C	1.500-20UN-2B	NONE	1.688	NONE	.125	--- --- ---
120	A S C	1.500-18UNEF-2B	.192	1.688	1	.125	-55 -56 -57
121	A S C	1.625-18UNEF-2B	.192	1.812	1	.125	-58 -59 -60
122	A S C	1.750-18UNS-2B	.192	2.000	1	.125	-61 -62 -63
123	A S C	1.875-16UN-2B	NONE	2.125	NONE	.125	--- --- ---
124	A S C	1.9375-16UN-2B	NONE	2.187	NONE	.189	--- --- ---
125	A S C	2.000-18UNS-2B	NONE	2.250	NONE	.189	-64 -65 -66
126	A S C	2.125-16UN-2B	NONE	2.375	NONE	.189	--- --- ---
127	A S C	2.250-16UN-2B	NONE	2.500	NONE	.189	-67 -68 -69
128	A S C	2.500-16UN-2B	NONE	2.750	NONE	.189	-70 -71 -72
129	A S C	2.750-16UN-2B	NONE	3.000	NONE	.189	-73 -74 -75
130	A S C	3.000-16UN-2B	NONE	3.250	NONE	.189	-76 -77 -78

NOTES:
1. Dimensions in inches.
2. Finish: See Req 2.

APPROVED 28 SEPT 66 REVISED (D) FOR CHANGES SEE SHEETS 1 THRU 5

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

"Custodian/Army information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

P.A. NAVY — AS Other Cust ARMY - CR USAF - 85	TITLE CONNECTOR MOUNTING TO CONNECTORS, MOUNTING NUTS, PLAIN HEXAGON	MILITARY STANDARD MS 3186
PROCUREMENT SPECIFICATION NONE	SUPERSEDES: -	SHEET 5 OF 5

DD FORM 1 MAR 70 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PLATE NO. [illegible]