REVIEW: ME, EA, IN, AV, MA, AT
USER: SH, OL, MU, YD, PA, WV, MC

FED. SUP. CLASS 5305

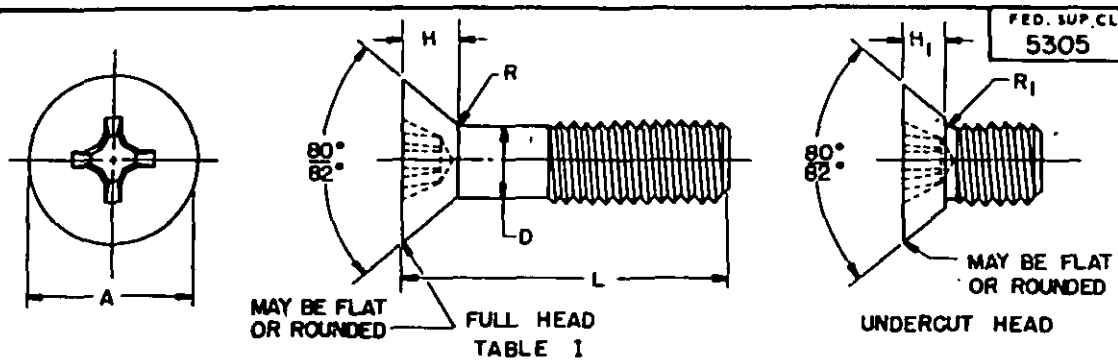


TABLE I

NOMINAL SIZE		(#0) .060	(#2) .086	(#4) .112	(#6) .138	(#8) .164	(#10) .190	(1/4) .250	(5/16) .3125	(3/8) .375
THREADS PER INCH, UNF-2A		80	64	48	40	36	32	28	24	24
D BODY DIAMETER	MAX	.0600	.0860	.1120	.1380	.1640	.1900	.2500	.3125	.3750
	MIN	.0496	.0733	.0954	.1184	.1424	.1658	.2225	.2806	.3430
A HEAD DIAMETER	MAX SHARP	.119	.172	.225	.279	.332	.385	.507	.635	.762
	MIN SHARP	.105	.156	.207	.257	.308	.359	.477	.600	.722
	ABS MIN	.099	.147	.195	.244	.292	.340	.452	.568	.685
H HEAD HEIGHT	REF	.035	.051	.067	.083	.100	.116	.153	.191	.230
H_1 HEAD HEIGHT UNDERCUT	MAX	.025	.036	.047	.059	.070	.081	.107	.134	.161
	MIN	.018	.028	.038	.048	.058	.068	.092	.116	.140
R RADIUS	MAX	.024	.034	.045	.055	.066	.076	.100	.125	.150
R_1 RADIUS-UNDERCUT	MAX	.009	.013	.017	.021	.025	.029	.038	.047	.056
DRIVER SIZE		0	1	1	2	2	2	3	4	4
TENSILE STRENGTH (LBS) MIN		110	240	410	630	910	1240	2250	3600	5440

L LENGTH	TOLERANCE	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.
.125	+0 -.031	109	1	10	21	36				
.188		110	2	11	22	37				
.250		111	3	12	23	38	51			
.312		112	4	13	24	39	52	66		
.375		113	5	14	25	40	53	67	80	
.438			6	15	26	41	54	68	81	
.500			7	16	27	42	55	69	82	93
.625			8	17	28	43	56	70	83	94
.750			9	18	29	44	57	71	84	95
.875				19	30	45	58	72	85	96
1.000				20	31	46	59	73	86	97
1.250	+0 -.062				32	47	60	74	87	98
1.500					33	48	61	75	88	99
1.750					34	49	62	76	89	100
2.000					35	50	63	77	90	101
2.250	+0 -.094						64	78	91	102
2.500							65	79	92	103
2.750										104
3.000										105

NOTES:
1. MATERIAL: Aluminum Alloy (2024-T4), in accordance with QQ-A-225/6 having minimum ultimate tensile strength of 62,000 PSI.
2. PROTECTIVE COATING: Anodic Coating in accordance with MIL-A-8625, type 1 or 2, class 1.
3. THREADS: The threads shall be in accordance with Screw-Thread Standards for Federal Services, Handbook H-28.
4. THREAD LENGTH: Screws 2.00 inches long and shorter shall have complete threads extending to within two threads of the head, or closer if applicable. Longer screws shall have a minimum thread length of 1.50 inches.
5. RECESS: The recess shall be in accordance with MS9006.
6. DIMENSIONS: All dimensions are in inches unless otherwise specified.
7. UNDERCUT HEADS: Screws above dotted lines shall have undercut heads.
8. PART NUMBER: The MS part number consists of the MS number, plus the dash numbers. Example: MS35203-1.
9. Referenced documents shall be of the issue in effect on date of invitations for bid.
10. For design feature purposes, this standard takes precedence over procurement documents referenced herein.

(B) ENTIRE STANDARD REVISED

APPROVED 25 JUN 1953 REVISED (A) 25 MAR 1963 (B) 14 JUN 1976

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, and deviations.

P.A. WC	TITLE	MILITARY STANDARD
Other Cust 82	SCREW, MACHINE-FLAT COUNTERSUNK HEAD, 82°, CROSS-RECESSED, ALUMINUM ALLOY, ANODIC COATED, UNF-2A	MS35203
PROCUREMENT SPECIFICATION FF-S-92	SUPERSEDES: MS35262, MS35358 in part, MS35363 in part and AN510 in part.	SHEET 1 OF 4

DD FORM 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5305-1214

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:11Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5305

TABLE II

The screws covered by the dash numbers given in MS35262 and AN510 in part are cancelled/inactivated after dates indicated on the documents. The cancelled screws cannot always replace the superseding screws and should be used until existing stocks are depleted. Use only the superseding screws for design and replacement. Replacement shall be in accordance with this table.

CROSS REFERENCE OF PART NUMBERS

CANCELLED			SUPERSEDED BY	CANCELLED			SUPERSEDED BY
MS35262	AN510		MS35203	MS35262	AN510		MS35203
Dash Number			Dash Number	Dash Number			Dash Number
1	DD0R2	DD0-2	109		DD5R4	DD5-4	No Replacement
2	DD0R3	DD0-3	110		DD5R5	DD5-5	No Replacement
3	DD0R4	DD0-4	111		DD5R6	DD5-6	No Replacement
4	DD0R5	DD0-5	112		DD5R7	DD5-7	No Replacement
5	DD0R6	DD0-6	113		DD5R8	DD5-8	No Replacement
	DD0R7	DD0-7	No Replacement		DD5R9	DD5-9	No Replacement
	DD0R8	DD0-8	No Replacement		DD5R10	DD5-10	No Replacement
6	DD1R2	DD1-2	No Replacement		DD5R11	DD5-11	No Replacement
7	DD1R3	DD1-3	No Replacement		DD5R12	DD5-12	No Replacement
8	DD1R4	DD1-4	No Replacement		DD5R13	DD5-13	No Replacement
9	DD1R5	DD1-5	No Replacement		DD5R14	DD5-14	No Replacement
10	DD1R6	DD1-6	No Replacement		DD5R15	DD5-15	No Replacement
11	DD1R7	DD1-7	No Replacement		DD5R16	DD5-16	No Replacement
12	DD1R8	DD1-8	No Replacement		DD5R18	DD5-18	No Replacement
13			1		DD5R20	DD5-20	No Replacement
14	DD2R2	DD2-3	2		DD5R22	DD5-22	No Replacement
15	DD2R4	DD2-4	3		DD5R24	DD5-24	No Replacement
16	DD2R5	DD2-5	4		DD5R26	DD5-26	No Replacement
17	DD2R6	DD2-6	5		DD5R28	DD5-28	No Replacement
18	DD2R7	DD2-7	6	33			21
19	DD2R8	DD2-8	7	34			22
	DD2R9	DD2-9	No Replacement	35	DD6R4	DD6-4	23
20	DD2R10	DD2-10	8	36	DD6R5	DD6-5	24
	DD2R11	DD2-11	No Replacement	37	DD6R6	DD6-6	25
21	DD2R12	DD2-12	9	38	DD6R7	DD6-7	26
	DD3R3	DD3-3	No Replacement	39	DD6R8	DD6-8	27
	DD3R4	DD3-4	No Replacement		DD6R9	DD6-9	No Replacement
	DD3R5	DD3-5	No Replacement	40	DD6R10	DD6-10	28
	DD3R6	DD3-6	No Replacement		DD6R11	DD6-11	No Replacement
	DD3R7	DD3-7	No Replacement	41	DD6R12	DD6-12	29
	DD3R8	DD3-8	No Replacement		DD6R13	DD6-13	No Replacement
	DD3R9	DD3-9	No Replacement	42	DD6R14	DD6-14	30
	DD3R10	DD3-10	No Replacement		DD6R15	DD6-15	No Replacement
	DD3R11	DD3 11	No Replacement	43	DD6R16	DD6-16	31
	DD3R12	DD3-12	No Replacement		DD6R18	DD6-18	No Replacement
22			10	44	DD6R20	DD6-20	32
23	DD4R2	DD4-3	11		DD6R22	DD6-22	No Replacement
24	DD4R4	DD4-4	12	45	DD6R24	DD6-24	33
25	DD4R5	DD4-5	13		DD6R26	DD6-26	No Replacement
26	DD4R6	DD4-6	14	46	DD6R28	DD6-28	34
27	DD4R7	DD4-7	15		DD6R30	DD6-30	No Replacement
28	DD4R8	DD4-8	16	47	DD6R32	DD6-32	35
	DD4R9	DD4-9	No Replacement		DD6R34	DD6-34	No Replacement
29	DD4R10	DD4-10	17		DD6R36	DD6-36	No Replacement
	DD4R11	DD4-11	No Replacement		DD6R38	DD6-38	No Replacement
30	DD4R12	DD4-12	18		DD6R40	DD6-40	No Replacement
	DD4R13	DD4-13	No Replacement	48			36
31	DD4R14	DD4-14	19	49			37
	DD4R15	DD4-15	No Replacement	50	DD8R4	DD8-4	38
32	DD4R16	DD4-16	20	51	DD8R5	DD8-5	39
	DD4R18	DD4-18	No Replacement	52	DD8R6	DD8-6	40
	DD4R20	DD4-20	No Replacement	53	DD8R7	DD8-7	41
	DD4R22	DD4-22	No Replacement	54	DD8R8	DD8-8	42
	DD4R24	DD4-24	No Replacement		DD8R9	DD8-9	No Replacement
	DD4R26	DD4-26	No Replacement	55	DD8R10	DD8-10	43
	DD4R28	DD4-28	No Replacement		DD8R11	DD8-11	No Replacement

(Continued on Sheet 3)

APPROVED 25 JUNE 53 REVISED (A) 25 MAR 1963 (B) FOR CHANGES SEE SHEET 1.

REVIEW: ME, EA, IS, AV, MI, AT
USER: SH, GL, MU, YD, PA, WV, MC

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

P.A. VC
Other Cust 82

TITLE
SCREW, MACHINE-FLAT COUNTERSUNK HEAD, 82°, CROSS-RECESSED, ALUMINUM ALLOY, ANODIC COATED, UNF-2A

MILITARY STANDARD
MS35203

PROCUREMENT SPECIFICATION FP-S-92

SUPERSEDES: MS35262, MS35358 in part, MS35363 in part and AN510 in part

SHEET 2 OF 4

DD FORM 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:11Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5305

REVIEW: ME, EA, IS, AV, MI, AT
USER: SH, CL, MU, YD, PM, WV, MC

CROSS REFERENCE OF PART NUMBERS

CANCELLED			SUPERSEDED BY	CANCELLED			SUPERSEDED BY
MS35262	AN510		MS35203	MS35262	AN510		MS35203
Dash Number			Dash Number	Dash Number			Dash Number
56	DD8R12	DD8-12	44		DD416R9	DD416-9	No Replacement
	DD8R13	DD8-13	No Replacement	90	DD416R10	DD416-10	70
57	DD8R14	DD8-14	45		DD416R11	DD416-11	No Replacement
	DD8R15	DD8-15	No Replacement	91	DD416R12	DD416-12	71
58	DD8R16	DD8-16	46		DD416R13	DD416-13	No Replacement
	DD8R18	DD8-18	No Replacement	92	DD416R14	DD416-14	72
59	DD8R20	DD8-20	47		DD416R15	DD416-15	No Replacement
	DD8R22	DD8-22	No Replacement	93	DD416R16	DD416-16	73
60	DD8R24	DD8-24	48		DD416R18	DD416-18	No Replacement
	DD8R26	DD8-26	No Replacement	94	DD416R20	DD416-20	74
61	DD8R28	DD8-28	49		DD416R22	DD416-22	No Replacement
	DD8R30	DD8-30	No Replacement	95	DD416R24	DD416-24	75
62	DD8R32	DD8-32	50		DD416R26	DD416-26	No Replacement
	DD8R34	DD8-34	No Replacement	96	DD416R28	DD416-28	76
63	DD8R36	DD8-36	No Replacement		DD416R30	DD416-30	No Replacement
	DD8R38	DD8-38	No Replacement	97	DD416R32	DD416-32	77
64	DD8R40	DD8-40	No Replacement		DD416R34	DD416-34	No Replacement
	DD8R42	DD8-42	No Replacement	98	DD416R36	DD416-36	78
65	DD8R44	DD8-44	No Replacement		DD416R38	DD416-38	No Replacement
	DD8R46	DD8-46	No Replacement	99	DD416R40	DD416-40	79
66	DD8R48	DD8-48	No Replacement		DD416R42	DD416-42	No Replacement
67			No Replacement	100	DD416R44	DD416-44	No Replacement
68	DD10R4	DD10-4	51		DD416R46	DD416-46	No Replacement
69	DD10R5	DD10-5	52	101	DD416R48	DD416-48	No Replacement
70	DD10R6	DD10-6	53	102			80
71	DD10R7	DD10-7	54	103			81
72	DD10R8	DD10-8	55	104			82
	DD10R9	DD10-9	No Replacement	105			83
73	DD10R10	DD10-10	56	106			84
	DD10R11	DD10-11	No Replacement	107			85
74	DD10R12	DD10-12	57	108			86
	DD10R13	DD10-13	No Replacement	109			87
75	DD10R14	DD10-14	58	110			88
	DD10R15	DD10-15	No Replacement	111			89
76	DD10R16	DD10-16	59	112			90
	DD10R18	DD10-18	No Replacement	113			91
77	DD10R20	DD10-20	60	114			92
	DD10R22	DD10-22	No Replacement	115			No Replacement
78	DD10R24	DD10-24	61	116			No Replacement
	DD10R26	DD10-26	No Replacement	117			93
79	DD10R28	DD10-28	62	118			94
	DD10R30	DD10-30	No Replacement	119			95
80	DD10R32	DD10-32	63	120			96
	DD10R34	DD10-34	No Replacement	121			97
81	DD10R36	DD10-36	64	122			98
	DD10R38	DD10-38	No Replacement	123			99
82	DD10R40	DD10-40	65	124			100
	DD10R42	DD10-42	No Replacement	125			101
83	DD10R44	DD10-44	No Replacement	126			102
	DD10R46	DD10-46	No Replacement	127			103
84	DD10R48	DD10-48	No Replacement	128			104
85			No Replacement	129			105
86			66	130 thru			
87	DD416R6	DD416-6	67	181			No Replacement
88	DD416R7	DD416-7	68				
89	DD416R8	DD416-8	69				

APPROVED 25 JUNE 63 REVISED (A) 25 MAR 1963 (B) FOR CHANGES SEE SHEET 1.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when available.


P.A. WC Other Cust 82	TITLE SCREW, MACHINE-FLAT COUNTERSUNK HEAD, 82°, CROSS-RECESSED, ALUMINUM ALLOY, ANODIC COATED, UNF-2A	MILITARY STANDARD MS 35203	
PROCUREMENT SPECIFICATION PP-S-92	SUPERSEDES: MS35262, MS35358 in part, MS35363 in part and AN510 in part	SHEET 3 OF 4	


DD FORM 672-1 (Copy)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:11Z
Check the source to verify that this is the current version before use.


REVIEW: ME, EA, IS, AV, MI, AT
USER: SH, GL, MS, YD, PA, WY, MC

FED. SUP CLASS 5305



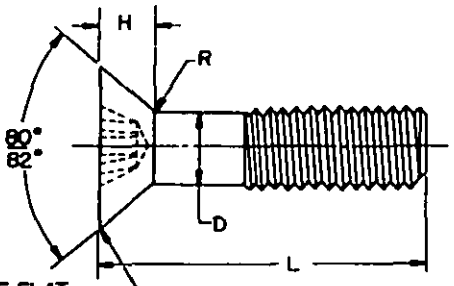

FULL HEAD



UNDERCUT HEAD

TABLE III
METRIC TRANSLATION OF TABLE I

NOMINAL SIZE		MM	1.524	2.184	2.845	3.505	4.166	4.826	6.350	7.938	9.525
PITCH			.32	.40	.53	.64	.71	.79	.91	1.06	1.06
D	BODY DIAMETER	MAX	1.524	2.184	2.845	3.505	4.166	4.826	6.350	7.938	9.525
		MIN	1.260	1.862	2.423	3.007	3.617	4.211	5.652	7.127	8.712
A	HEAD DIA	MAX SHARP	3.023	4.369	5.715	7.087	8.433	9.779	12.878	16.129	19.355
		MIN SHARP	2.667	3.962	5.258	6.528	7.823	9.119	12.116	15.240	18.339
		ABS MIN	2.515	3.734	4.923	6.198	7.417	8.636	11.481	14.427	17.399
H	HEAD HEIGHT	REF	.889	1.295	1.702	2.108	2.540	2.946	3.886	4.851	5.842
H_1	HEAD HEIGHT UNDER CUT	MAX	.635	.914	1.194	1.499	1.778	2.057	2.718	3.404	4.089
		MIN	.457	.711	.965	1.219	1.473	1.727	2.337	2.946	3.556
R	RADIUS	MAX	.610	.864	1.143	1.397	1.676	1.930	2.540	3.175	3.810
R_1	RADIUS UNDERCUT	MAX	.229	.330	.432	.533	.635	.737	.965	1.194	1.422
DRIVER SIZE			0	1	1	2	2	2	3	4	4
TENSILE STRENGTH, KN-MIN			.493	1.075	1.837	2.823	4.078	5.557	10.084	16.135	24.383

L LENGTH	TOLERANCE	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.
3.175		109	1	10	21	36				
4.775		110	2	11	22	37				
6.350		111	3	12	23	38	51			
7.925		112	4	13	24	39	52	66		
9.525		113	5	14	25	40	53	67	80	
11.125	+0		6	15	26	41	54	68	81	
12.700	-.787		7	16	27	42	55	69	82	93
15.875			8	17	28	43	56	70	83	94
19.050			9	18	29	44	57	71	84	95
22.225				19	30	45	58	72	85	96
25.400				20	31	46	59	73	86	97
31.750					32	47	60	74	87	98
38.100	+0				33	48	61	75	88	99
44.450	-1.575				34	49	62	76	89	100
50.800					35	50	63	77	90	101
57.150							64	78	91	102
63.500	+0						65	79	92	103
69.850	-2.388									104
76.200										105

NOTE: All dimensions are in millimetres (mm), unless otherwise specified, and are based on an approximate conversion factor of 25.4mm equals one inch.

APPROVED 25 JUN 1953 REVISED (A) 25 MAR 1963 (B) FOR CHANGES SEE SHEET 1.

☆U.S. GOVERNMENT PRINTING OFFICE: 1976-603-768/5097

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, unless otherwise specified.

P.A. WC Other Cust 82	TITLE SCREW, MACHINE-FLAT COUNTERSUNK HEAD, 82°, CROSS-RECESSED, ALUMINUM ALLOY, ANODIC COATED, UNF-2A	MILITARY STANDARD MS 35203
PROCUREMENT SPECIFICATION FF-S-92	SUPERSEDES: MS35262, MS35358 in part, MS35363 in part and AN510 in part.	SHEET 4 OF 4

DD FORM 672-1 (COORDINATED) *PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:11Z
Check the source to verify that this is the current version before use.