INCH-POUND
MS35914H
7 July 2026
SUPERSEDING
MS35914G
14 August 2012

DETAIL SPECIFICATION SHEET

INSERT, SCREW THREAD – THREAD CUTTING

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and procurement specification MIL-DTL-45916.

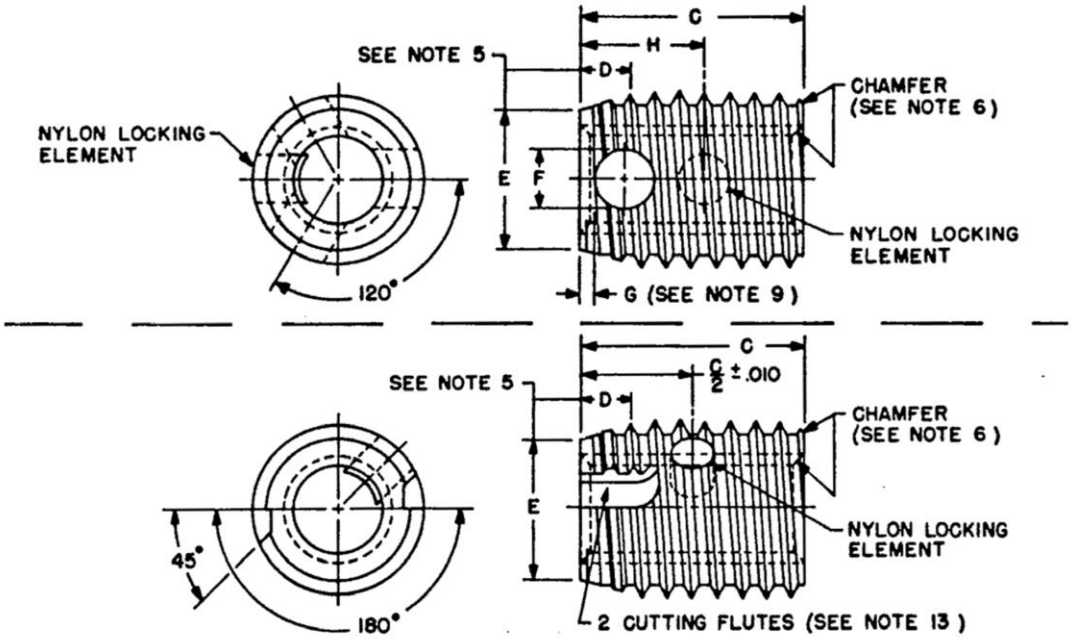


FIGURE 1. INSERT, SCREW, OPTIONAL DESIGNS.

Comments, suggestions, or questions on this document should be addressed to DLA Weapons Support (Richmond) – VEB, 6090 Strathmore Road, Richmond, VA 23237 or e-mailed to STDZNMGT@dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST database at https://assist.dla.mil/.

AMSC N/A FSC 5325

Distribution Statement A. Approved for public release: distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:30Z
Check the source to verify that this is the current version before use.

TABLE I. Regular Wall.

Dash No. *		Internal Thread (-3B)	External Thread (SEE NOTE 4)	C	D		ØE	ØF	H
Carbon Steel	Cor Res Steel			Length ±.010	MAX	MIN	+.002 -.008	±.010	±.010
125	141	.086-56UNC	.140 (9/64)-48	.188	.050	.040	.123	.055	.109
201	251			.156	.050	.040		.055	.094
202	252			.125	.040	.032		.047	----
126*	142*	.086-64UNF	.140 (9/64)-48	.188	.050	.040	.123	.055	.109
101	143	.112-40UNC	.171 (11/64)-40	.234	.054	.044	.148	.062	.125
203	253			.187	.054	.044		.062	.115
204	254			.156	.049	.039		.055	----
102*	144*	.112-48UNF	.171 (11/64)-40	.234	.054	.044	.148	.062	.125
103	145	.138-32UNC	.218 (7/32)-32	.281	.068	.058	.191	.078	.156
205	255			.218	.068	.058		.078	.125
206	256			.187	.056	.048		.070	----
104*	146*	.138-40UNF	.218 (7/32)-32	.281	.068	.058	.191	.078	.156
105	147	.164-32UNC	.250 (1/4)-32	.328	.068	.058	.222	.078	.188
207	257			.250	.068	.058		.078	.135
208	258			.218	.056	.048		.070	----
106*	148*	.164-36UNF	.250 (1/4)-32	.328	.068	.058	.222	.078	.188
107	149	.190-24UNC	.296 (19/64)-24	.375	.092	.082	.259	.109	.219
108	150	.190-32UNF	.296 (19/64)-24	.375	.092	.082	.259	.109	.219
211	261			.296	.092	.082		.109	.172
212	262			.250	.069	.059		.094	----
109	151	.250-20UNC	.375 (3/8)-20	.484	.109	.097	.332	.125	.281
110	152	.250-28UNF	.375 (3/8)-20	.484	.109	.097	.332	.125	.281
215	265			.375	.109	.097		.125	.203
216	266			.312	.099	.089		.109	----
111	153	.3125-18UNC	.468 (15/32)-18	.562	.123	.110	.420	.141	.312
112	154	.3125-24UNF	.468 (15/32)-18	.562	.123	.110	.420	.141	.312
219	269			.469	.123	.110		.141	.250
220	270			.375	.113	.102		.125	----
113	155	.375-16UNC	.562 (9/16)-16	.687	.137	.121	.510	.156	.375
114	156	.375-24UNF	.562 (9/16)-16	.687	.137	.121	.510	.156	.375
223	273			.562	.137	.121		.156	.281
224	274			.437	.126	.113		.141	----
115*	157*	.4375-14UNC	.640 (41/64)-14	.781	.160	.140	.581	.188	----
116*	158*	.4375-20UNF							
117	159	.500-13UNC	.734 (47/64)-13	.906	.185	.160	.668	.219	.500
118	160	.500-20UNF	.734 (47/64)-13	.906	.185	.160	.668	.219	.500
227	277			.750	.185	.160		.219	.391
228	278			.562	.165	.143		.188	----
119*	161*	.5625-12UNC	.812 (13/16)-12	1.000	.198	.170	.742	.234	----
120*	162*	.5625-18UNF							
121	163	.625-11UNC	.906 (29/32)-11	1.125	.213	.183	.827	.250	----
122	164	.625-18UNF	.906 (29/32)-11	1.125	.213	.183	.827	.250	----
231	281			.937	.213	.183		.250	----
232	282			.687	.192	.166		.219	----
123	165	.750-10UNC	1.078 (1-5/64)-10	1.375	.240	.205	.993	.281	----
124	166	.750-16UNF	1.078 (1-5/64)-10	1.375	.240	.205	.993	.281	----
235	285			1.125	.240	.205		.281	----
236	286			.812	.208	.178		.234	----

*These dash numbers are INACTIVE FOR NEW DESIGN AFTER 24 JULY 1975.

INTERCHANGEABILITY

The slotted type inserts covered by dash numbers 1 thru 26 and 41 thru 66 given in previous revisions of this standard are cancelled after 23 April 1965 and superseded by dash numbers 101 thru 126 and 141 thru 166, respectively, given in the current revision of this standard.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:30Z
Check the source to verify that this is the current version before use.

TABLE II. Thin Wall.

Dash No. Cor Res Steel	Internal Thread (-3B)	External Thread (SEE NOTE 4)	C Length ±.010	D MAX	D MIN	ØE +.002 -.005	ØF ±.010
301	.112-40UNC	.156 (5/32)-40	.234	.054	.044	.136	.062
302			.187	.054	.044		.062
303			.156	.046	.038		.055
304	.138-32UNC	.187 (3/16)-32	.281	.068	.058	.160	.078
305			.218	.068	.058		.078
306			.187	.064	.054		.070
307	.164-32UNC	.218 (7/32)-32	.328	.068	.058	.191	.078
308			.250	.068	.058		.078
309			.218	.064	.054		.070
310	.190-32UNF	.265 (17/64)-32	.375	.092	.082	.237	.109
311			.296	.092	.082		.109
312			.250	.084	.074		.094
313	.250-28UNF	.343 (11/32)-28	.484	.109	.097	.310	.125
314			.375	.109	.097		.125
315			.312	.099	.089		.109
316	.3125-24UNF	.406 (13/32)-24	.562	.123	.110	.368	.141
317			.469	.123	.110		.141
318			.375	.113	.102		.125
319	.375-24UNF	.500 (1/2)-20	.687	.137	.121	.457	.156
320			.562	.137	.121		.156
321			.437	.126	.113		.141
322	.500-20UNF	.625 (5/8)-18	.906	.185	.160	.576	.219
323			.750	.185	.160		.219
324			.562	.165	.143		.188

TABLE III. Recommended Hole Sizes.

Internal Thread	Regular Wall: For high strength light alloys of less than average machinability, cast iron, malleable iron and mild steel		Regular Wall: For medium strength light alloys of average machinability, cast iron and high strength thermosetting plastics		Regular Wall: For low strength light alloys of excellent machinability, thermoplastics and thermosetting plastics		Thin Wall: For all strength alloys, cast iron, malleable iron and all plastics	
	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN
.086	.134	.131	.131	.129	.129	.127	----	----
.112	.162	.159	.159	.156	.156	.152	.146	.140
.138	.207	.203	.203	.198	.198	.194	.175	.169
.164	.238	.234	.234	.230	.230	.226	.206	.200
.190	.281	.275	.275	.270	.270	.264	.252	.246
.250	.356	.349	.349	.343	.343	.336	.330	.322
.3125	.447	.440	.440	.433	.433	.425	.390	.381
.375	.538	.530	.530	.521	.521	.514	.479	.469
.4375	.613	.605	.605	.594	.594	.585	----	----
.500	.704	.694	.694	.684	.684	.674	.605	.591
.5625	.780	.769	.769	.759	.759	.748	----	----
.625	.871	.859	.859	.847	.847	.835	----	----
.750	1.039	1.026	1.026	1.013	1.013	1.000	----	----

Note: Hole preparation for locking inserts – Countersink to outside diameter of insert with 60° included angle.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:30Z
Check the source to verify that this is the current version before use.

NOTES:

1. MATERIAL: Carbon steel, AISI 1117, in accordance with SAE AIR4127.
Corrosion-resisting steel, Type 303 (UNS S30300) or 303MA (UNS S30345), annealed condition, hot or cold finish (as rolled) in accordance with ASTM A582/A582M, SAE AMS5640, or SAE AMS5638.

2. HEAT TREATMENT: Carbon steel inserts shall be case hardened to a depth of .003-.005 inch with a Rockwell hardness of 75 HR15N minimum.

3. PROTECTIVE COATING: Carbon steel inserts shall be cadmium plated in accordance with SAE AMS-QQ-P-416, Type II, Class 3.
Corrosion-resisting steel inserts shall be passivated in accordance with SAE AMS2700.

4. THREADS: Internal threads shall be in accordance with Screw Thread Standards for Federal Services FED-STD-H28.
External threads shall be self-tapping and have a 60° thread approximating American National form.

5. DIMENSIONS: All dimensions are in inches.
"D" dimension refers to the tapered portion of the external thread (pilot length).
"E" dimension refers to the small end of the tapered portion of the external thread (pilot diameter).

6. CHAMFER: Chamfer internal and external threads to one thread length.

7. PART NUMBER: The MS part number consists of the MS number, plus the dash number. Example: MS35914-125.
For internal thread lock, add “L” after the dash number. Example: MS35914-125L.

8. LOCKING ELEMENT: Nylon locking element is available only for inserts having a specified "H” dimension.

9. "G" dimension equals approximately 60% of external thread pitch.

10. Thin wall inserts are supplied in corrosion-resisting steel only. No internal lock is available.

11. Referenced documents shall be of the issue in effect on the date of invitation for bid.

12. For design feature purposes, this standard takes precedence over procurement documents referenced herein.

13. Cutting flutes shall extend beyond the 2nd full thread.

14. CHANGES FROM PREVIOUS ISSUE. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

MILITARY INTEREST

Custodians:
Army – AR
DLA – GS

Preparing Activity:
DLA – GS6

(Project 5325-2026-003)

Review Activities
Army – AT, AV, MI

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:30Z
Check the source to verify that this is the current version before use.